



EKSELANS BY ITS

MIXER/ DEMIXER RETURN PATH MI RP / MI RP IEC

Return path mixer / demixer
Ekoax compatible

REFERENCE		MI RP		MI RP IEC	
Code		132001		132002	
Inputs		DATA	TV	DATA	TV
Input connector		F	F	F	IEC Macho
Frequency range	MHz	5-65	85-2150	5-65	85-1000
Insertion loss	dB	<1	<1,5	<0,5	<1
Rejection	dB	>30	>25	>40	>32
Outputs	N°	1= DATA + TV		1= DATA + TV	
Output connectors		F		IEC Hembra	
DC Pass		NO	SI	NO	SI




MI RP



MI RP IEC

INSTALLATION SCHEME

Installation with line amplifier without return path

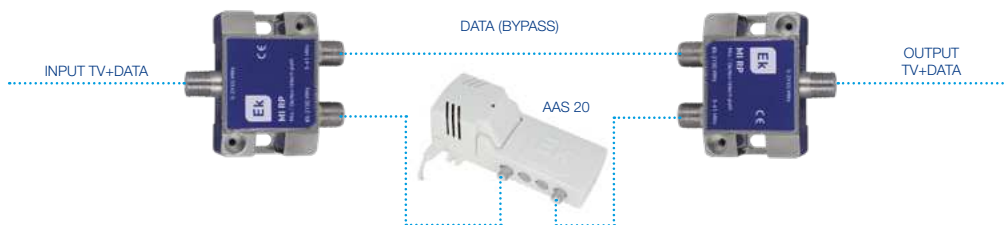

Installation of MI RP IEC mix-demix in a wall-socket

