




DAMPPROOF 5x THROUGHWIRING IP65

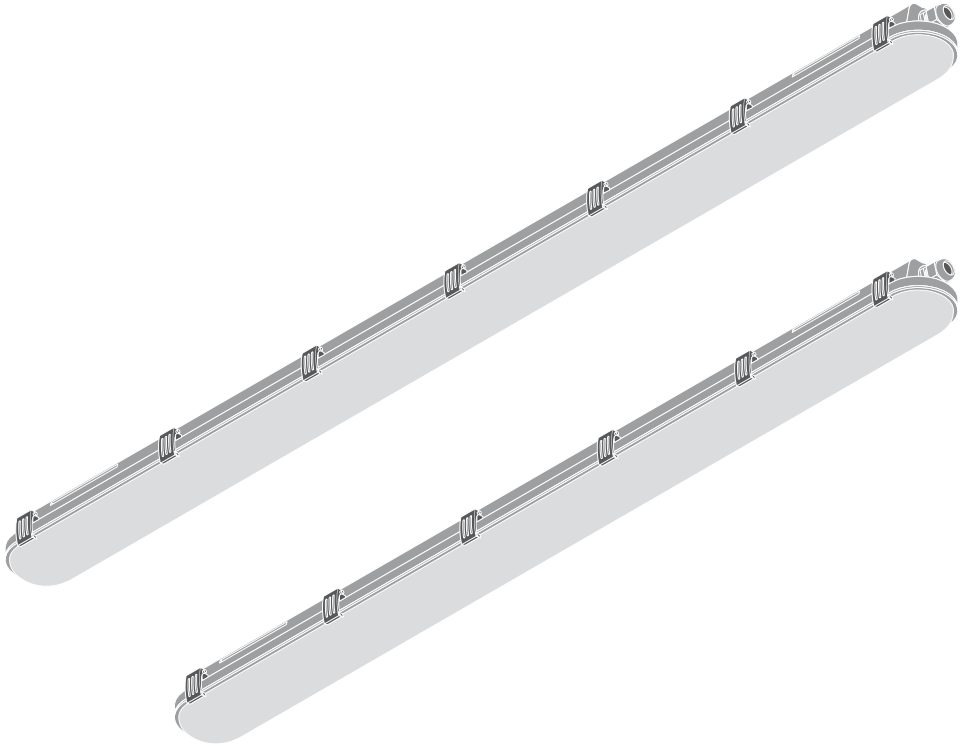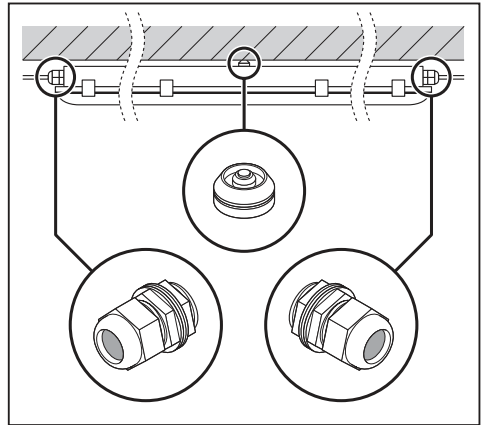

	EAN	l x w x h [mm]	W	V _{AC}	Hz	lm	lm/W	K
DP 5TH 1200 32W 840 IP65 GY	4058075541924	1200 x 82 x 68	32	220-240 V	50/60 Hz	4400	135	4000
DP 5TH 1500 46W 840 IP65 GY	4058075541948	1500 x 82 x 68	46	220-240 V	50/60 Hz	6400	135	4000

	EAN	IP	IK	∇	R _a	🌡️ (°C)	PF	👤
DP 5TH 1200 32W 840 IP65 GY	4058075541924	65	08	110	> 80	-25...+40	> 0.9	1.6 kg
DP 5TH 1500 46W 840 IP65 GY	4058075541948	65	08	110	> 80	-25...+40	> 0.9	1.9 kg

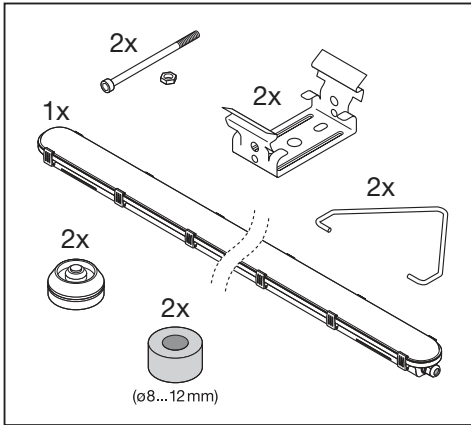


1x
DAMPPROOF
5TH IP65



2x
DAMPPROOF
5TH IP65







3x
DAMPPROOF
5TH IP65









... nx
DAMPPROOF
5TH IP65

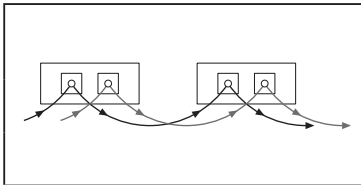

n	B16	C10	C16
DAMPPROOF 1200	27	24	39
DAMPPROOF 1500	26	23	37

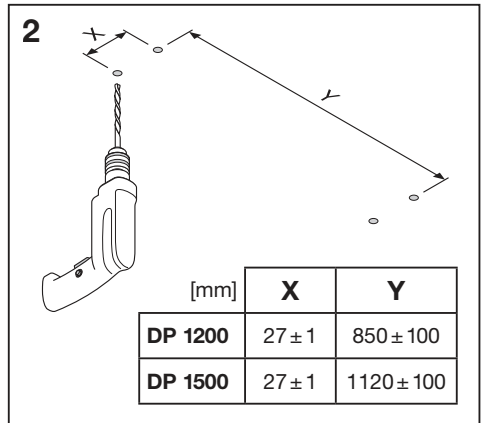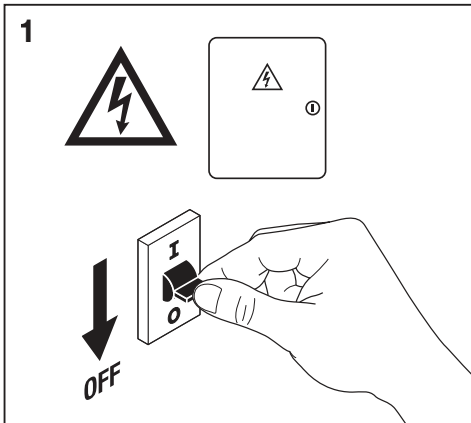

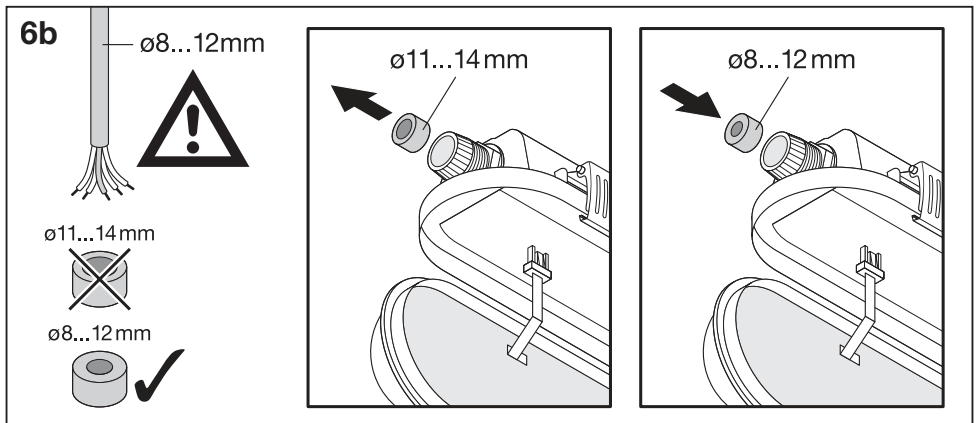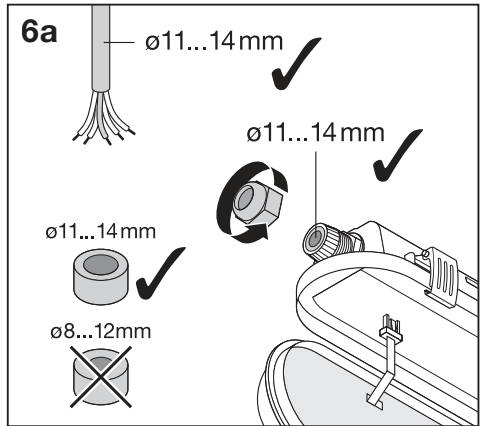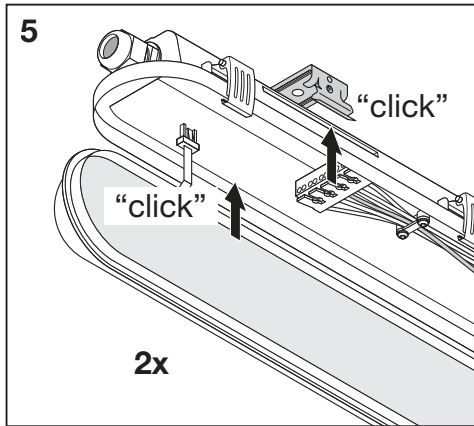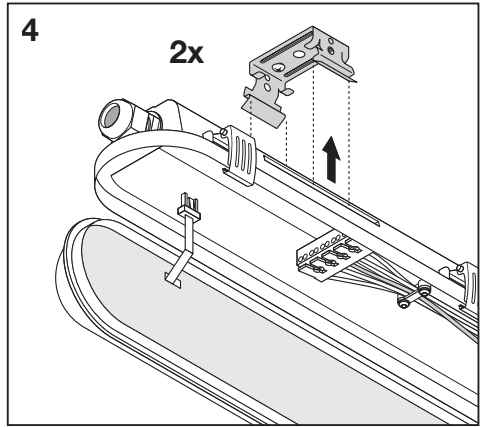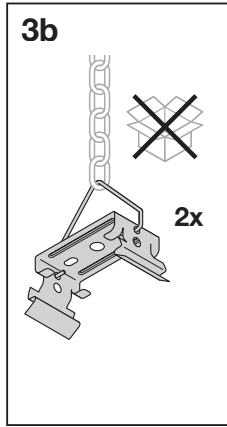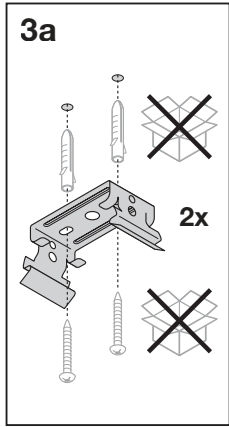

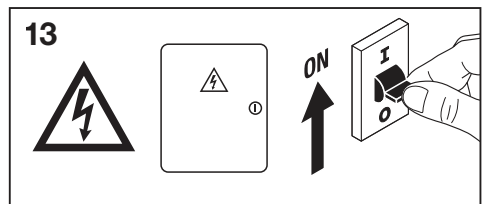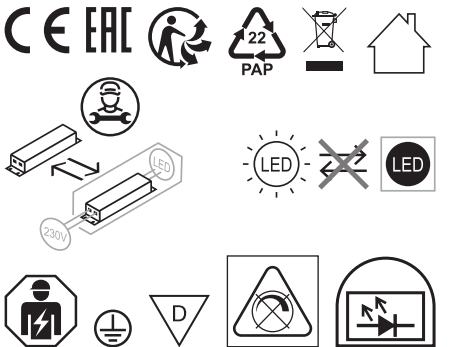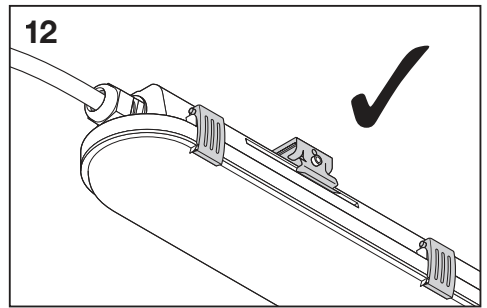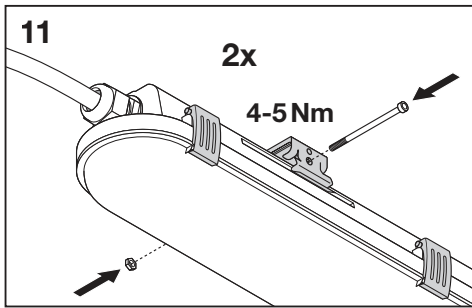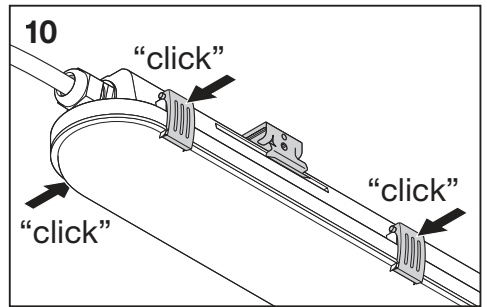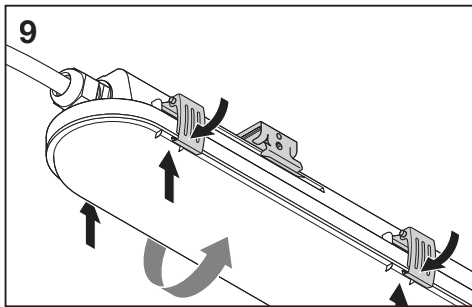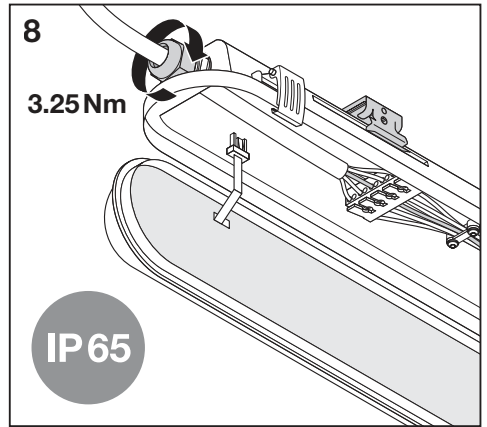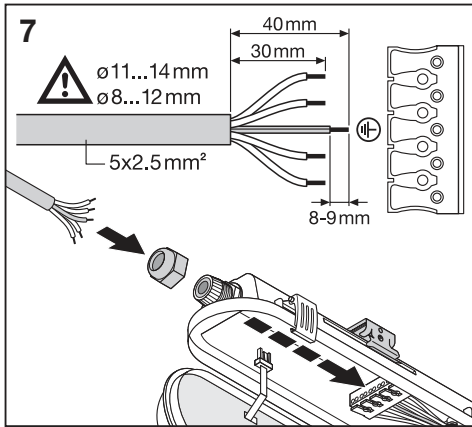

C10449057
 G11125242
 16.07.21



LEDVANCE GmbH
 Steinerne Furt 62
 86167 Augsburg, Germany
www.ledvance.com