



PANEL COMFORT 600/625 DALI

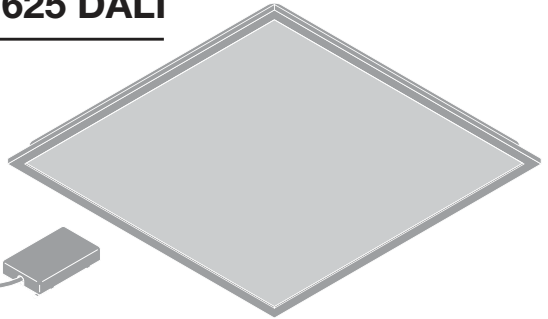

(PL CMFT 600)



	EAN	l x w x h [mm]	W	EM W* (230V DC)	V _{AC}	Hz	lm	lm/W	EM lm* (230V DC)
PL CMFT 600 P 28W 830 DALIVR	4099854014352	595 x 595 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 600 P 28W 840 DALIVR	4099854014505	595 x 595 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 600 P 28W 830 U19 DALIVR	4099854014703	595 x 595 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 600 P 28W 840 U19 DALIVR	4099854014789	595 x 595 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 600 P 33W 830 DALIVR	4099854014925	595 x 595 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 600 P 33W 840 DALIVR	4099854015342	595 x 595 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 600 P 33W 865 DALIVR	4099854015410	595 x 595 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 600 P 33W 830 U19 DALIVR	4099854015304	595 x 595 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 600 P 33W 840 U19 DALIVR	4099854015229	595 x 595 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 600 P 33W 865 U19 DALIVR	4099854015243	595 x 595 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 625 P 28W 830 DALIVR	4099854014291	620 x 620 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 625 P 28W 840 DALIVR	4099854014314	620 x 620 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 625 P 28W 830 U19 DALIVR	4099854014437	620 x 620 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 625 P 28W 840 U19 DALIVR	4099854014482	620 x 620 x 32	28	5.5	220-240V	0/50/60	3640	130	500
PL CMFT 625 P 33W 830 DALIVR	4099854014338	620 x 620 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 625 P 33W 840 DALIVR	4099854014390	620 x 620 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 625 P 33W 830 U19 DALIVR	4099854014581	620 x 620 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 625 P 33W 840 U19 DALIVR	4099854014680	620 x 620 x 32	33	6	220-240V	0/50/60	4320	130	590
PL CMFT 625 P 33W 865 U19 DALIVR	4099854014727	620 x 620 x 32	33	6	220-240V	0/50/60	4320	130	590

	EAN	K	IP	IK	∠	R _a	°(°C)	PF	👤
PL CMFT 600 P 28W 830 DALIVR	4099854014352	3000	40/20	02	110°	> 80	-10...+50	> 0.9	1.7 kg
PL CMFT 600 P 28W 840 DALIVR	4099854014505	4000	40/20	02	110°	> 80	-10...+50	> 0.9	1.7 kg
PL CMFT 600 P 28W 830 U19 DALIVR	4099854014703	3000	40/20	02	90°	> 80	-10...+50	> 0.9	1.9 kg
PL CMFT 600 P 28W 840 U19 DALIVR	4099854014789	4000	40/20	02	90°	> 80	-10...+50	> 0.9	1.9 kg
PL CMFT 600 P 33W 830 DALIVR	4099854014925	3000	40/20	02	110°	> 80	-10...+50	> 0.9	1.8 kg
PL CMFT 600 P 33W 840 DALIVR	4099854015342	4000	40/20	02	110°	> 80	-10...+50	> 0.9	1.8 kg
PL CMFT 600 P 33W 865 DALIVR	4099854015410	6500	40/20	02	110°	> 80	-10...+50	> 0.9	1.8 kg
PL CMFT 600 P 33W 830 U19 DALIVR	4099854015304	3000	40/20	02	90°	> 80	-10...+50	> 0.9	1.9 kg
PL CMFT 600 P 33W 840 U19 DALIVR	4099854015229	4000	40/20	02	90°	> 80	-10...+50	> 0.9	1.9 kg
PL CMFT 600 P 33W 865 U19 DALIVR	4099854015243	6500	40/20	02	90°	> 80	-10...+50	> 0.9	1.9 kg
PL CMFT 625 P 28W 830 DALIVR	4099854014291	3000	40/20	02	110°	> 80	-10...+50	> 0.9	2.0 kg
PL CMFT 625 P 28W 840 DALIVR	4099854014314	4000	40/20	02	110°	> 80	-10...+50	> 0.9	2.0 kg
PL CMFT 625 P 28W 830 U19 DALIVR	4099854014437	3000	40/20	02	90°	> 80	-10...+50	> 0.9	2.1 kg
PL CMFT 625 P 28W 840 U19 DALIVR	4099854014482	4000	40/20	02	90°	> 80	-10...+50	> 0.9	2.1 kg
PL CMFT 625 P 33W 830 DALIVR	4099854014338	3000	40/20	02	110°	> 80	-10...+50	> 0.9	2.1 kg
PL CMFT 625 P 33W 840 DALIVR	4099854014390	4000	40/20	02	110°	> 80	-10...+50	> 0.9	2.1 kg
PL CMFT 625 P 33W 830 U19 DALIVR	4099854014581	3000	40/20	02	90°	> 80	-10...+50	> 0.9	2.2 kg
PL CMFT 625 P 33W 840 U19 DALIVR	4099854014680	4000	40/20	02	90°	> 80	-10...+50	> 0.9	2.2 kg
PL CMFT 625 P 33W 865 U19 DALIVR	4099854014727	6500	40/20	02	90°	> 80	-10...+50	> 0.9	2.2 kg

