

Doc. N.° 1SDH000719R0502 - L4099

SACE Tmax XT


UVR - Sganciatore di minima tensione cablato e non cablato, per interruttore XT1-XT2-XT3-XT4 fisso/rimovibile.
UVR - Wired and non-wired undervoltage release for XT1-XT2-XT3-XT4 fixed/plug-in circuit-breakers.
UVR - Unterspannungsauslöser, verdrahtet verdrahtet und nicht verdrahtet, für XT1-XT2-XT3-XT4 Leistungsschalter vom festen Typ/Steckbaren.
UVR - Déclencheur à minimum de tension câblé et non câblé, pour disjoncteur XT1-XT2-XT3-XT4 fixe/debrochable.
UVR - Relé de minima tensión cableado y no cableado, para interruptor XT1-XT2-XT3-XT4 fijo/removible.

XT1-XT2-XT3-XT4/III-IV

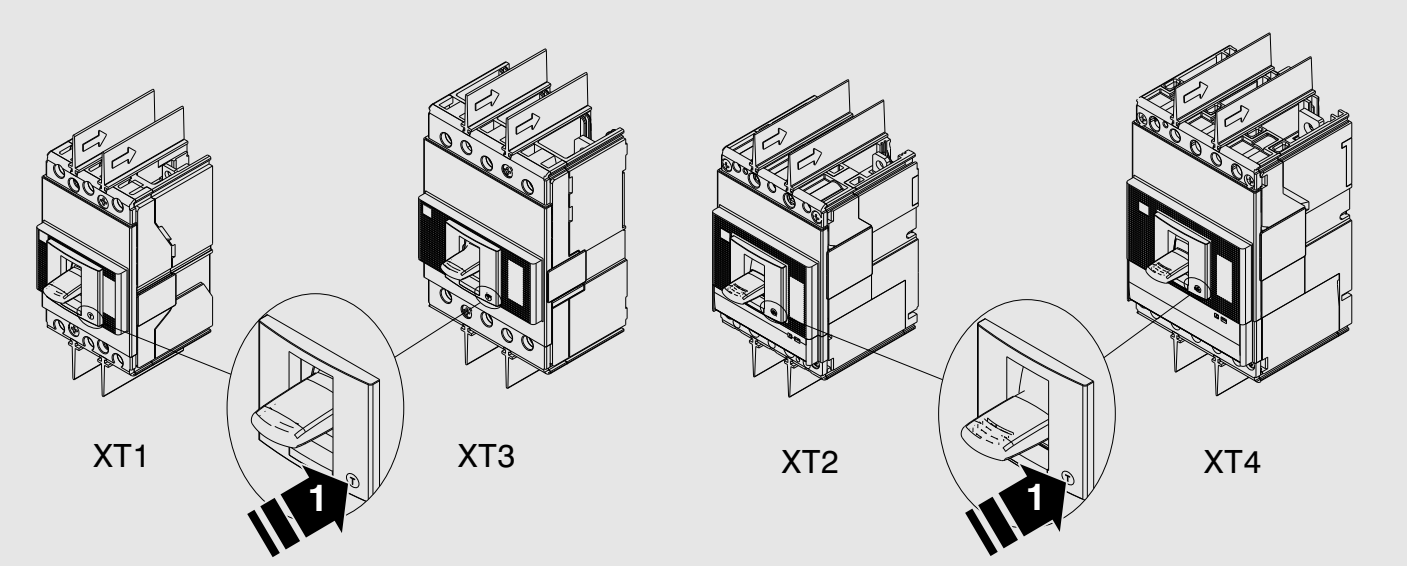

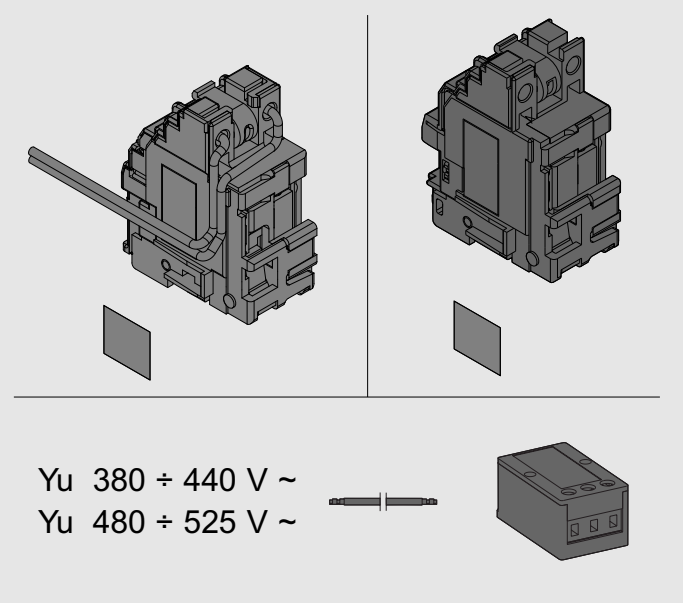


A

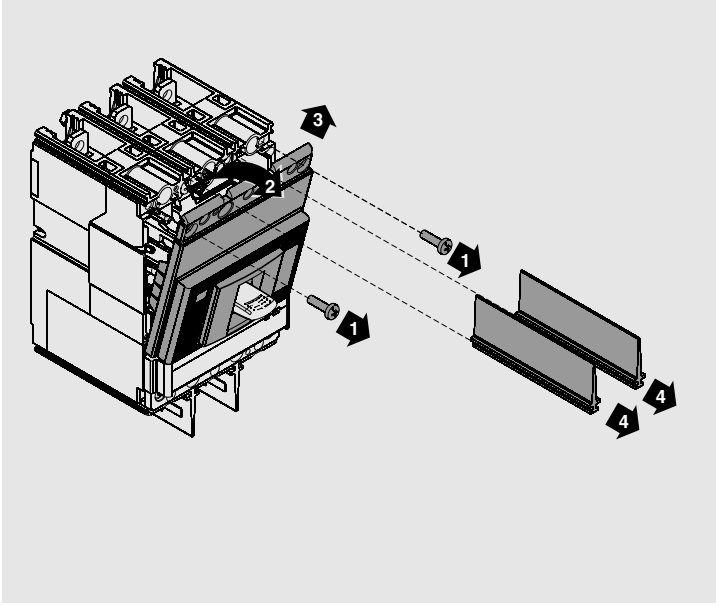


Power and productivity
for a better world™

B

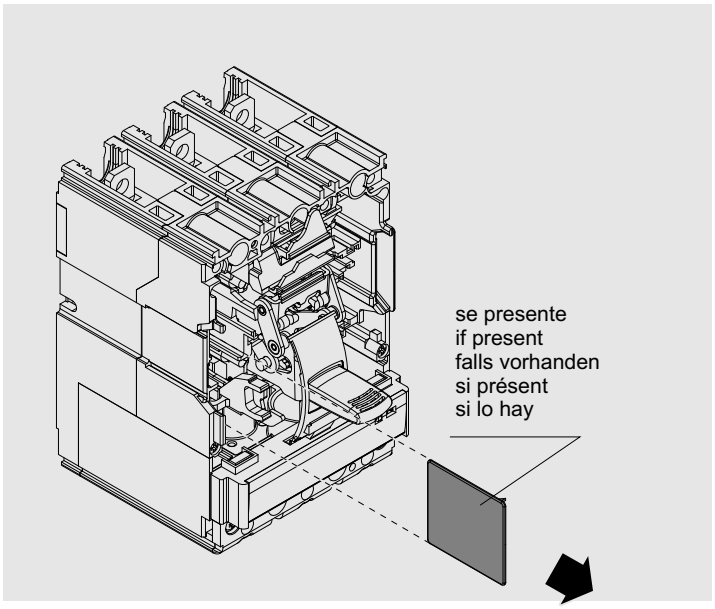

C


FOR NOT CABLED ONLY



MAX WIRE NUMBER			
WIRE SECTION	0,5 mm²	1 mm²	1,5 mm²
XT1	5	2	2
XT2	13	9	8
XT3	12	9	7
XT4	13	9	8


D

FOR NOT CABLED ONLY

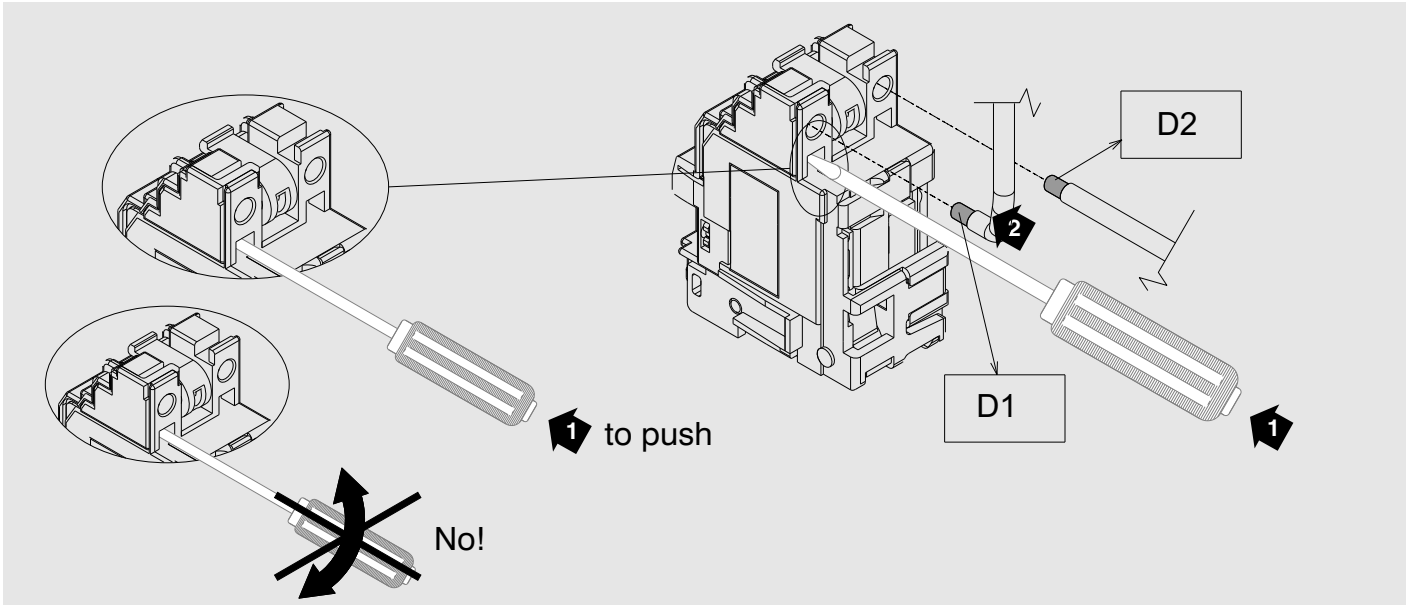


E

III

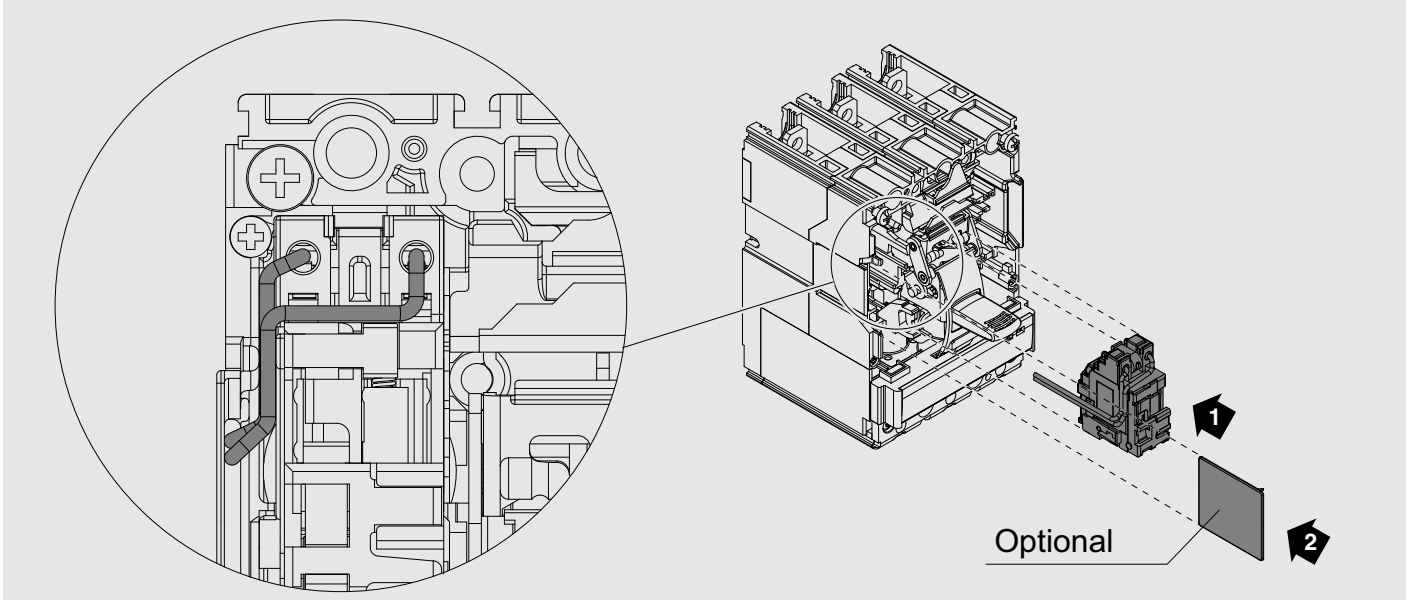


F

IV UVR on 3P

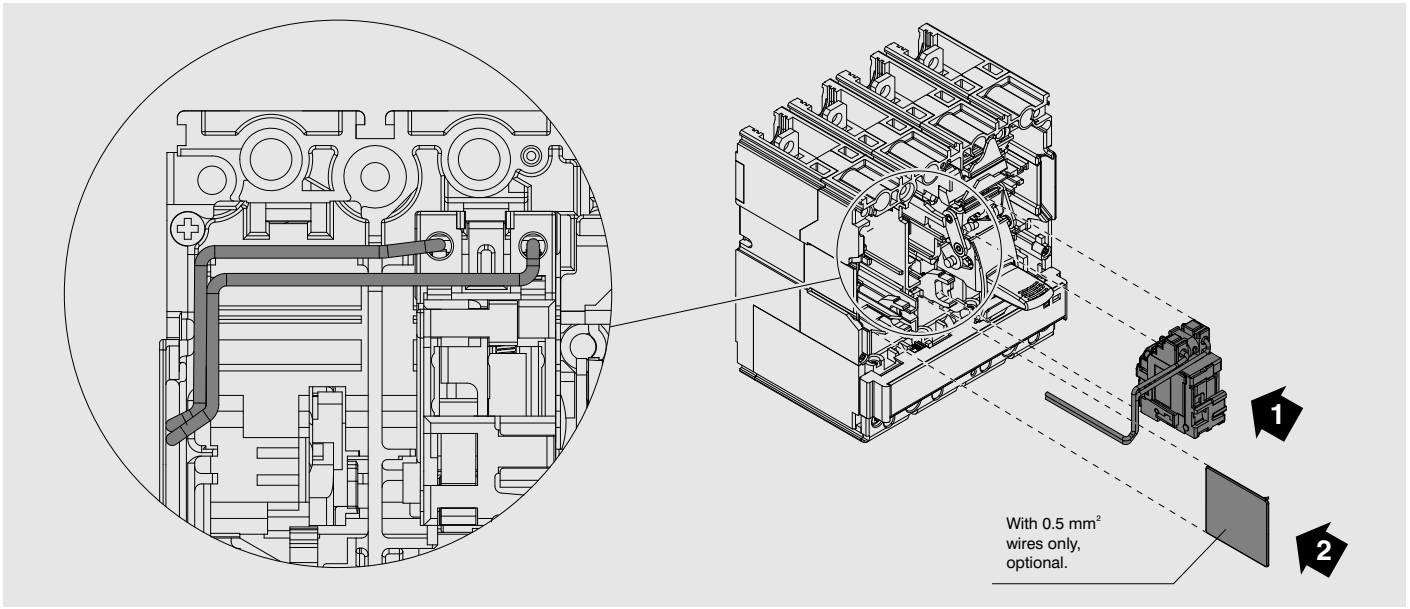


G


IV with UVR on 4P

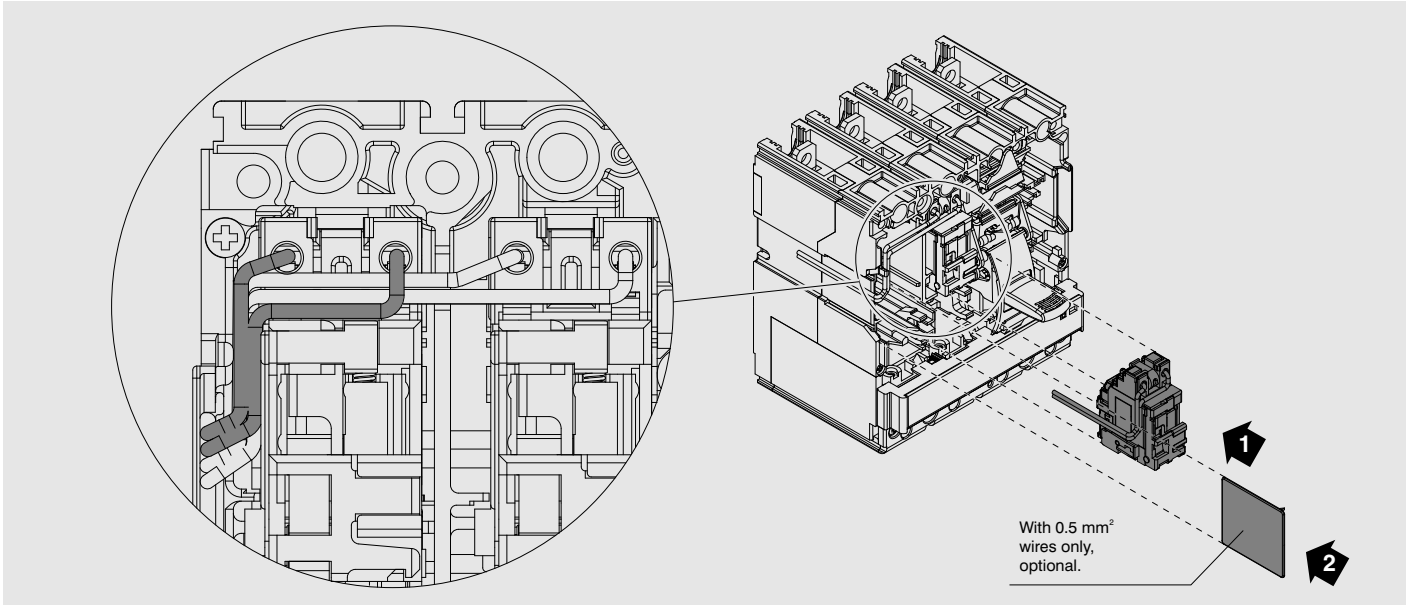


H

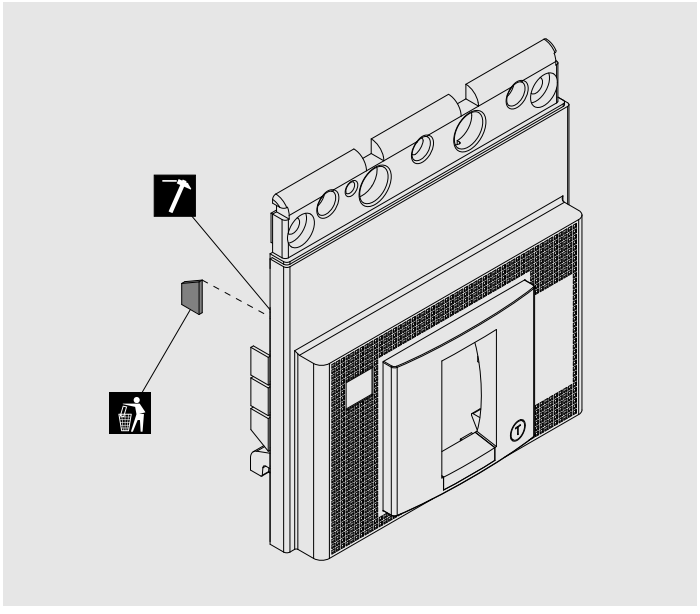

I

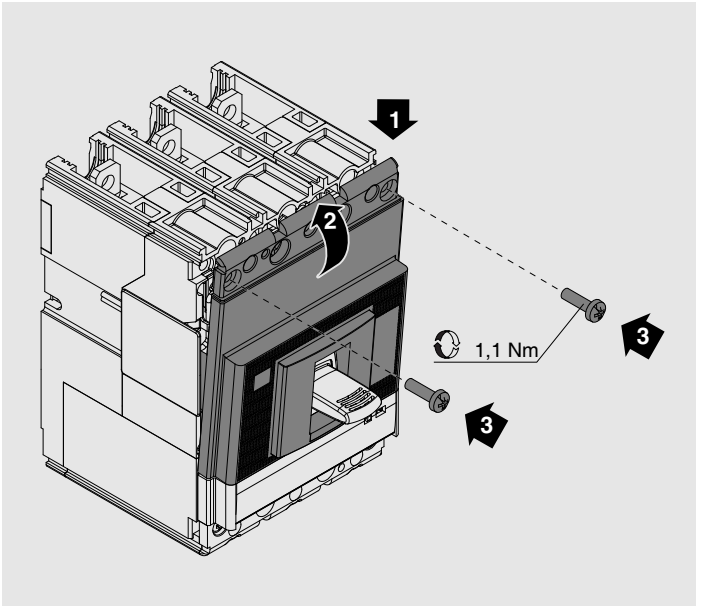


L

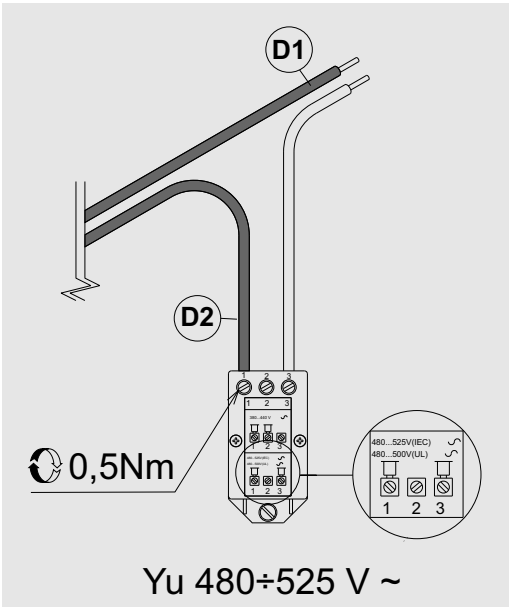


Yu 480÷525 V ~

M

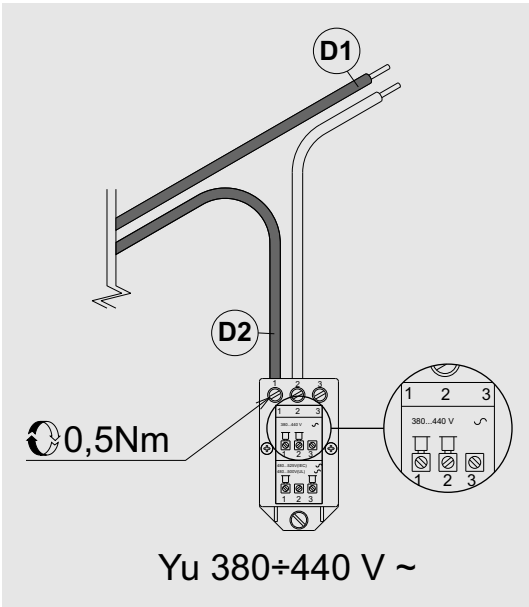


Yu 380÷440 V ~


N

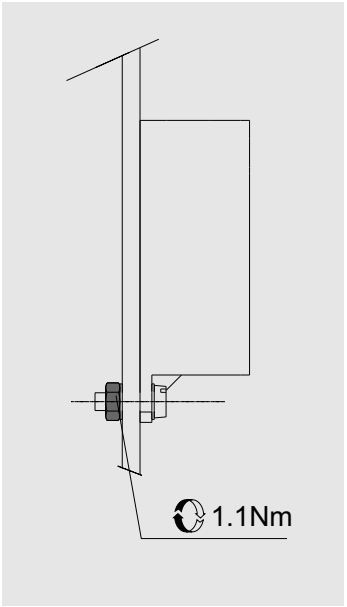

O

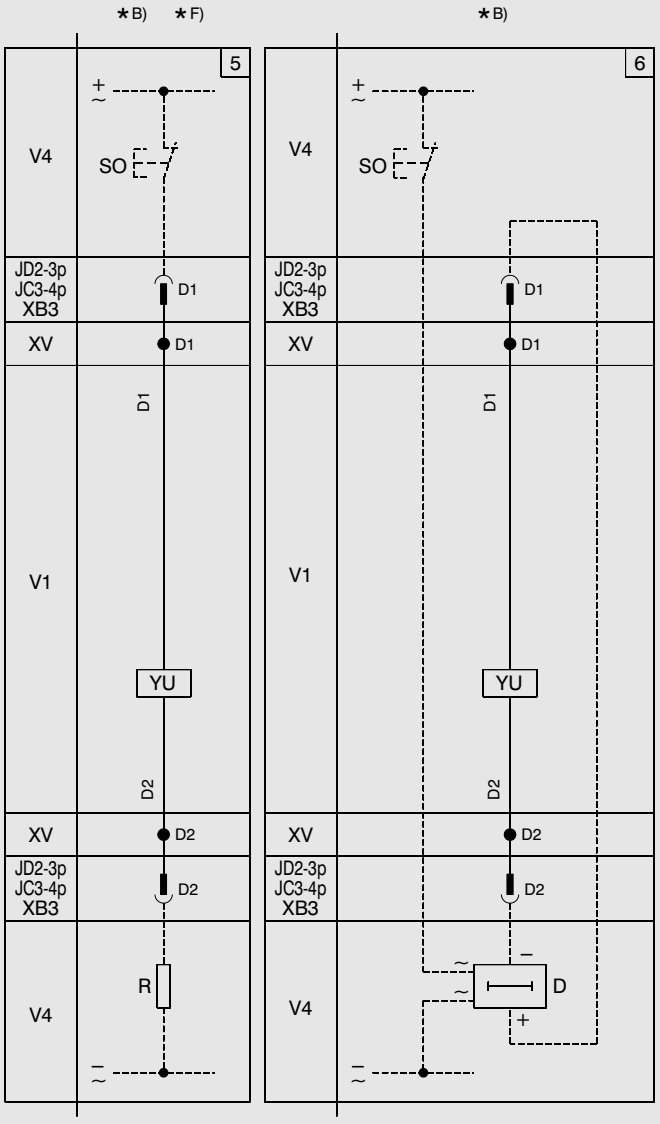

P

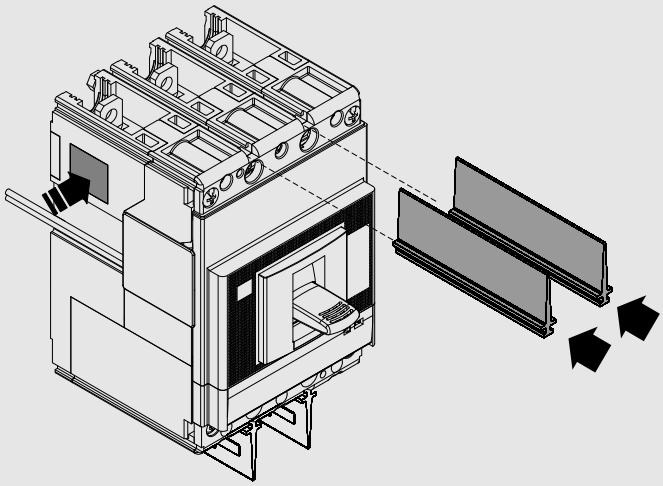

For more information please contact:

ABB S.p.A.
ABB SACE Division
Via Baioni, 35
24123 Bergamo - Italy
Phone: +39 035 395 111
Fax: +39 035 395 306 - 433

www.abb.com

Power and productivity
for a better world™