
Doc. N.° 1SDH000721R0002 - L5828


SACE Tmax

Parte fissa di interruttore rimovibile/estraibile XT2
Fixed part for plug-in/withdrawable circuit-breakers XT2
Festteil/unterteil für leistungsschalter in ausfahrbarer ausführung XT2
Partie fixe pour disjoncteur debrochable/debrochable sur chariot XT2
Parte fija para interruptor removible/extraible XT2


XT2-P / III-IV

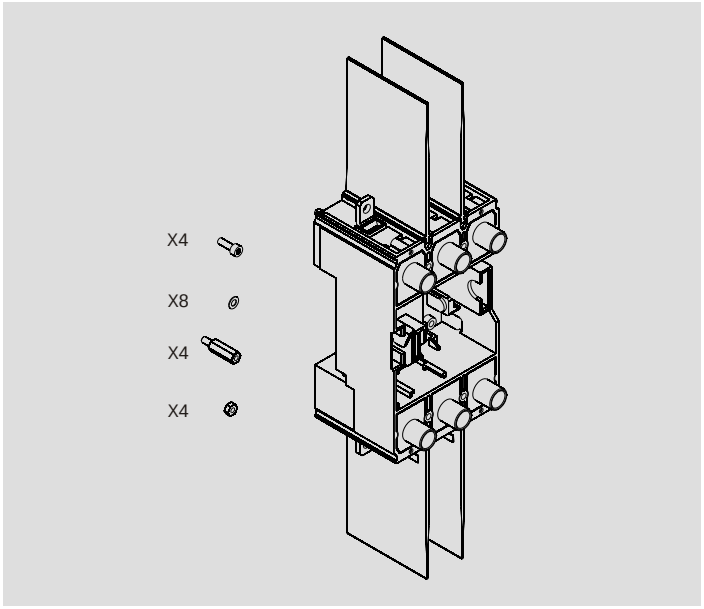


XT2-W / III-IV

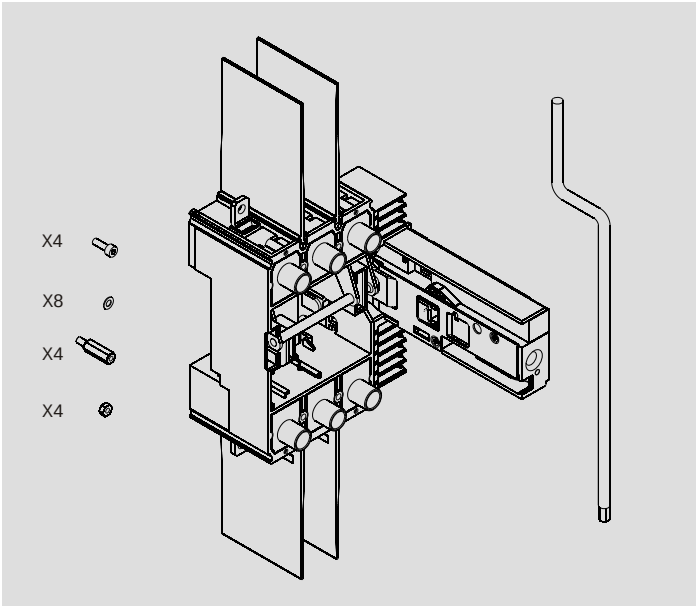

1 XT2-P / III-IV

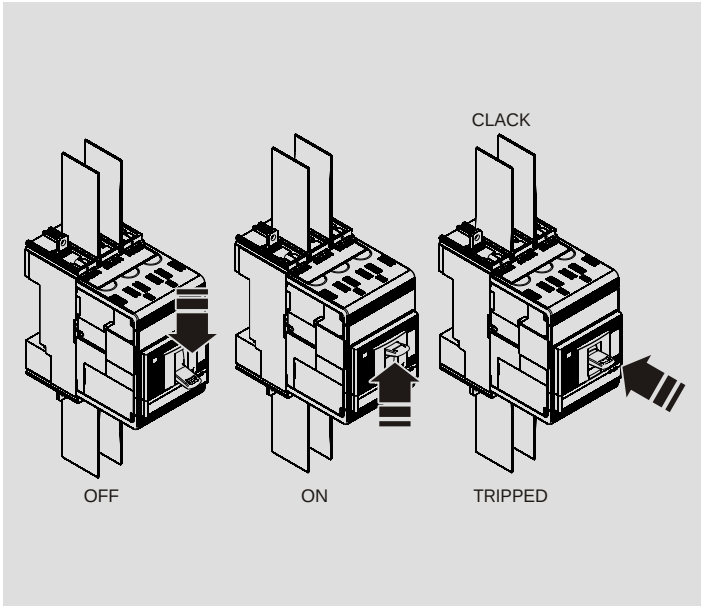


2 XT2-W / III-IV

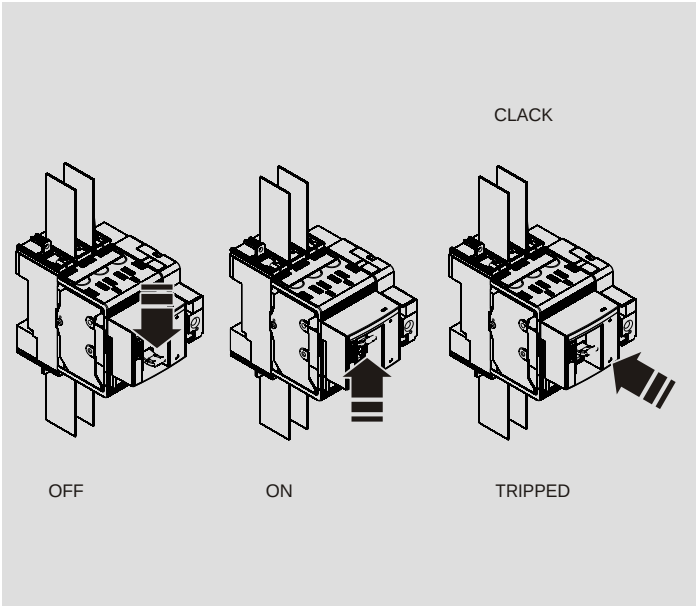


Power and productivity
for a better world™


3 XT2/III-IV/P-W

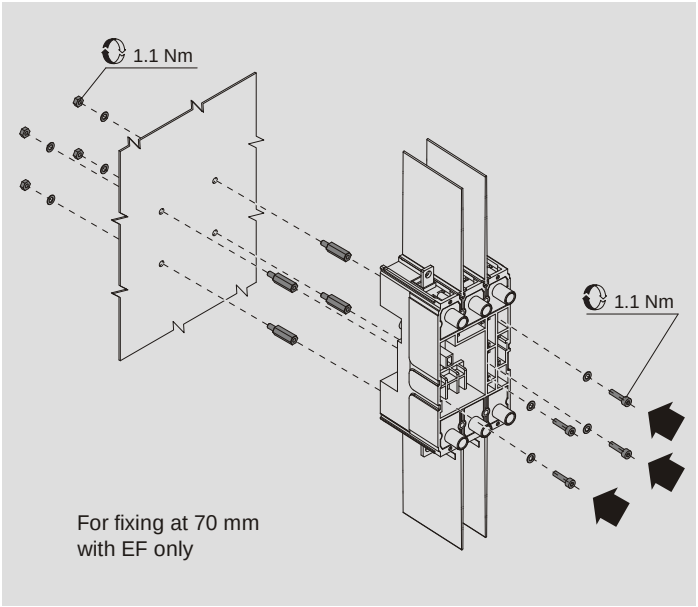

4 XT2/III-IV/P-W

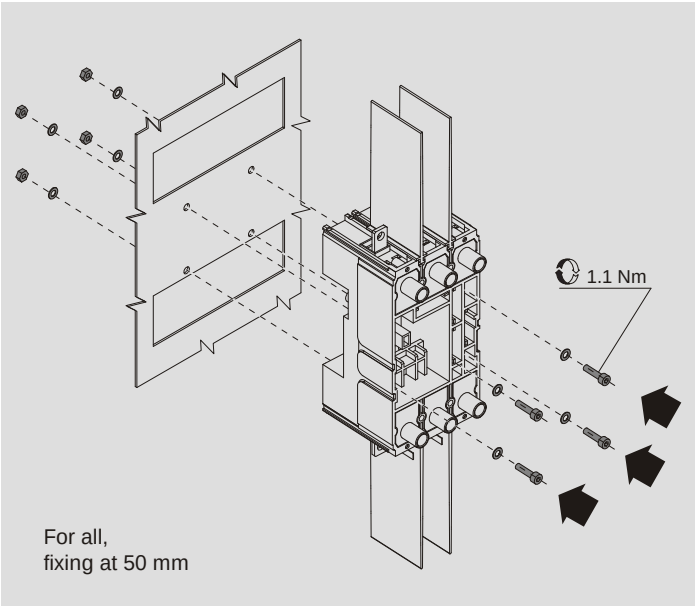


5 XT2/III-IV/P-W

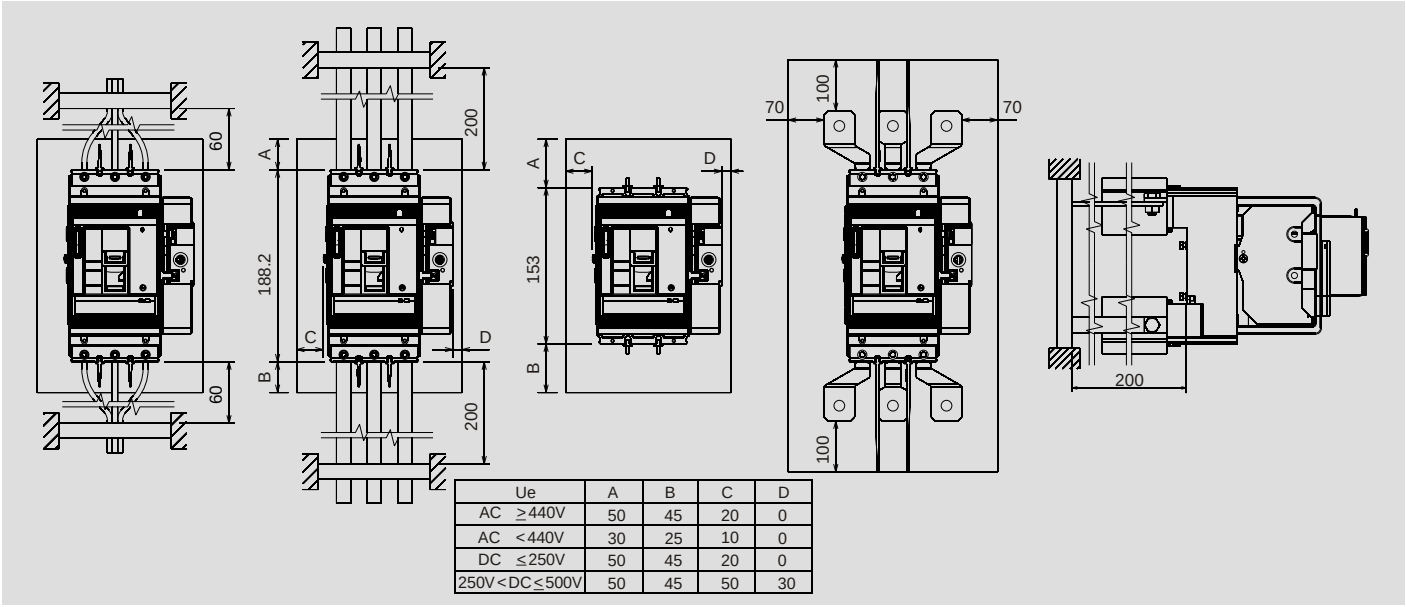


Ue	A	B	C	D
AC ≥440V	50	45	20	0
AC <440V	30	25	10	0
DC ≤250V	50	45	20	0
250V<DC≤500V	50	45	50	30


6 XT2/III-IV/P

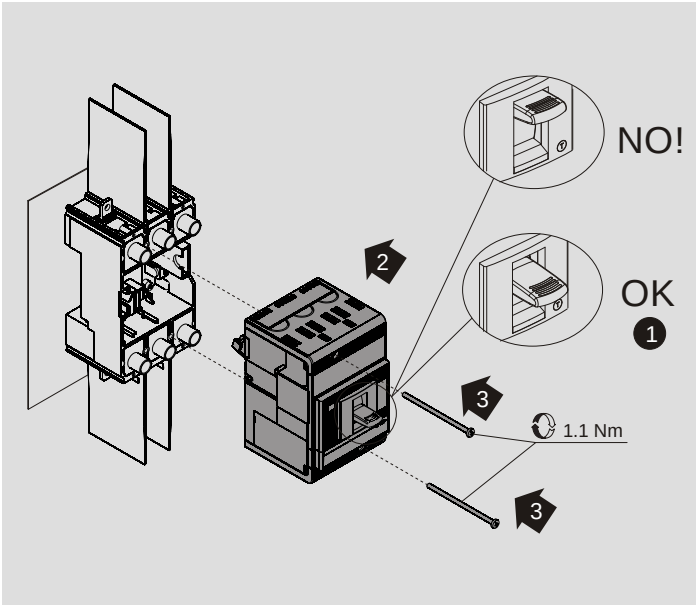


7 XT2/III-IV/P

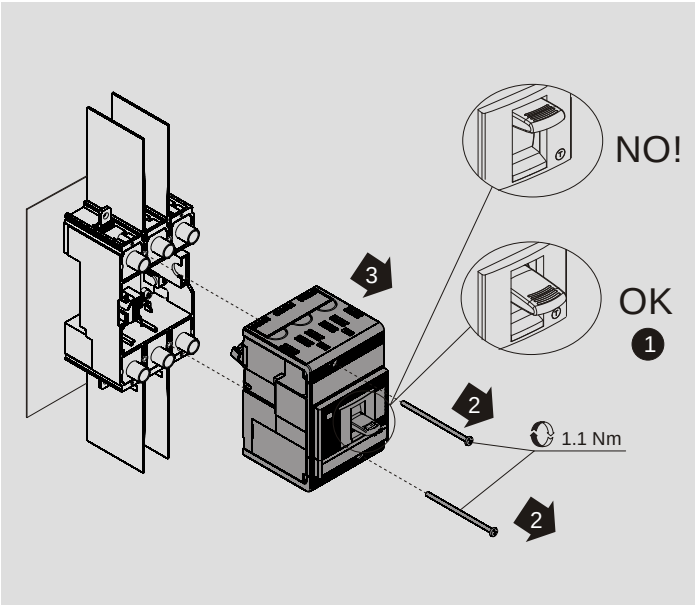


8 XT2/III-IV/W

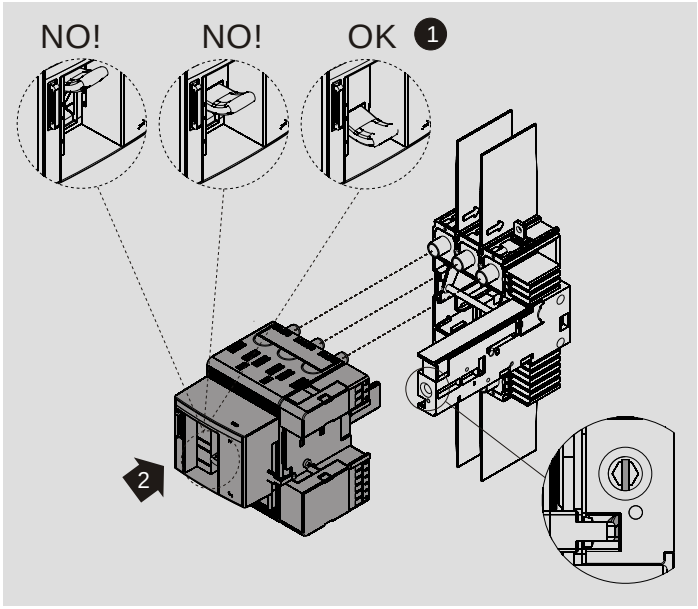


9 XT2/III-IV/W

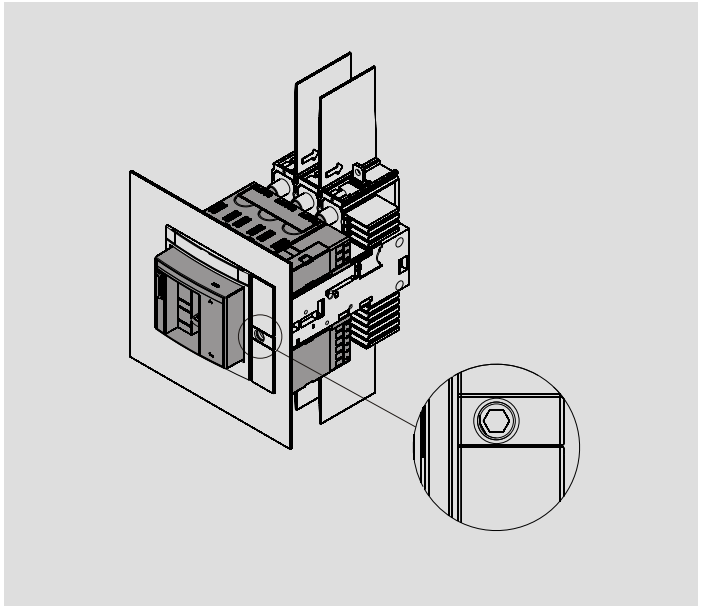


10 XT2/III-IV/W

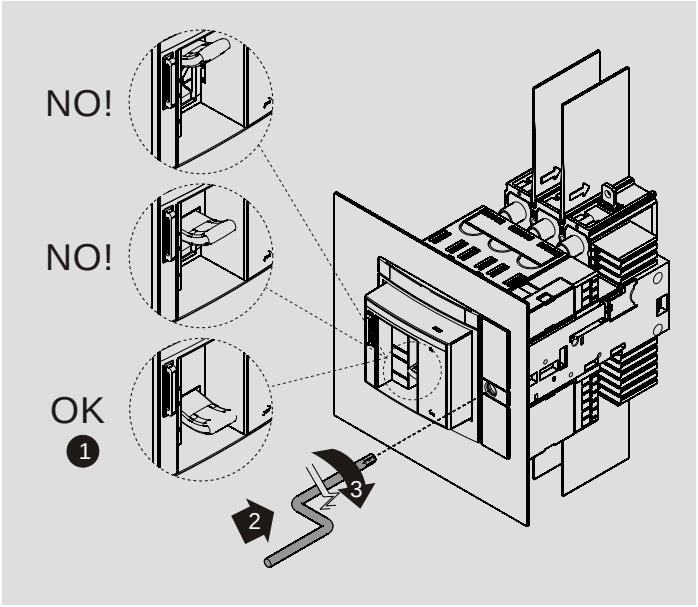


11 XT2/III-IV/W

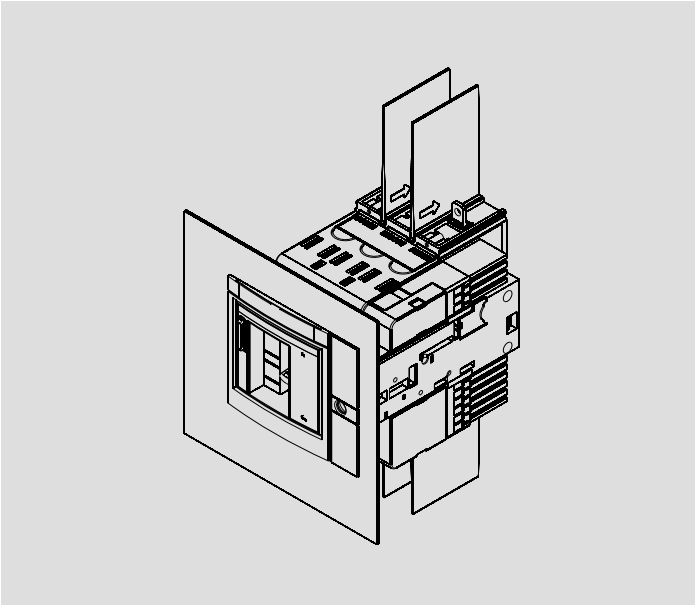

12 XT2/III-IV/W

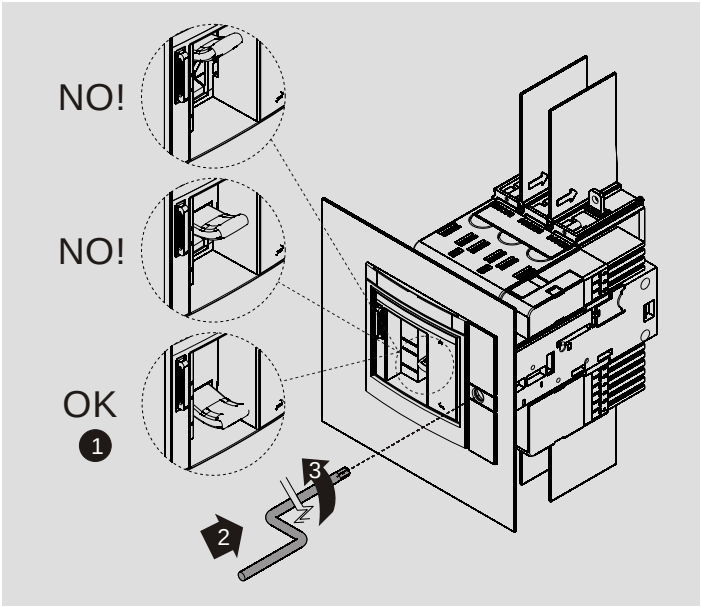


13 XT2/III-IV/W

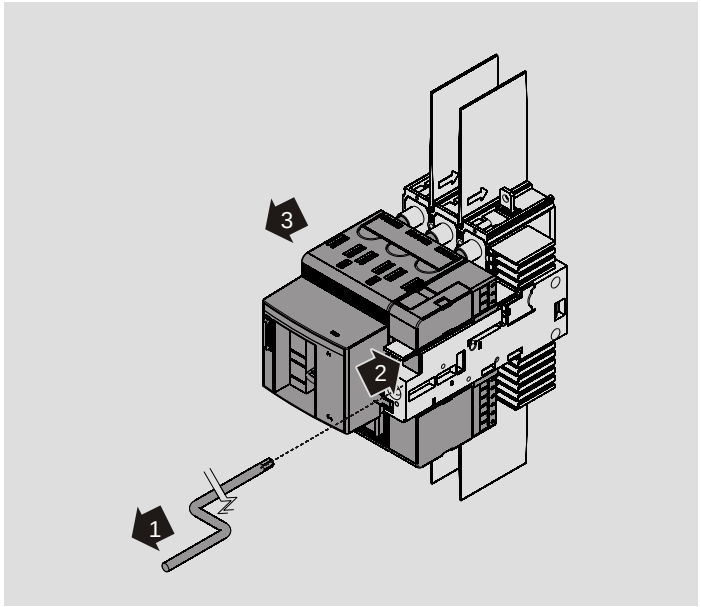


14

XT2-P/III-IV/ES

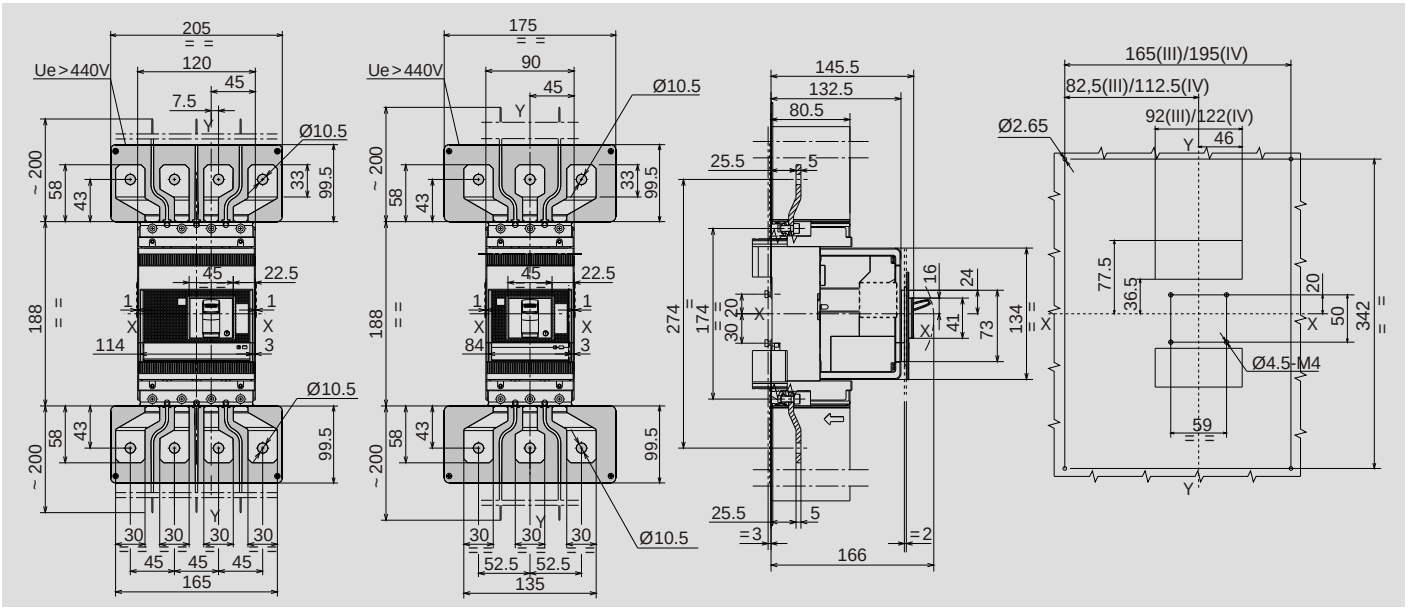


15


XT2-P/III-IV/Fc-Cu Al

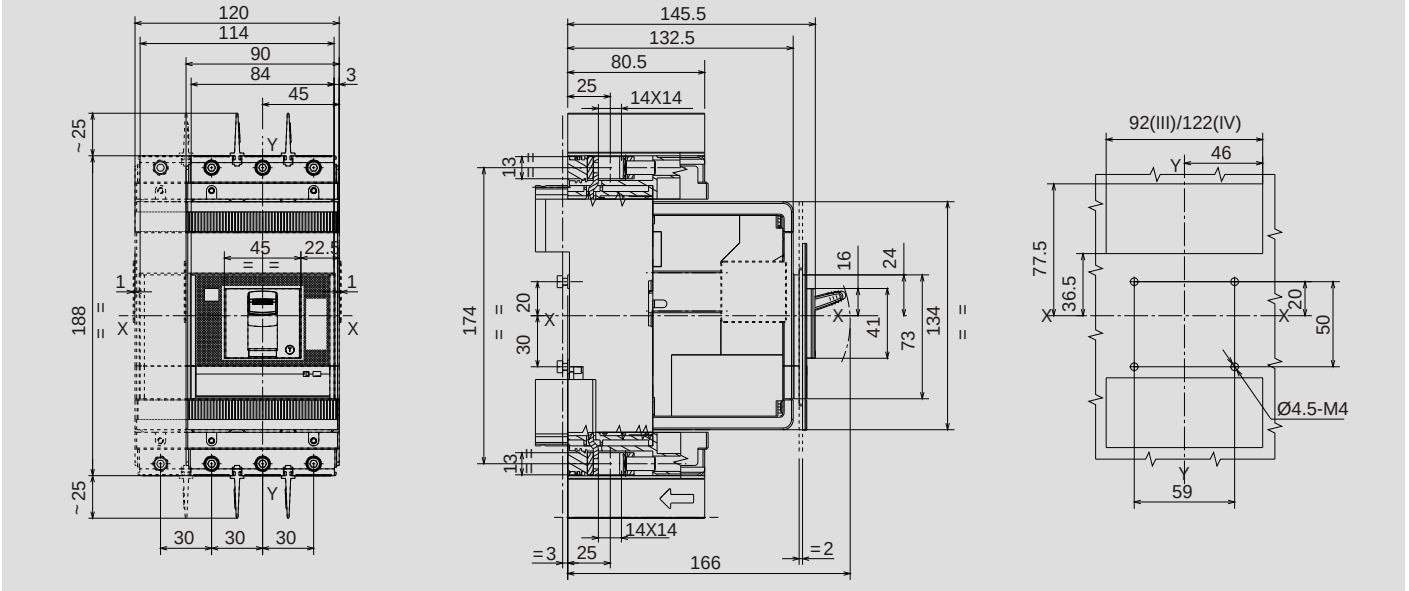



16

XT2-P/III-IV/Fc-Cu MC

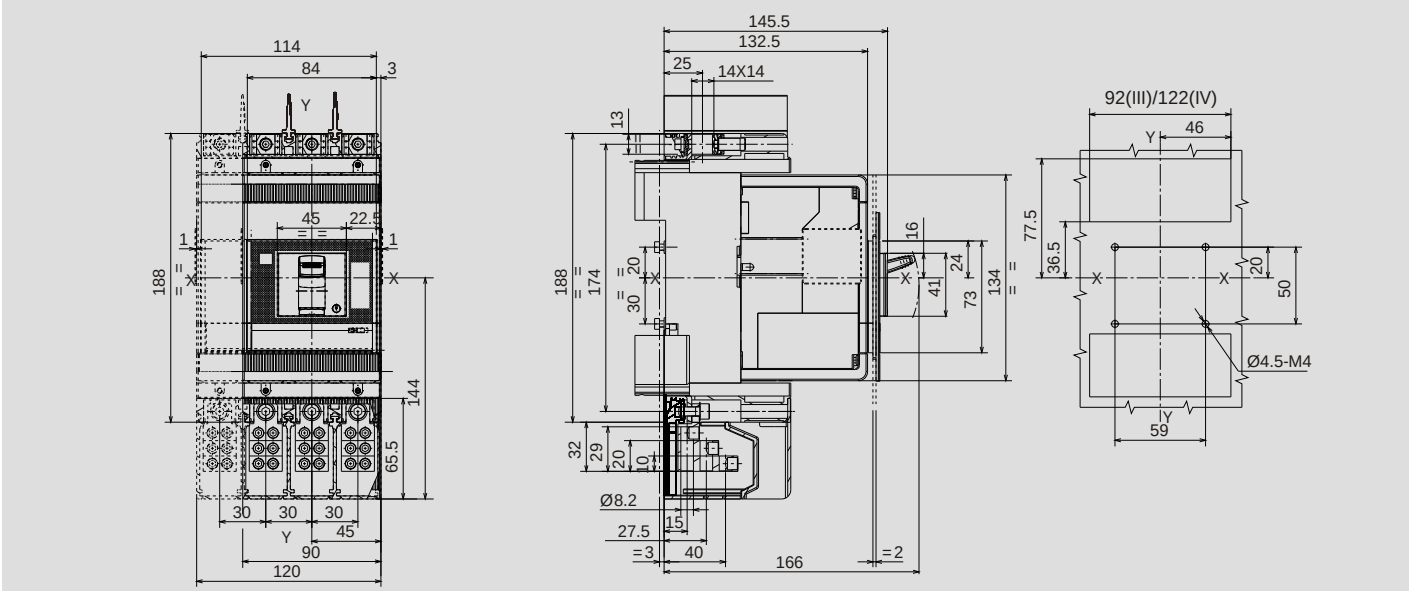

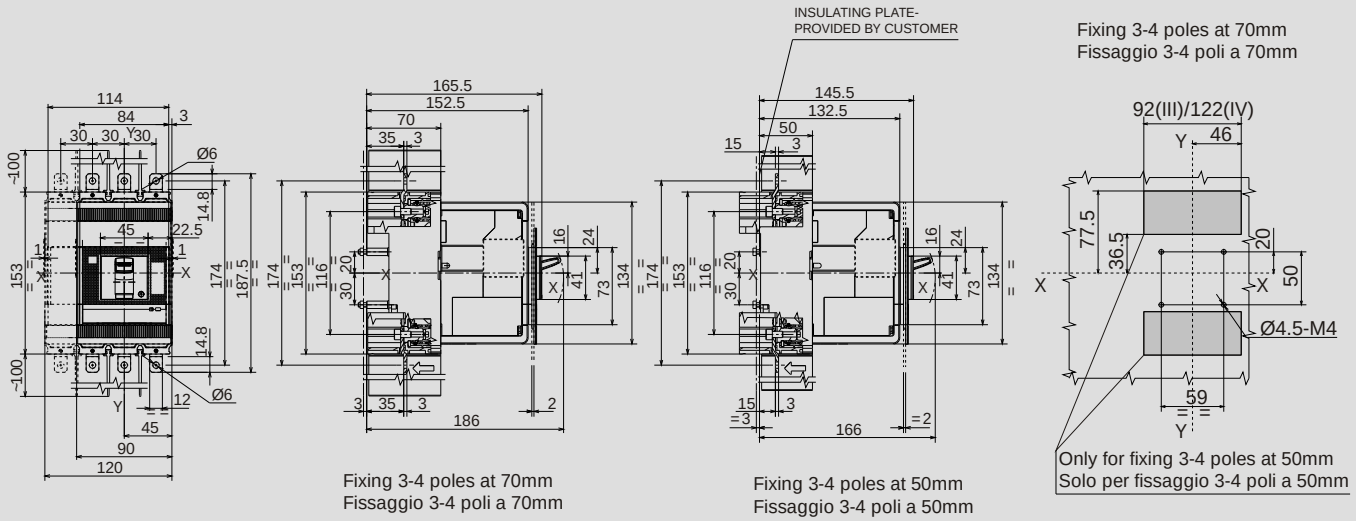

Fixing 3-4 poles at 70mm
Fissaggio 3-4 poli a 70mm
Fixing 3-4 poles at 50mm
Fissaggio 3-4 poli a 50mm
INSULATING PLATE-
PROVIDED BY CUSTOMER
Fixing 3-4 poles at 70mm
Fissaggio 3-4 poli a 70mm
92(III)/122(IV)
Ø4.5-M4
Only for fixing 3-4 poles at 50mm
Solo per fissaggio 3-4 poli a 50mm

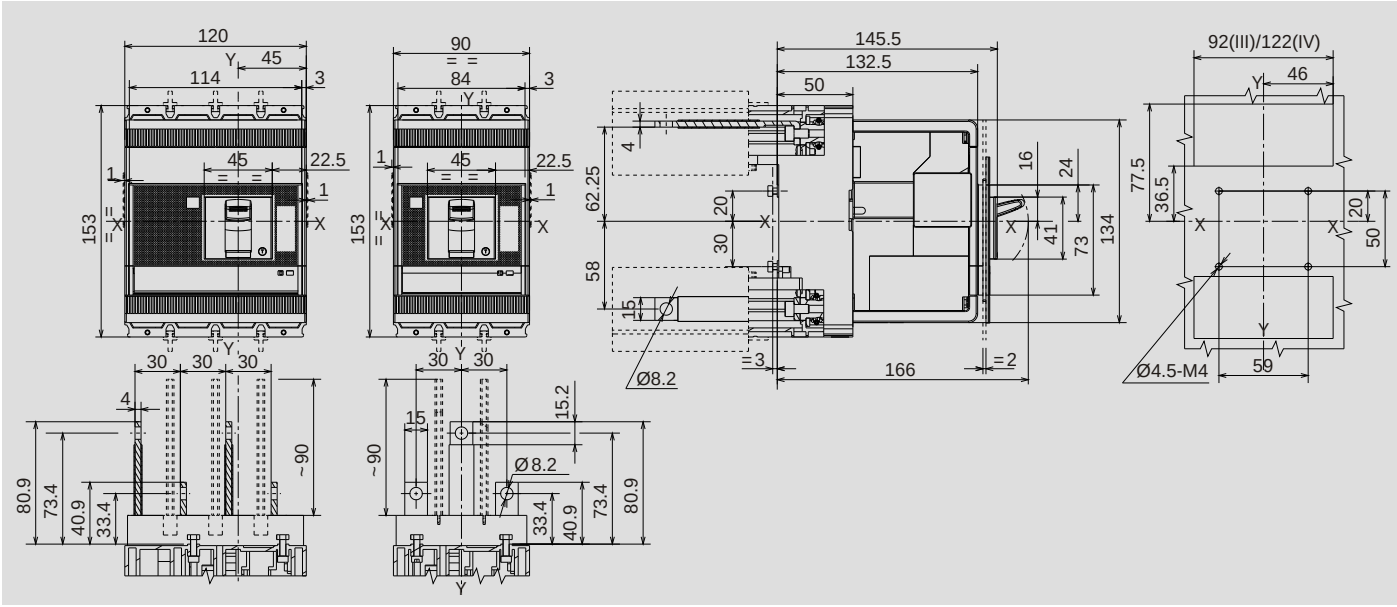
92(III)/122(IV)
Ø8.2
Ø4.5-M4

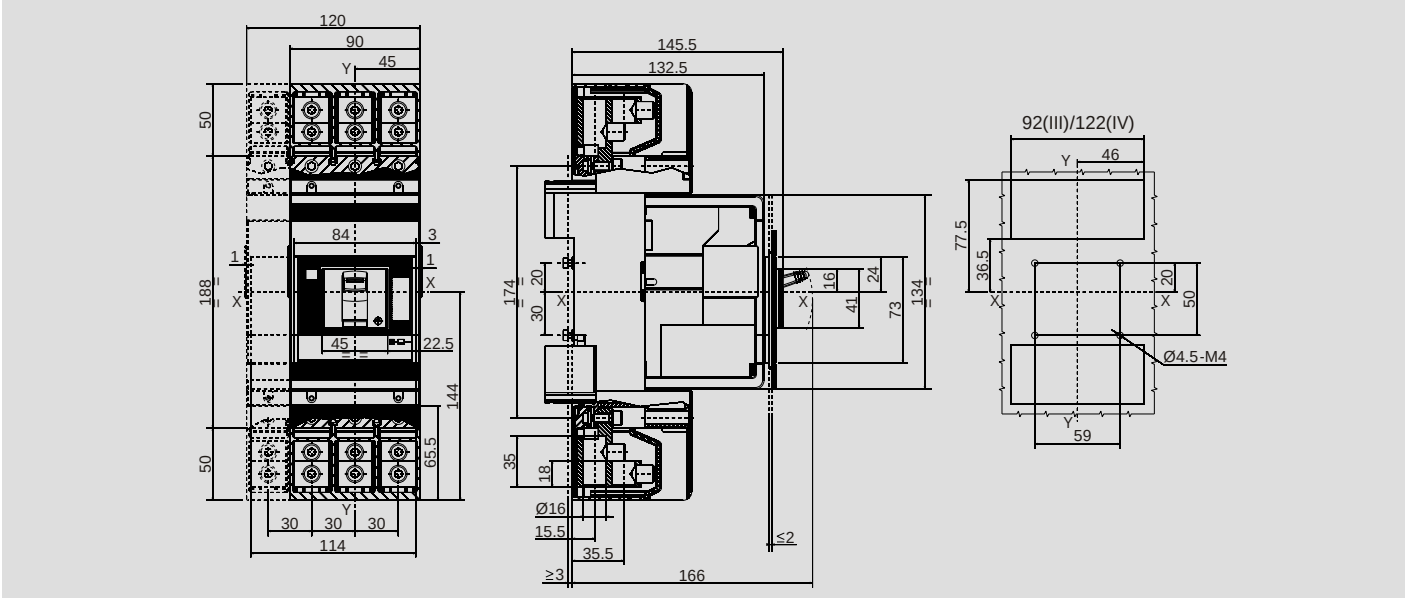
92(III)/122(IV)
Ø4.5-M4


20

XT2-P/III-IV/Fc Cu-Al EXT

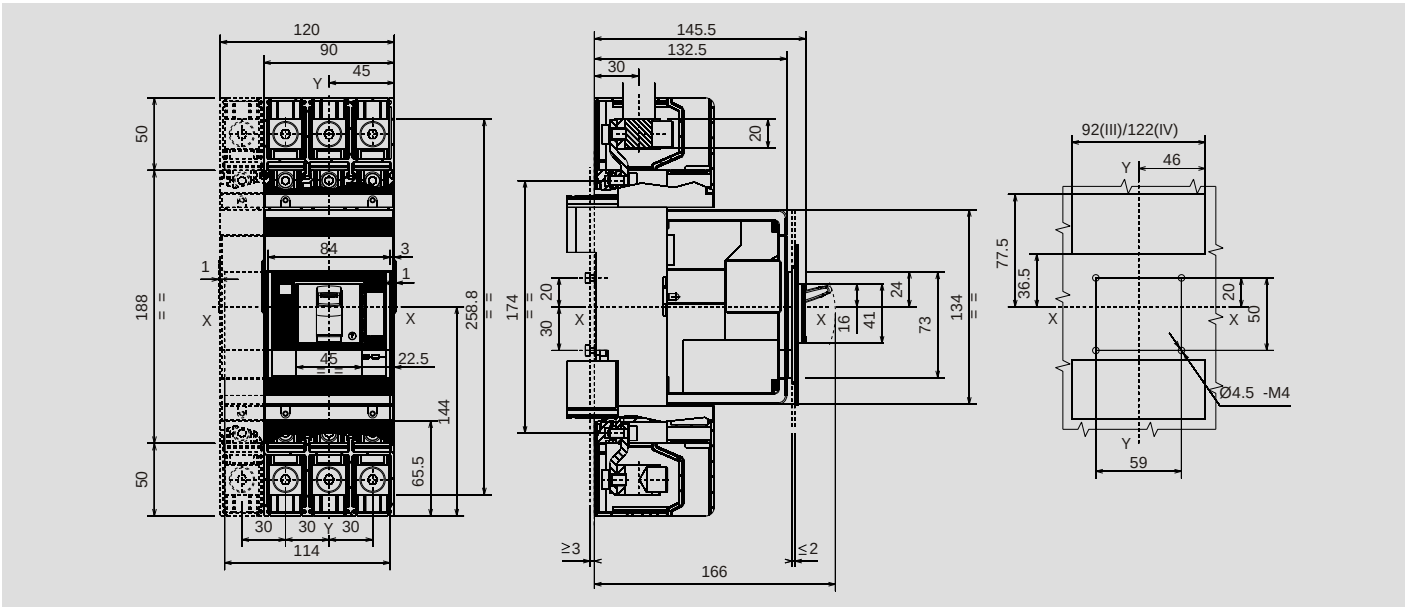


21

XT2-W/III-IV/ES

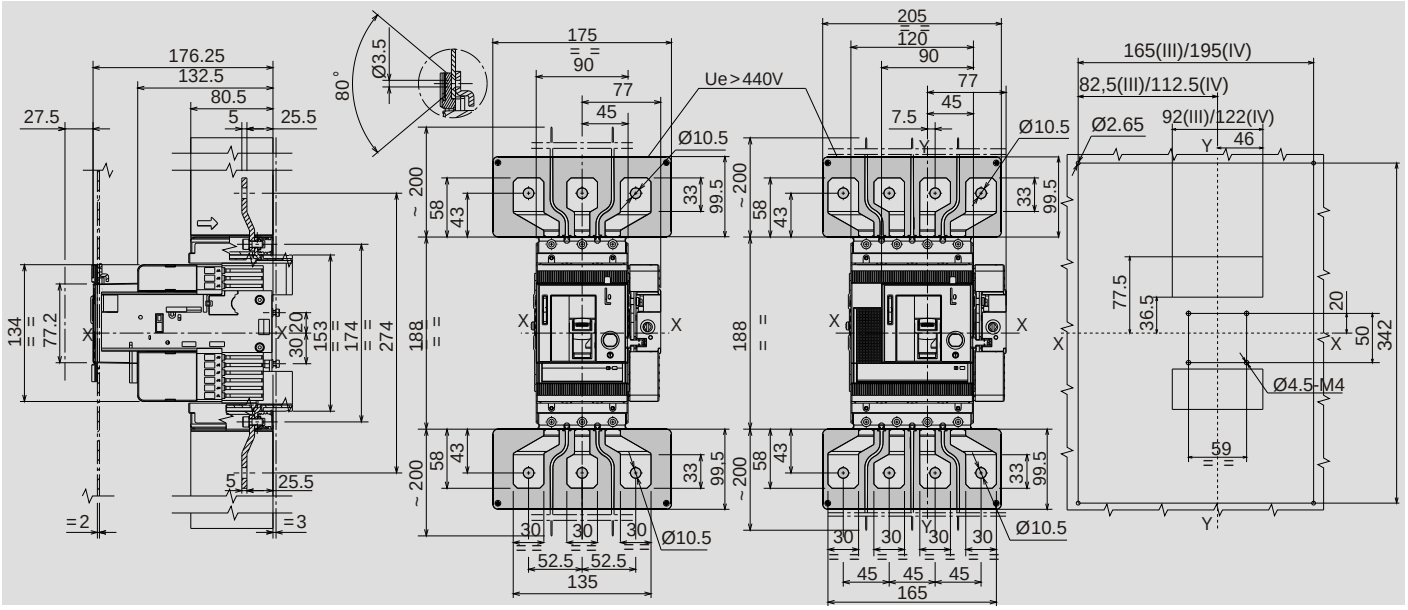


22

XT2-W/III-IV/Fc-Cu Al

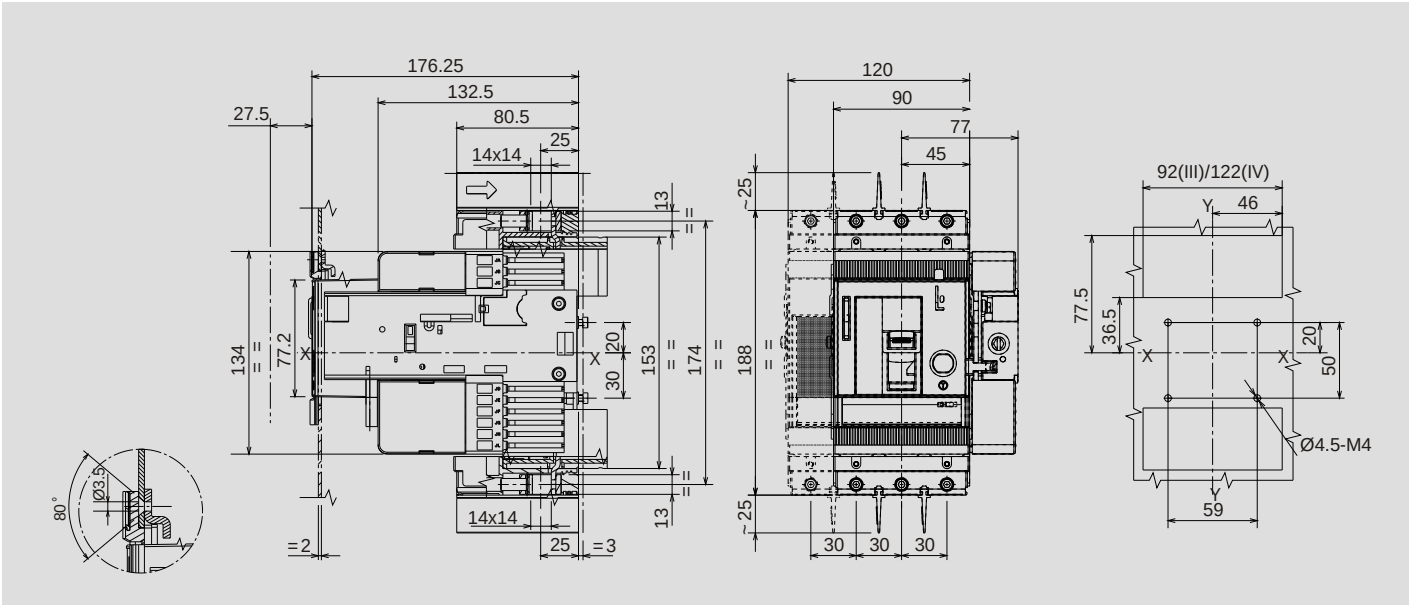


23

XT2-W/III-IV/Fc Cu-MC

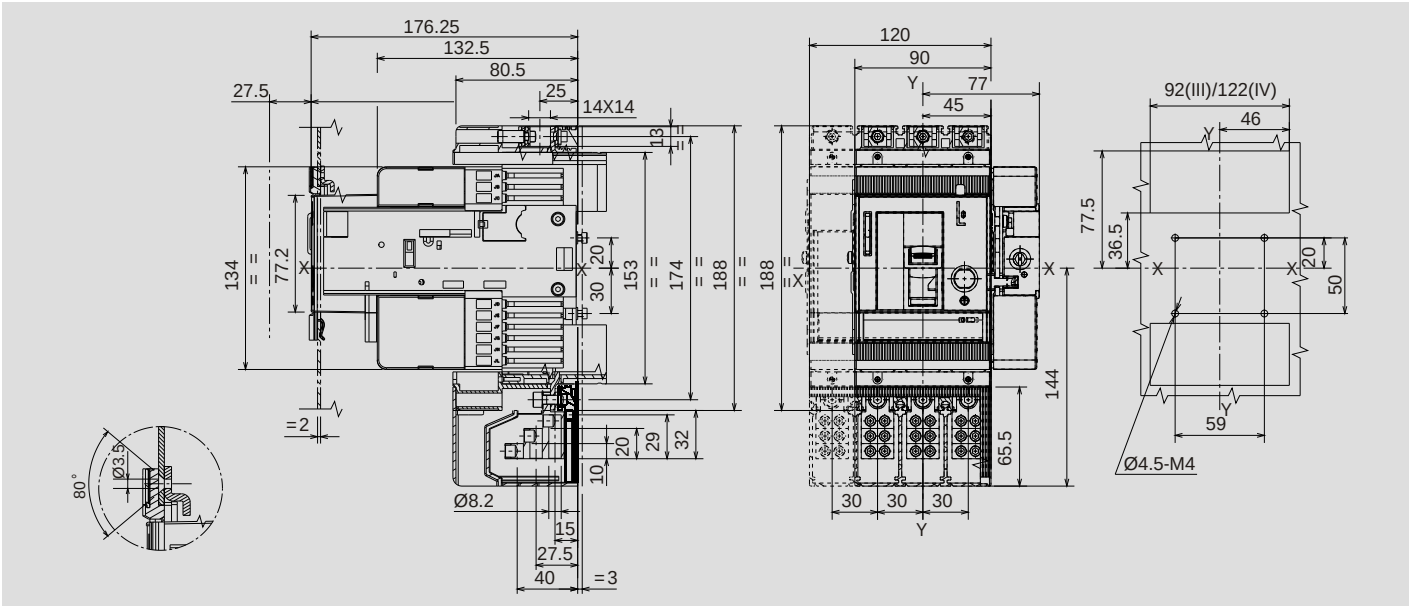


24


XT2-W/III-IV/EF

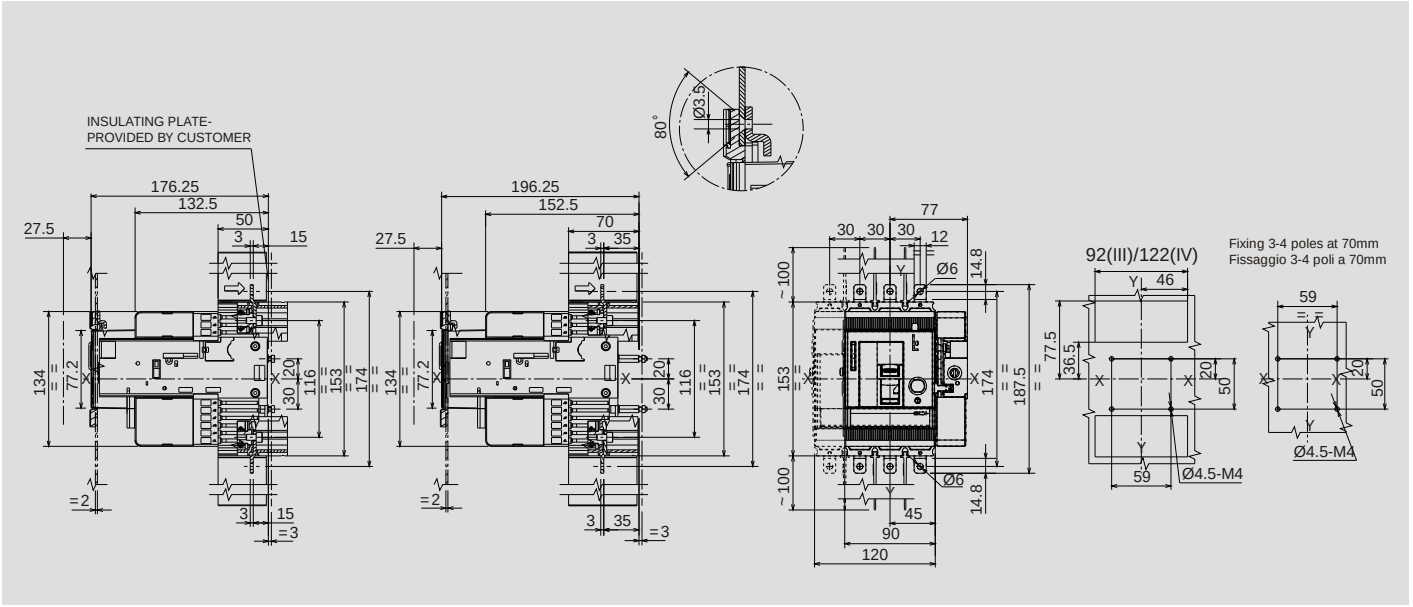



25

XT2-W/III-IV/HR-VR

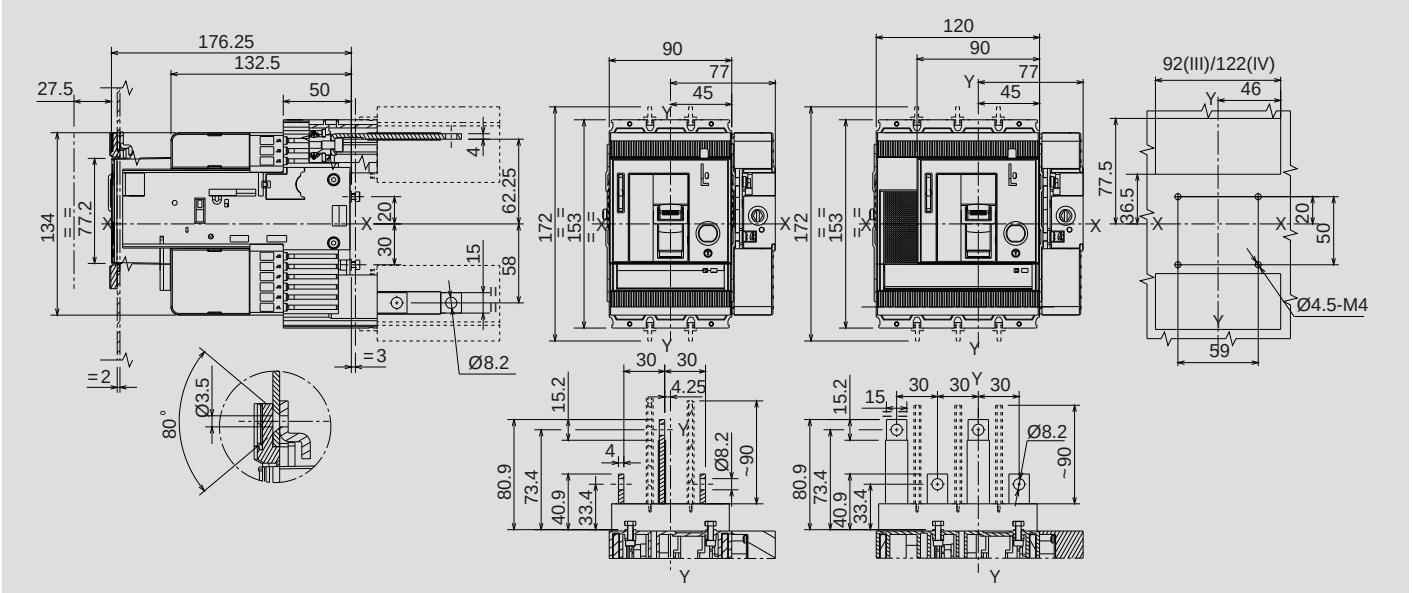


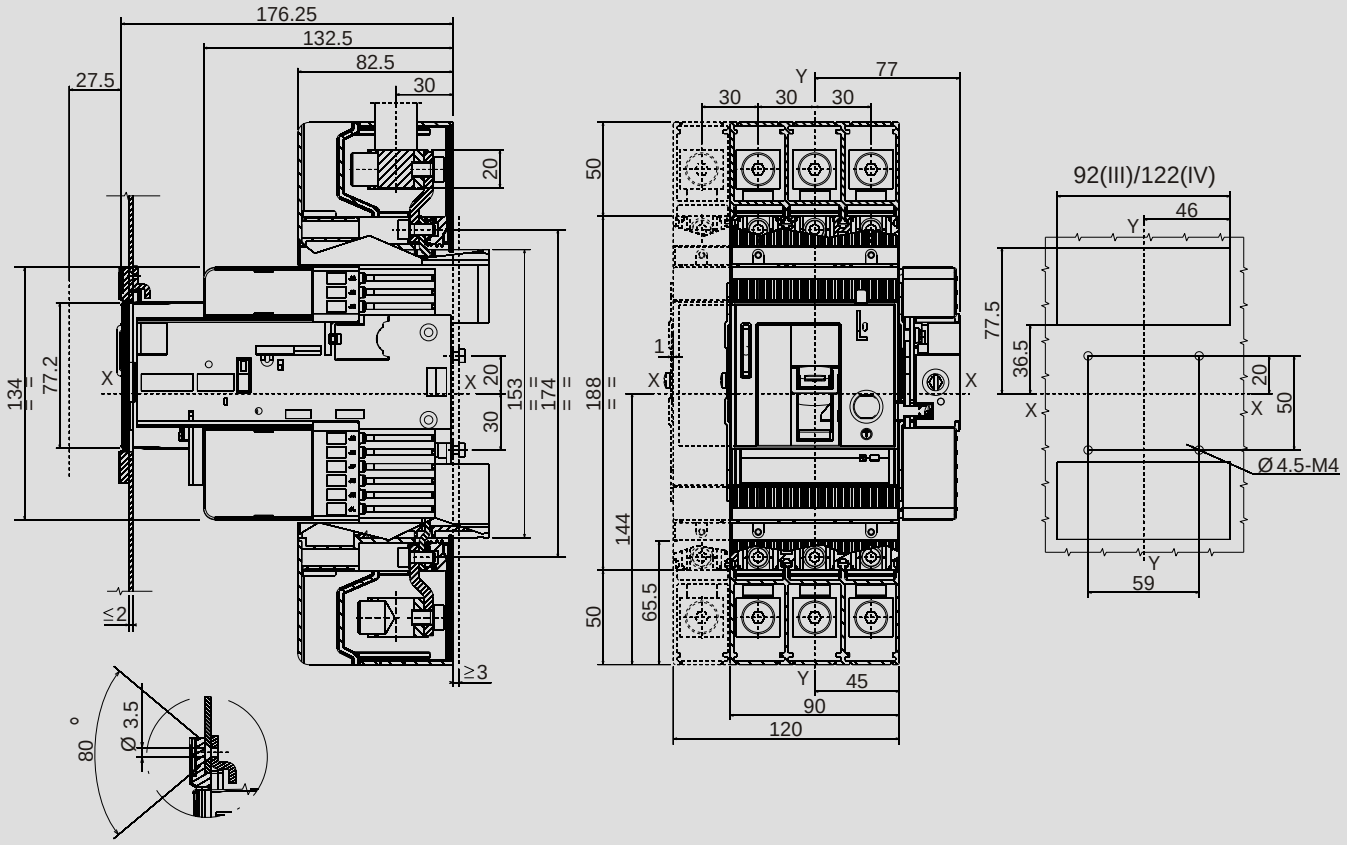
176.25
132.5
82.5
27.5
30
20
134
77.2
153
174
30
≤2
≥3
80°
Ø 3.5
77
30 30 30
50
188
144
65.5
45
90
120
92(III)/122(IV)
46
77.5
36.5
20
50
Ø 4.5-M4
59

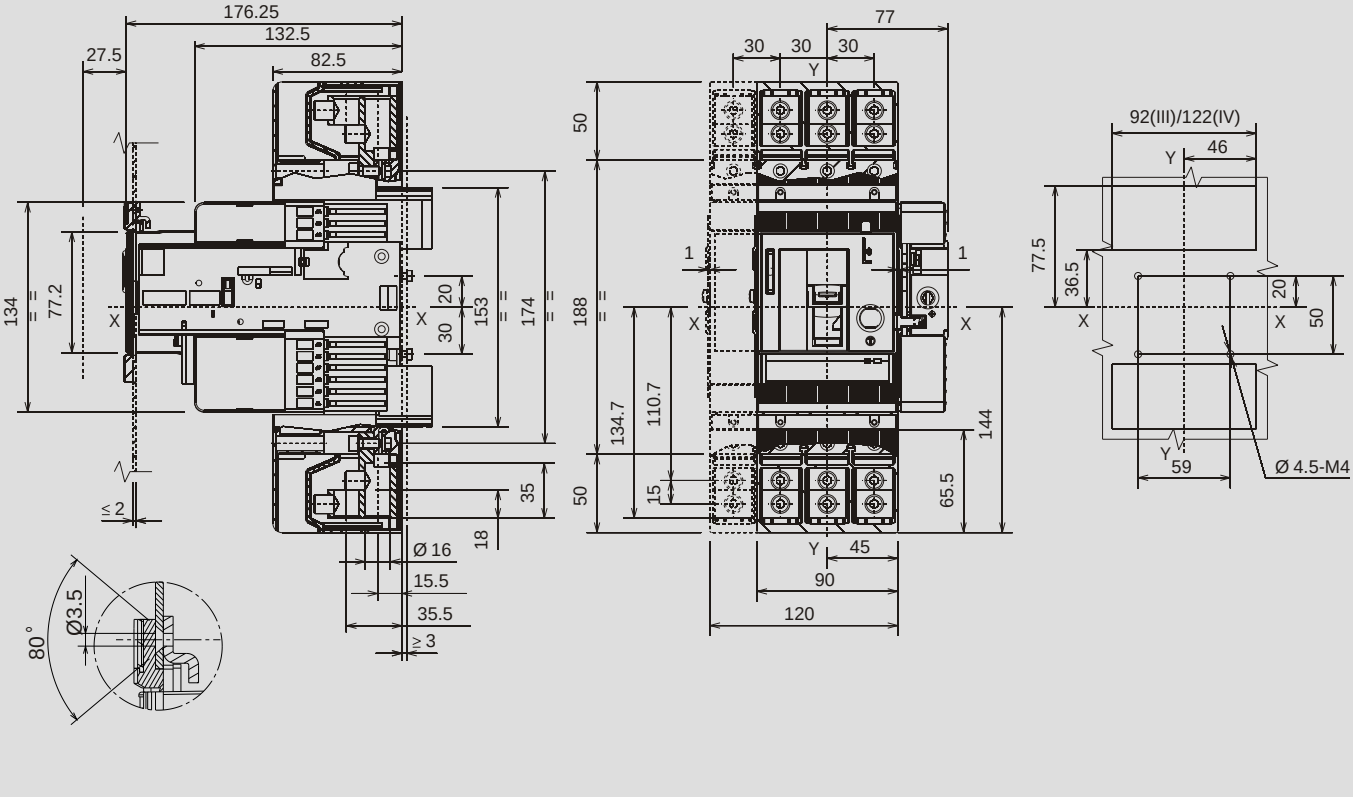

176.25
132.5
82.5
27.5
134
77.2
153
174
30
20
35
18
≤2
Ø 16
15.5
35.5
≥3
80°
Ø3.5
77
30 30 30
50
188
134.7
110.7
15
144
65.5
45
90
120
92(III)/122(IV)
46
77.5
36.5
20
50
Ø 4.5-M4
59

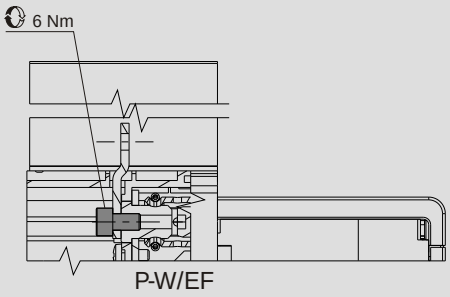


P-W/EF




P-W/ES

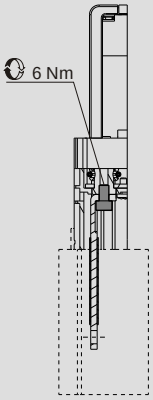


P-W/HR-VR




P-W/FC Cu




P-W/MC




P-W/EXT FC Cu Al





P-W/FC Cu Al



P-W/FC Cu Al 2x95mm²



		FC Cu		FC CuAl Internal		MC		FC CuAl Ext 2x95		FC CuAl Ext	
		MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
Stranded		95 mm²	2,5 mm²	95 mm²	2,5 mm²	35 mm²	2,5 mm²	95 mm²	35 mm²	185 mm²	70 mm²
Flexible		70 mm²	2,5 mm²	70 mm²	2,5 mm²	25 mm²	2,5 mm²				

For more information please contact:

ABB S.p.A.
ABB SACE Division
Via Baioni, 35
24123 Bergamo - Italy
Phone: +39 035 395 111
Fax: +39 035 395 306 - 433

www.abb.com

Power and productivity
for a better world™