


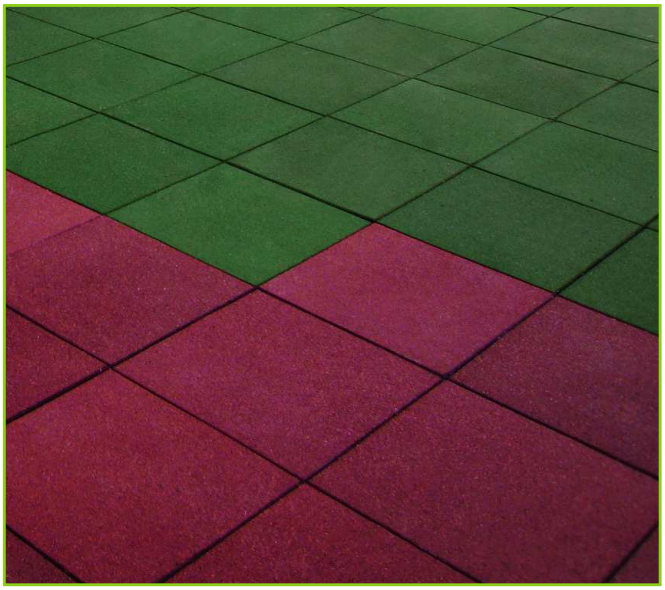


COLOCACIÓN ENCAJONADA / FLUSH INSTALLATION / POSE ENCAISSÉE:



COLOCACIÓN DIRECTA / DIRECT INSTALLATION / POSE DIRECTE:





Descripción/ m2 de baldosa de suelo amortiguador. Espesor 45mm.


Materiales y Características/


- Altura de caída de 1,46 m según EN1177.
- Granulado de caucho SBR con resina poliuretano y pigmento.
- Granulometrías 0,6-2mm / 2-4mm
- Dimensiones baldosa: 500x500x45 mm
- Peso 7 kg. / baldosa
- Disponibles baldosas en color rojo R4400RM o verde R4400VM.
- Banda perimetral de remate R4410.
- Recomendado para exteriores.

Description/ m2 Safety tiles, 45 mm thick.

Materials and characteristics/

- Free fall height of 1,46 m., following the EN1177 standards.
- Polyurethane and pigment resin granulated SBR rubber.
- Granulometry 0,6-2mm/2-4mm.
- The dimensions: 500x500x45
- Available colors: red R4400RM, green R4400VM.
- Available finishing perimetral border tile R4410.
- Recommended for outdoors.

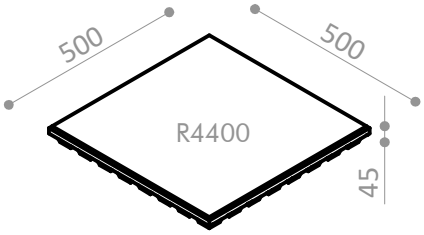

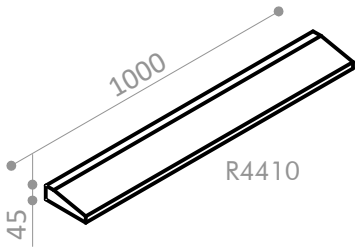

Industrias Agapito se reserva el derecho a modificar sin previo aviso los elementos descritos en este documento.
Industrias Agapito reserves the right to change the items described in this document without prior notice.
Industrias Agapito se réserve le droit de modifier à tout moment et sans préavis les éléments déscrits dans le présent document.

R4400

SUELO AMORTIGUADOR
SAFETY TILES
SOL AMORTISSANT











AGAPITO INDUSTRIAS
Pol. Ind. Valdeferrín Oeste, C/G, s/n 50600 Ejea (Zaragoza) España Tel: +34 976 660 879 Fax: +34 976 667 628
ventas@industriasagapito.com www.industriasagapito.com

TESTED EN-1177 PRODUCT