







1.17





ORION



Brida
Clamp
Collier



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

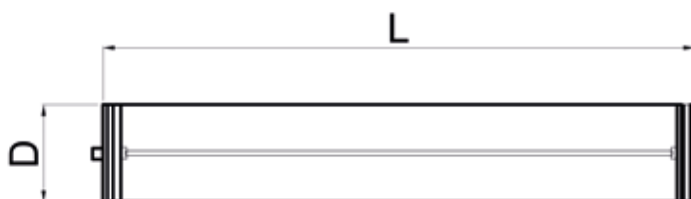

IT - DE



RG 0/1

MACADAM

3/4

UGR
<19

CR>80


L70B50
>
50.000

IP67

IK09

CE

EN 60598-1



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OR113	600	13	1490	1040	3000	770	81	113	1
OR114	600	13	1550	1082	4000	770	81	113	1
OR123	600	16	2560	1787	3000	770	81	113	1
OR124	600	16	2670	1864	4000	770	81	113	1
OR213	1200	24	2980	2080	3000	1380	81	113	1
OR214	1200	24	3200	2234	4000	1380	81	113	1
OR223	1200	32	5120	3574	3000	1380	81	113	1
OR224	1200	32	5340	3727	4000	1380	81	113	1
OR313	1500	29	3720	2597	3000	1633	81	113	1
OR314	1500	29	4000	2792	4000	1633	81	113	1
OR323	1500	40	6310	4404	3000	1633	81	113	1
OR324	1500	40	6700	4677	4000	1633	81	113	1


1.17

ORION

BAJAS TEMPERATURAS LOW TEMPERATURES BASSES TEMPÉRATURES



Brida
Clamp
Collier



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	Largo Length Longueur	Ancho Wide Large	Ancho con brida Width with clamp Largeur avec fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OC123	600	32	4300	3000	3000	770	81	113	1
OC124	600	32	4600	3200	4000	770	81	113	1
OC223	1200	64	8600	6000	3000	1380	81	113	1
OC224	1200	64	9000	6300	4000	1380	81	113	1
OC323	1500	80	10750	7500	3000	1633	81	113	1
OC324	1500	80	11400	8000	4000	1633	81	113	1

ACCESORIOS ORION / ORION ACCESSORIES / ACCESSOIRES ORION



Ref.

Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Q0347

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Q0348

Bridas de acero inoxidable de apertura
rápida
Quick opening stainless steel clamps
Colliers inox de ouverture rapide à grenouillère



Ref.

Q0339

Tapas metálicas y racor metálico
Metallic end caps and cable glands
Embouts et presse-étoupes métalliques



Q0147

Pieza anticavitación
Anticavitation piece
Kit anti-cavitation

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles





























































Ref. Q0578

5 polos / 5 poles / 5 pôles

Ref. Q0579

1-10
DALI

EMERGENCY
1h / 3h

	Cuerpo luminaria tubo policarbonato Polycarbonate luminaire body Corps du luminaire tube polycarbonate		Cuerpo extrusion Aluminum body Corps aluminium		Rango de temperaturas Temperatures range Tranche de temperatures
	Cuerpo luminaria metacrilato Methacrylate luminaire body Corps du luminaire méthacrylate		Cuerpo Acero Prelacado Pre-lacquered steel body Corps en acier prélaqué		Ensayo hilo Glow wire test Essais fil incandescent
	Cuerpo luminaria vidrio borosilicato Glass borosilicate luminaire body Corps du luminaire verre borosilicate		Cuerpo Aluminio Prelacado Pre-lacquered aluminum body Corps en aluminium prélaqué		Alto factor High Factor Hautes temperatures
	Cuerpo luminaria ABS ABS luminaire body Corps du luminaire ABS		Cuerpo ABS ABS body Corp ABS		Conector rápido Quick Connector Connecteur rapide
	Cuerpo luminaria poliestireno Polystyrene luminaire body Corps du luminaire polystyrène		Difusor Policarbonato Polycarbonate Diffuser Diffuseur Polycarbonate		Entrada cablesosca M25 (2e) M25 Cable entry (2e) Entrée de câbles a vis M25 (2e)
	Cuerpo aluminio Extrusion Aluminum Body Corps extrusion aluminium		Difusor Policarbonato Opal Opal Polycarbonate Diffuser Diffuseur Polycarbonate Opal		Regulación de flujo Dimmable equipment Ballast gradable
	Cuerpo hierro Iron body Corps fer		Difusor Poliestireno Polystyrene Diffuser Diffuseur Polystyrène		Módulo LED LED Module Modules LED
	Tapas Aluminio pintado Painted Aluminum end caps Embouts aluminium peint		Difusor PC/ACRIL PC/ACRIL Diffuser Diffuseur PC/ACRIL		Tubo LED LED Tube Tube LED
	Tapa acero INOX Stainless Steel 304 end caps Embouts INOX 304		Lamas ABS ABS louvers Lames ABS		Tubo fluorescencia Fluorescent Tube Tube Fluorescent
	Tapa acero INOX Stainless Steel 316 end caps		Lamas ABS - PC ABS - PC Louvers Lames ABS - PC		Tubo LED o Tubo fluorescente LED Tube or fluorescent tube Tube LED ou Tube fluorescent
	Tapas ABS ABS Plastic end caps Embouts PLASTIQUE ABS		Abrazaderas acero cincado Galvanized Steel Clamps Fixations acier zingué		Fuente de luz Light source Source de lumière
	Tapas Policarbonato PC Plastic end caps Embouts PLASTIQUE PC		Brazaderas acero inox Stainless Steel Clamps Fixations INOX		Fuente de luz Light source Source de lumière
	Tapas Plástico Metalizado Metalized Plastic end caps Embouts PLASTIQUE CHROMÉ		Abrazaderas cierre rápido Quick opening stainless steel Fixations INOX ouverture à grenouillère		Fuente de luz Light source Source de lumière
	Tapas Zamak Niquelado Nickel-plated ZAMAK end caps Embouts ZAMAK NICKELÉ		Abrazaderas PC antivandálica Vandalism PC Clamps Fixations INOX ouverture à grenouillère		Zona ATEX EX Area ATEX Zone
	Tapas acero niquelado Nickel-plated steel end caps Embouts Acier Nickelé		Abrazaderas ABS ABS Clamps Fixations PMMA antivandalismo		Sistema de emergencia Emergency Sistem Système d'urgence
	Aluminio Anodizado Anodized aluminum Aluminium anodisé		Aro ABS ABS Ring Fixations ABS		Grupo de riesgo fotobiológico Photobiological risk group Group de risque photobiologique
	Reflector Aluminio brillo Reflector Aluminum Gloss Réflecteur Aluminium brillant		Abrazaderas techo o pared Ceiling or wall Clamps Fixations murs et parois		Índice MacAdam MacAdam Ellipse Taux MacAdam
	Reflector chapa lacada blanca White lacquered steel Reflector Réflecteur tôle lacquée blanc		Prensaestopa Cable Gland Presse étoupes		Índice de deslumbramiento unificado Unify glare rating Taux d'éblouissement
	Reflector acero lacado blanco White Lacquered Steel Reflector Réflecteur acier lacqué blanc		Empotrable para lámpara Embedded for lamps Encastrable pour lamp		Índice cromático Chromatic Index Taux chromatique
	Reflector acero galvanizado Galvanized Steel Reflector Réflecteur acier galvanisé		Brida suspensión perforación 18mm Clamps suspension borehole 18 mm Fixation avec suspension perforation 18 mm		Vida útil Useful life Durée de vie