Ex9TAM2

1



Analogue time switches
Analogové časové spínače
Analógové časové spínače
Analogowe zegary sterownicze
Programatoare de timp analogice
Analoge Zeitschalter
Interrupteurs horaires analogiques
Аналоговые таймеры
Инсталационни аналогови таймери
Analogni časovni releji
Analóg időkapcsolók
Аналогові таймери
Interruptor temporizador mecánico
Analogni tajmeri
Interruttori orari analogici

Ex9TAM2

2

Mounting instruction
Montážní návod
Montážny návod
Instrukcja montażu
Instructiuni de asamblare
Montageanweisung
Instructions de montage
Инструкция по монтажу
Инструкции за инсталиране
Uputstvo za montažu
Összeszerelési útmutató
Montavimo instrukcijos
Інструкція з монтажу
Istruzioni di montaggio
Instrucciones de montaje
Instalēšanas instrukcijas
Paigaldusjuhendid
Montažu upute
Οδηγίες Εγκατάστασης
Monteringsanvisning
Asennusohjeita
Montage-instructies
Instruções de montagem
Navodila za montažo
Monteringsvejledningen


Ex9TAM2

3

Caution: Installation by electricians only
Varování: Montáž pouze osobou s elektrotechnickou kvalifikací
Uwaga: Montaż tylko przez uprawnionych instalatorów
Atentie: Instalare numai de catre electricieni
Varovanie: Montáž smie vykonávať iba osoba s elektrotechnickou kvalifikáciou
Vorsicht: Montage nur durch Elektrofachkräfte
Attention: Montage uniquement par un électricien
Осторожно: Установка данного оборудования производится только специалистом – электриком
Внимание: Монтаж само от ел.специалисти
Upozorenje: Montažu izvodi samo stručno lice
Figyelem: Szerelést kizárólag szakember végezheti
Dėmesio: montavimo darbus gali atlikti tik kvalifikuotas specialistas-elektrikas
Обережно: монтаж виконує виключно електрик
Atención: Este dispositivo debe ser manipulado únicamente por personal cualificado


Ex9TAM2

4




Ex9TAM2


5

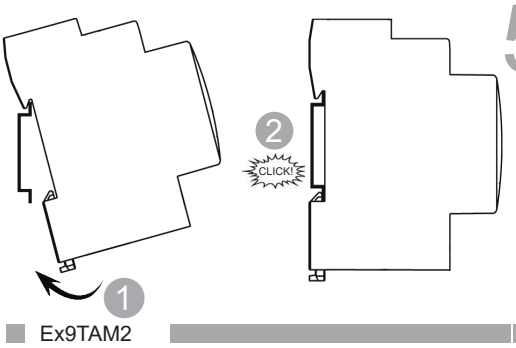

Ex9TAM2

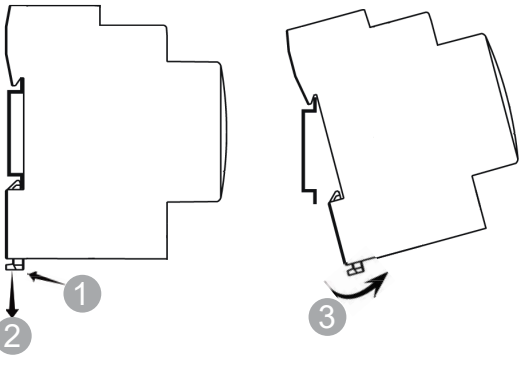


6



220 - 240V~
45 / 60Hz

16(4)A 250V~

7

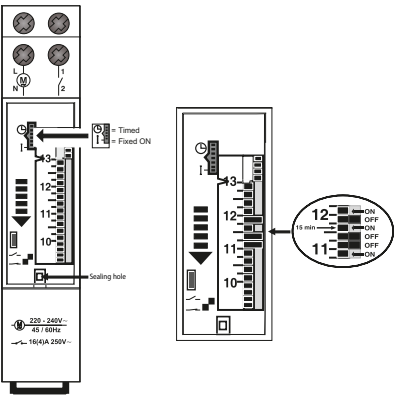

8

Technical data

	Daily without reserve	Daily with reserve
Supply voltage	230V~ 45÷60 Hz	
Max. load on changeover contact	16 (4) A / 250V~	
Type of output	1 NO contact, voltage-free	
Inductive load	1000 VA	
Resistive load	3500 W	
Setting	Daily	
Shortest switching time	15 minutes	
Max. number of programs	96	
Board selector	=Timed ON/OFF | = Fix ON	
Rated impulse voltage	4 kV	
Type of protection	IP20	
Type of insulation	II Class	
Running reserve	-	100 h
Type battery	-	Ni-MH(cadmium free)
Connection diameter	1.5 mm² - 4 mm²	
Surrounding temperature	-10°C - +50°C	
Pollution degree	2	
Sealable	Yes	
Mounting	onto 35 mm device rail (DIN)	
Reference standart for CE mark	LVD/EMC, EN 60730-1, EN 60730-2-7	

NOARK

Printed with environment-friendly paper
Copyright Noark. All Right Reserved
NOARK Electric Europe s.r.o.
Sezemická 2757/2, 193 00 Praha 9, Czech Republic
www.noark-electric.eu
20201201