

Minimum distances

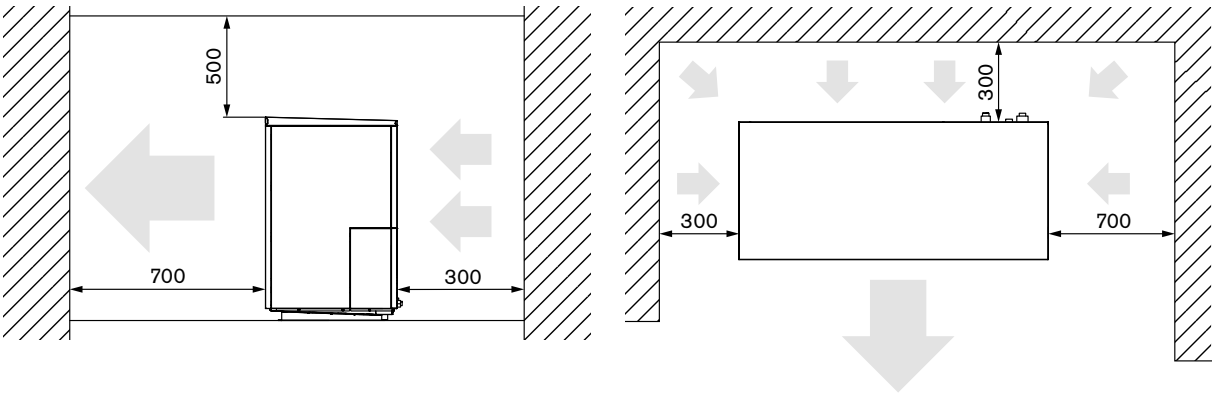

Condensate connection AirPro

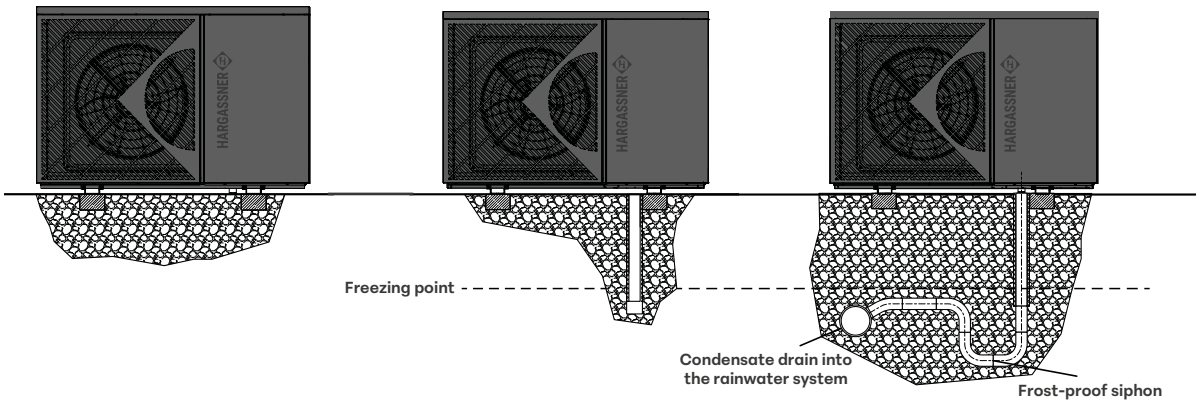

Outdoor unit	Unit	AP 207	AP 310	AP 515	AP 620
Modulation range	kW	2 - 7	3 - 10	5 - 15	6 - 20
Heating output at A-7/W35	kW	5,42	8,55	12,91	16,15
Heating output at A-10/W35	kW	4,90	7,77	11,86	14,94
Operating range (heating)	°C	-28 to +42			
Operating range (cooling)	°C	12 to 45		15 to 45	
Max. flow temperature	°C	75			
Refrigerant		R290			
Dimensions (H x W x D)	mm	1015 x 1505 x 715	1115 x 1605 x 715	1370 x 1705 x 905	1475 x 1955 x 905
Weight	kg	241	230 V: 266 400 V: 276	350	401
Hydraulic connection		1 1/4", External thread flat sealing			
Condensate connection	mm	40			
Supply voltage	V/Hz	230 / 50	400 / 50		

Indoor unit	Unit	Basic	Style	Comfort
Dimensions (H x W x D)	mm	450 x 315 x 132	770 x 640 x 400	1770 x 695 x 878
Weight	kg	8,2	40	255
Hot-water storage tank	l	-	-	310
Hydraulic connection		-	1", External thread flat sealing	
Supply voltage control unit	V/Hz	230 / 50		
Supply voltage heating element	V/Hz	-	400 / 50	
Heating element output	kW	-	3, 6, 9	

Actual values may vary. Subject to misprints and technical modifications.