Soporte SHE para pared o perfil “C”

SHE Horizontal support for wall or “C” profile

REVISION: **07**

Fam.: **MAS**

INTERFLEX, S.L. c/Muga 1, Pol. Ind. Pla d’en Coll, Montcada i Reixac E-08110 · Tel: +34 935643112 · Fax: +34 935643700 · interflex@interflex.es · www.interflex.es

DESCRIPCIÓN

- Soporte para la fijación a pared o perfil “C”
- Para la fijación sobre perfil “C”, utilizar 2 tornillos TE1020G con tuercas-guía TG10G
- Para sujeción con varilla roscada M10, usar una medida de soporte superior a la de la bandeja. Por ejemplo, para una bandeja de ancho 200 mm, usar SHE30S.
- Acabados:
  - **S** Acero laminado galvanizado tipo sendzimir DX51D +Z275 MAC s/ UNE-EN 10346 con una masa de recubrimiento de 275 g/m² de cinc (conjunto de ambas caras) equivalente a 20 µm por cara.
  - **G** Galvanizado por inmersión en baño de cinc a 450-460ºC de acuerdo con la norma UNE-EN ISO 1461. Promedio mínimo 45 µm.
  - **E** Pintura epoxi en base a resina poliéster, espesor 80 µm
  - **HR** Acero cubierto de aleación de zinc, aluminio y magnesio de alta resistencia a la corrosión
- Aplicaciones:
  - **S** en instalaciones de interior en atmósferas secas y sin contaminantes agresivos
  - **G, E y HR** en instalaciones exteriores industriales, rurales y marinas e interiores agresivas.

DESCRIPTION

- Horizontal support for wall or “C” profile
- When fixing it to a “C” profile, use 2 TE1020G bolts with TG10G guided-locknuts.
- To fix it with a M10 threaded hanging rod, use a longer reference than the cable tray width, i.e. for a cable tray width of 200 mm, use SHE30S.
- Finishes:
  - **S** Laminated galvanized steel sendzimir type DX51D +Z275 MAC according to EN 10346 with a cover of zinc of 275 g/m² (both faces) equivalent to 20 µm in each face.
  - **G** Hot Dip Galvanized in a zinc bath at a temperature of 450-460ºC, according to EN ISO 1461 standard. Minimum average 45µm.
  - **E** Epoxi paint based on polyester resins with a 80 µm thickness
  - **HR** Zinc, aluminium and magnesium alloy coated steel with high resistance to corrosion
- Uses:
  - **S** in dry and indoor environments, without aggressive pollutants.
  - **G, E and HR** in outdoor industrial, rural, marine and aggressive environments

CARACTERÍSTICAS DIMENSIONALES / *DIMENSIONAL CHARACTERISTICS*


Referencia / *Reference*				Ancho bandeja / *Cable tray width* mm.	Largo / *Length mm*	Embalaje / *Packing* u	Carga máxima admisible / *Maximum admissible load* (N)
S	G	E	HR				
SHE10S	**SHE10G**	**SHE10E**	**SHE10HR**	100	120	10	420
SHE15S	**SHE15G**	**SHE15E**	**SHE15HR**	150	170	10	630
SHE20S	**SHE20G**	**SHE20E**	**SHE20HR**	200	220	10	1000
SHE30S	**SHE30G**	**SHE30E**	**SHE30HR**	300	320	10	1500
SHE40S	**SHE40G**	**SHE40E**	**SHE40HR**	400	420	5	1900
SHE50S	**SHE50G**	**SHE50E**	**SHE50HR**	500	520	5	2300
SHE60S	**SHE60G**	**SHE60E**	**SHE60HR**	600	620	5	2400

Dimensiones en mm. / Dimensions in mm.


APLICACIONES *USES*

	Clasificación según / *Classification according to* UNE-EN 61537	Interior / *Indoors* normal	Interior húmedo / *Indoors humid*	Exterior / *Outdoors* normal	Marino / *Marine*	Industrial (SO_2)	Ambiente ácido / *Acid environm.*	Ambiente alcalino / *Alcaline environm.*	Alimentario / *Food industry*
S	3	ok	no	no	no	no	no	no	no
G	5	ok	ok	ok	ok	no	no	ok	no
E / HR	8	ok	ok	ok	ok	ok	ok	ok	no


SHE10_

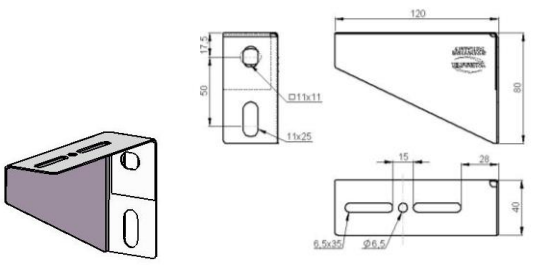

SHE15_

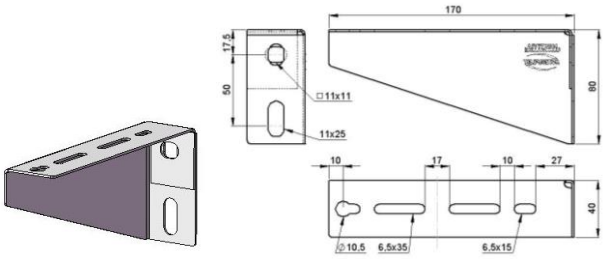

SHE20_

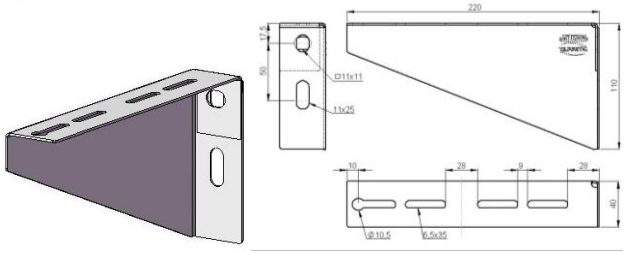


Certificaciones / *Certifications*	
CE	CE
UK CA	UK CA
RoHS Compliant	RoHS compliant


INTERFLEX	**Soporte SHE para pared o perfil "C"**	REVISION: **07**
		Fam.: **MAS**
	SHE Horizontal support for wall or "C" profile	Pág. / *Page* **2/2**

INTERFLEX, S.L. c/Muga 1, Pol. Ind. Pla d'en Coll, Montcada i Reixac E-08110 · Tel: +34 935643112 · Fax: +34 935643700 · interflex@interflex.es · www.interflex.es


SHE30_

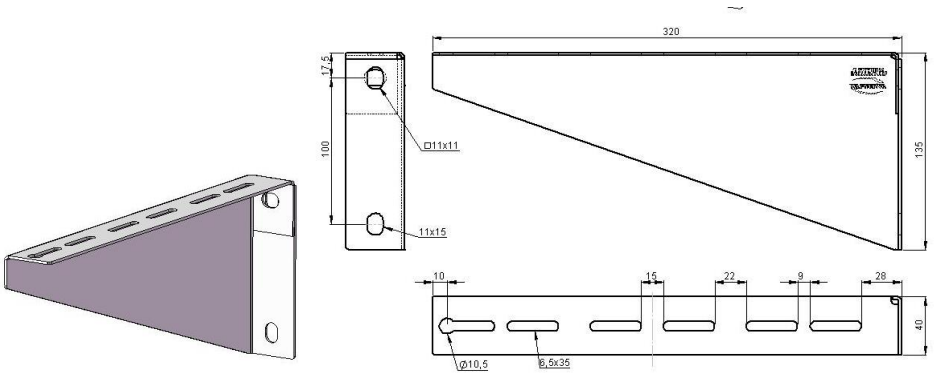


SHE40_

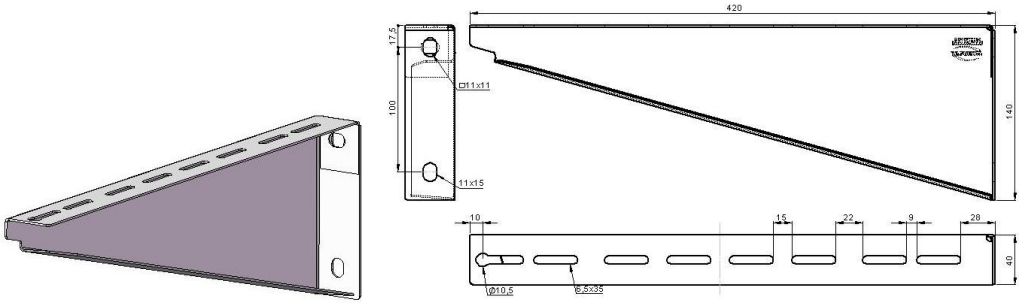

SHE50_

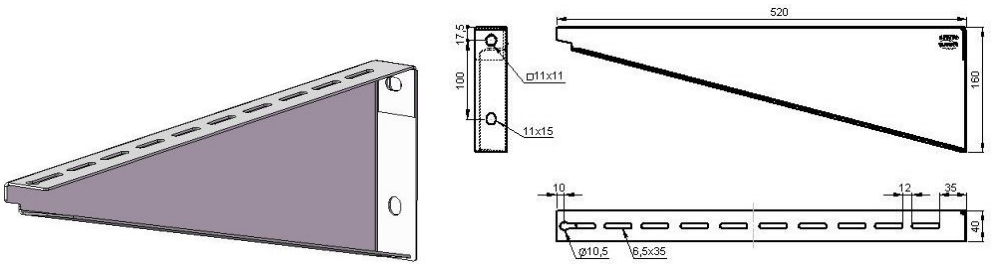

SHE60_

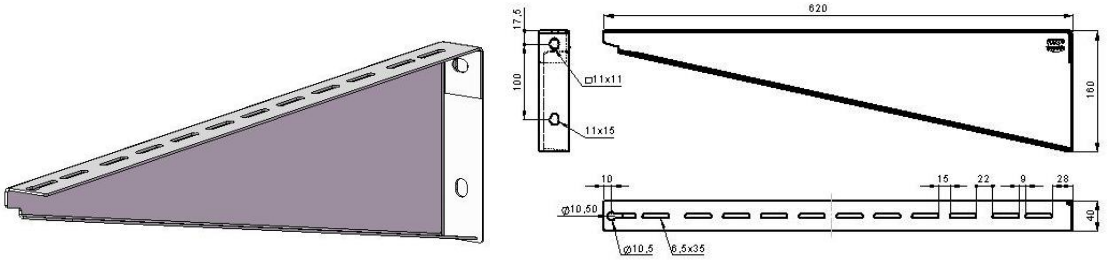

La información contenida en esta Especificación Técnica de Producto se considera correcta en el momento de su publicación. Sin embargo, puede ser modificada sin previo aviso. El usuario deberá efectuar la selección adecuada del producto y la preparación necesaria para unas condiciones seguras en su aplicación. Es responsabilidad del usuario comprobar los productos recibidos y notificar inmediatamente a INTERFLEX, S.L. cualquier defecto. INTERFLEX, S.L. no será responsable de cualquier daño resultante de una mala instalación, aplicación o uso de sus productos. Si los productos de INTERFLEX, S.L. son utilizados conjuntamente con productos que no son de INTERFLEX, S.L., cualquier reclamación sobre el material en su conjunto será desestimada. Visite nuestra página web *www.interflex.es* para tener información actualizada.

The information provided in this Technical Data Sheet is considered to be true and correct at the time of publication. However, it may be changed without prior notice. It is the customer's obligation to determine the correct and safe selection, settings and conditions of use of the products. It is the customer's responsibility to check the delivered products and immediately notify INTERFLEX, S.L. of any detected fault. INTERFLEX, S.L. cannot be held responsible for any damage resulting from unprofessional installation, application or misuse of its products. If INTERFLEX, S.L. products are used in conjunction with non INTERFLEX, S.L. products, all product liability claims will be rejected. Visit our webpage www.interflex.es *for an updated information.*