PRODUCT DATASHEET
DL IP44 FRAME DN 165 WT

DOWNLIGHT IP44 FRAME | Surface mounting frame for Downlight IP44



Areas of application

- Direct replacement for luminaires with compact fluorescent lamps
- General illumination
- Public areas
- Stairways
- Corridors
- Shops
- Bathrooms

Product benefits

- Easily installed

Product features

- Robust polycarbonate casing
- Mounting accessories included




© 2022, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Dimensions & Weight

Diameter	165 mm
Height	47 mm
Product weight	96.00 g

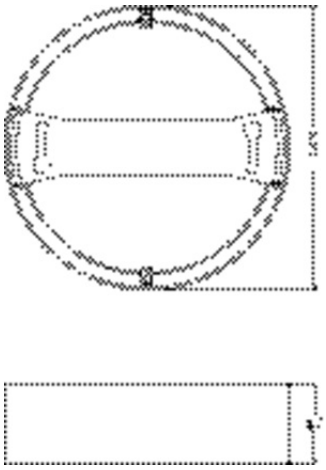

Materials & Colors

Product color	White
Housing color	White
Body material	Polycarbonate (PC)

Application & Mounting

Mounting type	Surface
Mounting location	Ceiling

DOWNLOAD DATA

	DOWNLOAD DATA
PDF	User instruction


LOGISTICAL DATA

© 2022, LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075709935	Shipping box 10	350 mm x 279 mm x 190 mm	1495.00 g	18.55 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



Model	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	f [mm]	g [mm]	h [mm]
DL IP44 DN90	Ø 75	Ø 88	Ø 90	3-25	68	40	>50	>70
DL IP44 DN110	Ø 100	Ø 93	Ø 115	3-25	68	40	>50	>70
DL IP44 DN165	Ø 160	Ø 143	Ø 165	3-25	68	40	>50	>70
DL IP44 DN190	Ø 174	Ø 168	Ø 190	3-25	68	40	>50	>70
DL IP44 DN215	Ø 200	Ø 194	Ø 215	3-25	68	40	>60	>70

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2022, LEDVANCE GmbH. All rights reserved.