



Description

Wall mounted exposed thermostatic bath shower mixer with wax thermostatic element, 1/2" connections, shut-off diverter valve and "plus" aerator. Built in non-return valve. Safety stop at 38°C. Centre distance 150 +/-20 mm. Flow rate bath 17,1 l/min. and shower 19,39 l/min. C2 class.

Finish




chrome
100272145

Certifications and quality characteristics



Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Spout (l/min)	0	6.83	10.15	14.79	18.48	21.4	24.05
Flow - Handshower (l/min)	0	7.9	11.71	17.33	21.18	24.78	27.79

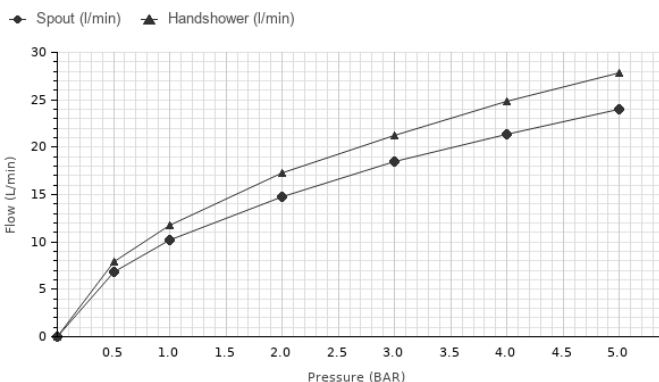

Technical drawing

Dimensions in mm

