



Description

Wall mounted exposed thermostatic shower mixer 1/2" with wax thermostatic element. Built in non-return valve. Safety stop at 38°C and Noken Eco-Stop button. Centre distance 150 +/-20 mm. Flow rate 21 l/min. at 3 bar. C2 class.

Finish




chrome
100272169

Certifications and quality characteristics



Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - l/min	0	8.89	13.35	19.63	24.33	28.31	31.86

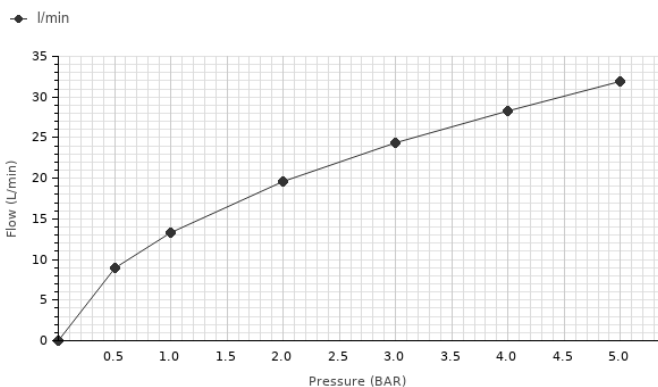

Technical drawing

Dimensions in mm

