Bathroom Taps

ACRO COMPACT





NEW



Description

Wall mounted exposed thermostatic bath shower mixer with wax thermostatic element, 1/2" connections, shut-off diverter valve and "plus" aerator. Built in non-return valve. Safety stop at 38°C. Centre distance 150 +/-20 mm. Flow rate at 3 bar is 24 L/min for shower and 25,9 L/min for bath.

Finish



Matt black 100328481


Other Finishes



Flow rate diagramme

PORCELANOSA BATHROOMS


Flow rate diagramme							
Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Handshower (I/min) (±15%)	0	8.8	13.8	20.1	24.1	27.3	29.7
Flow - Spout (I/min) (±15%)	0	10.6	15.5	22.3	25.9	32.6	36.8

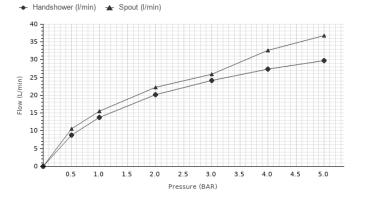

Technical drawing



Dimensions in mm



Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2023 noken | Edition: 07/07/2023 INT Ref.112908