Bathroom Taps

EX

NEW

URBAN N



Description

Wall mounted exposed thermostatic bath shower mixer with wax thermostatic element, 1/2'' connections, shut-off diverter valve and “plus” aerator. Built in non-return valve. Safety stop at 38ºC. Centre distance 150 +/-20 mm. Flow rate bath 17,4 l/min. and shower 19 l/min.

Finish


chrome
100345329

Other Finishes

Matt black
100345330


Flow rate diagramme

Pressure (bar)	**0**	**0.5**	**1**	**2**	**3**	**4**	**5**
Flow - Shower (l/min) (±15%)	0	7.2	10.6	15.3	19	21.8	24
Flow - Spout (l/min) (±15%)	0	6.6	9.9	14.2	17.4	20.3	22.8

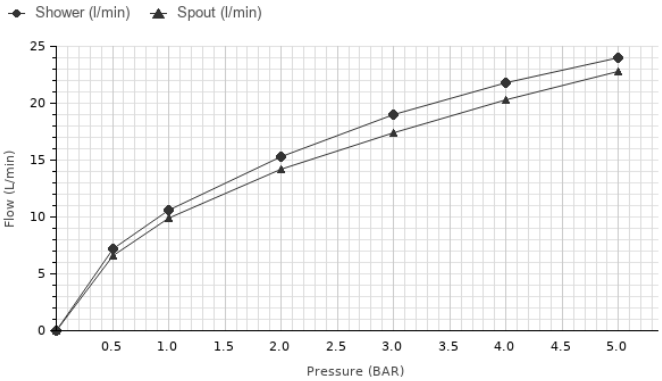

Technical drawing

Dimensions in mm

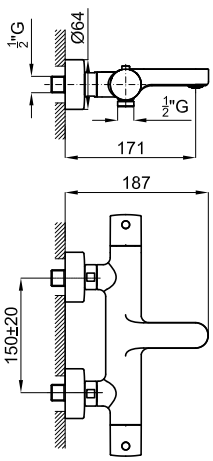

Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN´s Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2024 noken | Edition: 14/06/2024 INT Ref.093057