Shower Columns

SMART



Description

Shower column with mixer taps, shower head, rail with slider hand shower bracket and multifunction hand shower. Connections of 1/2 "and a distance of 150±15mm between them. It includes a non-return valve. The flow rate at 3 bar of the hand shower is 9 l/min and of the shower head 10,4 l/min. Additional flow restrictors are included whose flow rates at 3 bars are 6l/min for the hand shower and 6.4l/min for the shower head.

Finish


chrome
100354595

Other Finishes

Matt black
100354596


Flow rate diagramme (±15%)

Pressure (bar)	**0.5**	**1**	**2**	**3**	**4**	**5**
HANDSHOWER <10 L/MIN L/min	3.8	5.84	7.79	8.39	8.78	8.72
HANDSHOWER <6,6 L/MIN L/min	3.43	5.03	5.74	5.96	6.2	6.27
RAIN <12 L/MIN L/min	4.64	7.05	9.91	10.87	11.2	11.75

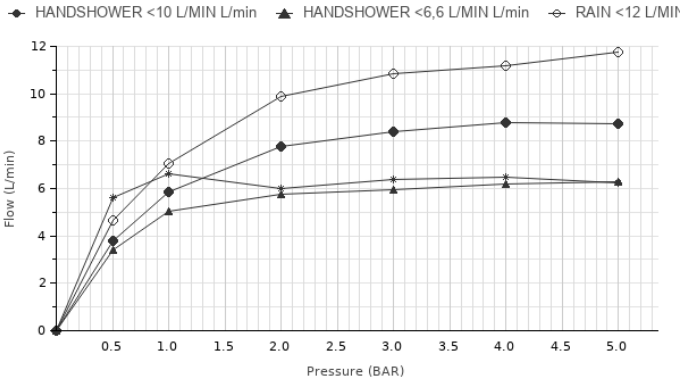

Technical drawing

Dimensions in mm

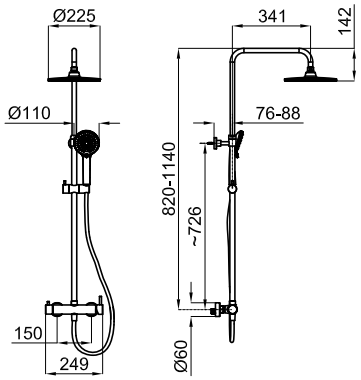

Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN´s Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2025 noken | Edition: 23/05/2025 INT Ref.082255.4457976