Shower Columns

# SMART



## Description

Thermostatic shower column with built-in wax thermoelement, shower head, rail with slider hand shower bracket and multifunction hand shower. Connections of 1/2 "and a distance of 150±15mm between them. It includes a non-return valve and safety stop at 38º. The flow rate at 3 bar of the hand shower is 6 l/min and of the shower head 10,4 l/min. An additional flow restrictor for the shower head is included which flow rate at 3 bars is 6.4 l/min.

## Finish


Matt black
100354598

**Other Finishes**

chrome
100354597

## Flow rate diagramme (±15%)

| **Pressure (bar)** | **0.5** | **1** | **2** | **3** | **4** | **5** |
|---|---|---|---|---|---|---|
| HANDSHOWER L/min | 3.73 | 5.53 | 5.58 | 6.03 | 6.14 | 6.24 |
| RAIN <12L/MIN L/min | 4.3 | 6.24 | 8.82 | 10.39 | 11.22 | 11.34 |
| RAIN <1,75LPM L/min | 5 | 6.18 | 6.03 | 6.41 | 6.5 | 6.3 |

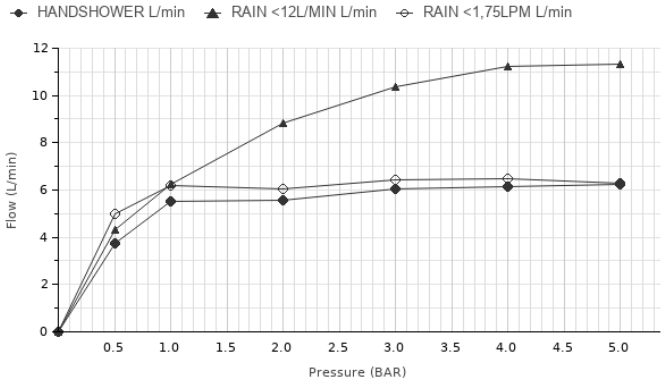


noken
PORCELANOSA BATHROOMS

**Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com**

Legal disclaimer: All details provided by the NOKEN´s Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2025 noken | Edition: 23/05/2025 INT Ref.082301.4457979