





PHOTOVOLTAIC GLASS		0_A_-16500850_-_-	
1650 x 850 mm		ref. M	ref. P
Electrical data test conditions (STC)		6" Mono-Cryst.	6" Poly-Cryst.
Nominal peak power	P_{mp} (Wp)	159	145
Open-circuit voltage	V_{oc} (V)	23	22
Short-circuit current	I_{sc} (A)	8.93	8.45
Voltage at nominal power	V_{mp} (V)	19	18
Current at nominal power	I_{mp} (A)	8.39	7.93
Power tolerance not to exceed	%	±10	±10

STC: 1000 w/m², AM 1.5 and a cell temperature of 25°C, stabilized module state.

Mechanical description		
Length	mm	1650
Width	mm	850
Thickness	mm	9,80 / 11,80 / 13,80 / 17,80
Surface area	sqm	1.40
Weight	Kg	28,00 / 35,00 / 42,00 / 56,00
Cell type (no PV cells)		6" Mono-C. (36) 6" Poly-C. (36)
Front Glass		4,0 / 5,0 / 6,0 / 8,0 Tempered Glass
Rear Glass		4,0 / 5,0 / 6,0 / 8,0 Tempered Glass
Thickness encapsulation	ref. A	1,80 mm EVA Foils
	ref. B	PVB Foils (not available)

Junction Box		
Protection		IP65
Wiring Section		2,5 mm ² / 4,0 mm ²
Limits		
Maximum system voltage	V_{sys} (V)	1,000
Operating module temperature	°C	-40...+85
Temperature Coefficients		
Temperature Coefficient of P_{mp}	%/°C	-0,451
Temperature Coefficient of V_{oc}	%/°C	-0,361
Temperature Coefficient of I_{sc}	%/°C	+0,08

* All technical specifications are subject to change without notice by Onyx Solar

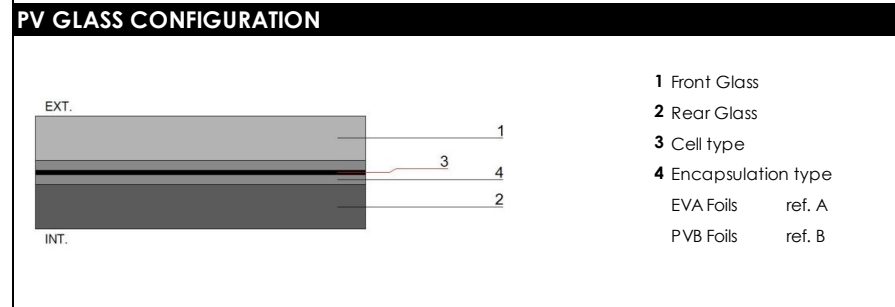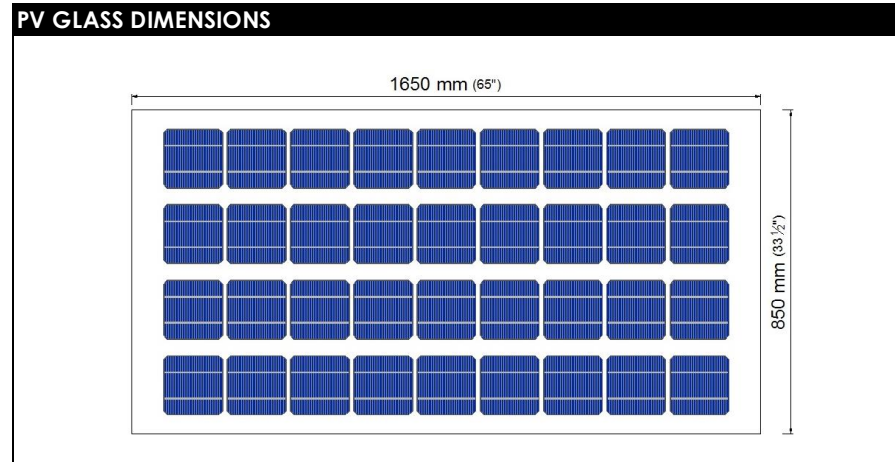

NOTES

- * For optical and further mechanical properties, please go to: **Technical Guide. 7.-Other Properties.**
- * Optional: Insulating Glass Unit. U v value (W/sqm.K), please go to: **Technical Guide. 8.-Insulating Glass Unit.**
- * Junction box type and location should be approved by the customer.

