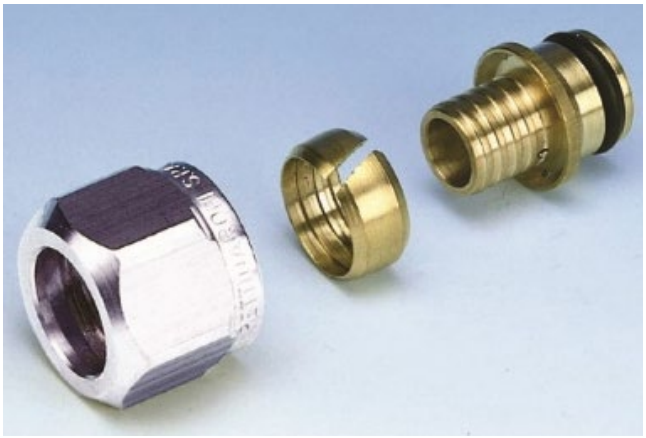


DESCRIPTION

3015


Complete brass adapter for polyethylene pipe, PEX and PERT.

For heating manifols series **7035** and **K7500**, manual radiator valves, radiator valves with thermostatic option and lockshields.

Available with three possible finishes: yellow, nickel plated or chrome plated (check availabilty at the "AVAILABLE PRODUCTS" chapter).

Conform to standard **EN1254-3**.

DIMENSIONS

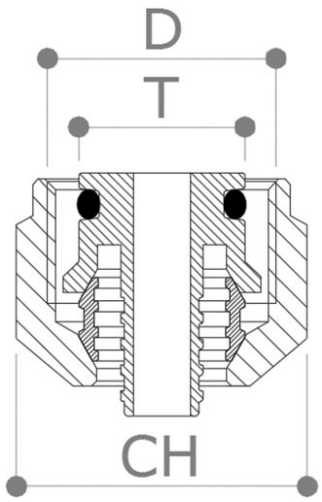

Dimensions in **mm** – **T** is the nominal dimension of the internal bore

Type	D	T	CH	Packging color	Weight [g]
16	22/19 x 1"	16	25	Blue	55
18	23/19 x 1"	18	26	Red	60
¾"	¾"	18	30	Colorless	60
1"	1"	24.7	38	Colorless	65

MATERIALS

Nut	CW614N (UNI EN 12164) CuZn39Pb3 or CW617N (UNI EN 12165) CuZn40Pb2
O-ring	1 x EPDM on the insert
Pipe clamp	CW614N (UNI EN 12164) CuZn39Pb3
Insert	CW614N (UNI EN 12164) CuZn39Pb3

APPROVALS

Approvals valid for the following pipe sizes:

- 12/10
- 16/13
- 20/16

STE0305 rev.02 11/04/2023

RECOMMENDED WORKING TEMPERATURE / PRESSURE LIMITS

10 bar – 90°C

⚠ Always verify the maximum operating temperature of the pipe.

AVAILABLE PRODUCTS

Refer to the following table to check the finishes available based on the model requested. The color of the line correspond to the color of the bag in which the adapter is contained.

Ø	Yellow	Nickel	Chrome*
16 x 10/8	√	√	
16 x 12/8.4	√	√	√
16 x 12/8	√	√	
16 x 12/10 CSTB	√	√	√
16 x 14/10	√	√	
16 x 16/10	√	√	√
16 x 16/11	√	√	√
16 x 16/11.6	√	√	√
16 x 16/12	√	√	√
16 x 16/12.4	√	√	√
16 x 16/13 CSTB	√	√	√
18 x 12/8	√	√	
18 x 12/10 CSTB	√	√	
18 x 14/10	√	√	√
18 x 15/10	√	√	√
18 x 16/10	√	√	√
18 x 16/11.6	√	√	√
18 x 16/12	√	√	√
18 x 16/13 CSTB	√	√	√


Ø	Yellow	Nickel	Chrome*
18 x 17/13	√	√	√
18 x 18/13	√	√	√
18 x 18/14	√	√	√
(¾" x 18) x 12/8	√	√	
(¾" x 18) x 12/10	√	√	
(¾" x 18) x 14/10	√	√	
(¾" x 18) x 15/10	√	√	
(¾" x 18) x 16/11	√	√	
(¾" x 18) x 16/11.6	√	√	
(¾" x 18) x 16/12	√	√	
(¾" x 18) x 16/12.4	√	√	
(¾" x 18) x 16/13 CSTB	√	√	
(¾" x 18) x 17/13	√	√	
(¾" x 18) x 18/13	√	√	
(¾" x 18) x 18/14	√	√	
(¾" x 18) x 20/14.4	√	√	
(¾" x 18) x 20/16 CSTB	√	√	
(1" x 24.7) x 20/16	√		
(1" x 24.7) x 25/20	√		

*For radiator valve **913**.

INSTALLATION

For the correct installation of the adapter follow the instruction below:

1. Cut the pipe vertically (perpendicular to the axis) by using a wheel pipe cutter;
2. Be sure the pipe is free of internal burrs, in case remove them;
3. Be sure the pipe clamp has the transversal cut;
4. Fit the nut, the pipe clamp and the insert onto the pipe in this order;
5. Couple the adapter and the valve and tighten the nut.

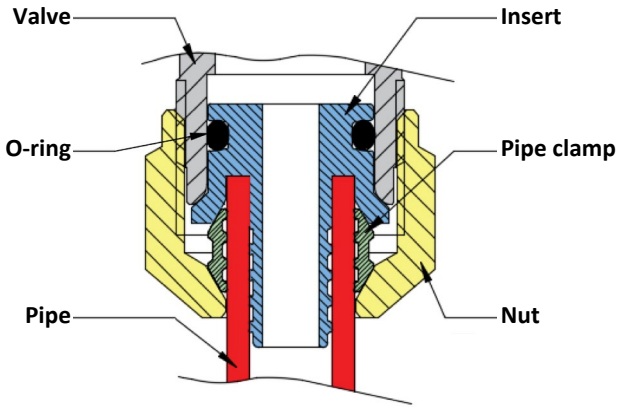

STI0305 rev.02 11/04/2023