
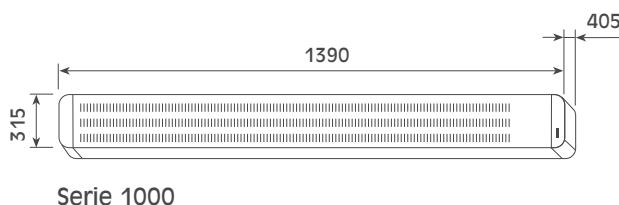


CARACTERÍSTICAS

- Para puertas de 4 a 8 mts.
- Montaje horizontal.

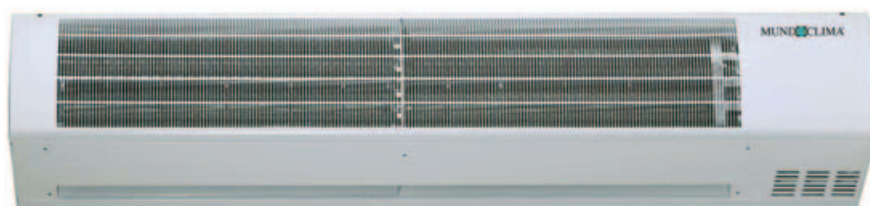

	Velocidad del aire	
	MU-CA F / E	MU-CA W
0 m	20 m/s	16 m/s
1 m	17 m/s	14 m/s
2 m	13,5 m/s	11 m/s
3 m	11 m/s	9,2 m/s
4 m	8 m/s	6,7 m/s
5 m	6 m/s	5 m/s
6 m	4,5 m/s	3,8 m/s
7 m	4 m/s	3,3 m/s
8 m	3,5 m/s	2,9 m/s

ESPECIFICACIONES TÉCNICAS

Modelo		1000F	1500F	1000E18	1000E24	1500E24	1500E36	1000W33	1000W50
Código		EC 06 390	EC 06 391	EC 06 392	EC 06 393	EC 06 394	EC 06 395	EC 06 396	EC 06 397
Alimentación	V	230	230	400+N	400+N	400+N	400+N	230	230
Potencia calorífica	kW	-	-	9/18	12/24	12/24	18/36	33	33
Salto térmico	ΔT	-	-	5/7/11/13	7/9/14/17	5/6/10/11	7/8/15/17	20/33	20/33
Velocidades	nº	2	2	2	2	2	2	2	2
Caudal de aire	m³/h	4100/5200	6700/8300	4100/5000	4100/5000	6500/7500	6500/7500	4100/5200	6500/7500
Velocidad salida	m/s	20	20	20	20	20	20	16	16
Intensidad absorb.	A	3	5	27	36	36,5	54	3	5
Mando control		Opcional	Opcional	Opcional	Opcional	Opcional	Opcional	Opcional	Opcional
Nivel sonoro	dB(A)	62	70	62	62	70	70	62	70
Peso	Kg	40	50	45	45	55	55	40	50
Color		RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003