



8 Console

(AM***FNUDEH***)

8-1. Specifications.....	102
8-2. Capacity tables	103
8-3. Dimensional drawing.....	105
8-4. Electrical wiring diagram	107
8-6. Sound pressure level	108
8-7. Temperature and air flow distribution.....	109

8-1. Specifications

1) Technical specifications

Model				AM028FNJDEH***	AM036FNJDEH***	AM056FNJDEH***	
Power Supply		Ø, #, V, Hz		1, 2, 220~240, 50	1, 2, 220~240, 50	1, 2, 220~240, 50	
Mode ^{*1)}			-	HP/HR	HP/HR	HP/HR	
Performance	Capacity (Nominal)	Cooling ^{*2)}	kW	2.8	3.6	5.6	
			Btu/h	9,600	12,300	19,100	
	Heating ^{*3)}	kW	3.2	4.0	6.3		
		Btu/h	10,900	13,600	21,500		
Power	Power Input (Nominal)	Cooling ^{*2)}	W	30	35	62	
				Heating ^{*3)}	30	35	62
	Current Input (Nominal)	Cooling ^{*2)}	A	0.25	0.29	0.49	
				Heating ^{*3)}	0.25	0.29	0.49
Fan	Motor	Type	-	Turbo Fan	Turbo Fan	Turbo Fan	
		Output	W	37	37	37	
		Number of unit	EA	1	1	1	
	Air Flow Rate	H/M/L (UL)	CMM	7.00/6.00/5.00	8.50/7.50/6.50	13.00/11.50/10.00	
			l/s	116.67/100.00/83.33	141.67/125.00/108.33	216.67/191.67/166.67	
	External Pressure	Min / Std / Max	mmAq	-	-	-	
			Pa	-	-	-	
			WG	-	-	-	
	Option Code			-	019044-1950B7-201C1C-330010	019044-1950D7-202424-330010	019044-19541B-203838-330010
	Piping Connections	Liquid Pipe	Ø, mm	6.35	6.35	6.35	
Ø, inch			1/4	1/4	1/4		
Gas Pipe		Ø, mm	12.70	12.70	12.70		
		Ø, inch	1/2	1/2	1/2		
Drain Pipe	Ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE			
Field Wiring	Power Source Wire	Below 20m / over 20m	mm ²	1.5 / 2.5	1.5 / 2.5	1.5 / 2.5	
	Transmission Cable		mm ²	0.75~1.5	0.75~1.5	0.75~1.5	
Refrigerant	Type	-		R410A	R410A	R410A	
	Control Method	-		EEV INCLUDED	EEV INCLUDED	EEV INCLUDED	
Sound	Sound Pressure	High / Mid / Low ^{*4)}	dB(A)	38 / 36 / 34	39 / 37 / 34	43 / 40 / 37	
Dimensions	Net Weight		kg	16.00	16.00	16.00	
	Shipping Weight		kg	21.00	21.00	21.00	
	Net Dimensions (W×H×D)		mm	720 x 620 x 199	720 x 620 x 199	720 x 620 x 199	
	Shipping Dimensions (W×H×D)		mm	810 x 710 x 295	810 x 710 x 295	810 x 710 x 295	
Panel Size	Panel model		-	-	-	-	
	Panel Net Weight		kg	-	-	-	
	Shipping Weight		kg	-	-	-	
	Net Dimensions (W×H×D)		mm	-	-	-	
	Shipping Dimensions (W×H×D)		mm	-	-	-	
Additional Accessories	Drain pump	Drain pump	- / Model	-	-	-	
		Max. lifting Height / Displacement	mm/liter/h	-	-	-	
	Air Filter		-		Long life filter	Long life filter	Long life filter

* Specifications may be subject to change without prior notice for product improvement.

***1) Mode**

- HP : Heat Pump, HR : Heat Recovery

***2) Nominal cooling capacities are based on;**

- Indoor temperature : 27°C DB, 19°C WB

- Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m

***3) Nominal heating capacities are based on;**

- Indoor temperature : 20°C DB, 15°C WB

- Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m

***4) Sound pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.**

8-2. Capacity tables

1) Cooling

TC : Total Capacity(kW), SHC : Sensible Heat Capacity(kW)

Model	Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)													
		20 (°C, DB) 14 (°C, WB)		23 (°C, DB) 16 (°C, WB)		26 (°C, DB) 18 (°C, WB)		27 (°C, DB) 19 (°C, WB)		28 (°C, DB) 20 (°C, WB)		30 (°C, DB) 22 (°C, WB)		32 (°C, DB) 24 (°C, WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
028	10	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.4	2.1
	12	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	14	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	16	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	18	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	20	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	21	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	23	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	25	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	27	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	29	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	31	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	33	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	35	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	37	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.1	2.2	3.3	2.0
	39	1.9	1.7	2.3	2.0	2.6	2.0	2.8	2.2	2.9	2.2	3.0	2.1	3.2	1.9
036	10	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.3	2.4
	12	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.3	2.4
	14	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.3	2.4
	16	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.3	2.4
	18	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.3	2.4
	20	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	21	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	23	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	25	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	27	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	29	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	31	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	33	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	35	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	4.0	2.5	4.2	2.3
	37	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	3.9	2.4	4.2	2.3
	39	2.5	2.0	2.9	2.3	3.4	2.4	3.6	2.5	3.7	2.5	3.9	2.4	4.1	2.2
056	10	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.6
	12	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.6
	14	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.6
	16	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.6
	18	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.6
	20	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	21	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	23	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	25	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	27	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	29	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	31	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	33	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	35	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.2	3.8	6.5	3.5
	37	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.1	3.6	6.5	3.5
	39	3.1	3.0	4.5	3.5	5.3	3.6	5.6	3.8	5.8	3.8	6.1	3.6	6.4	3.3

8-2. Capacity tables

2) Heating


TC : Total Capacity(kW)

Model	Outdoor temperature (°C)		Indoor temperature (°C, DB)				
			16.0	18.0	20.0	22.0	24.0
	DB	WB	TC	TC	TC	TC	TC
028	-20	-21	1.9	1.9	1.9	1.9	1.9
	-17	-18	2.0	2.0	2.0	2.0	1.9
	-15	-16	2.1	2.1	2.0	2.0	1.9
	-12	-13	2.2	2.2	2.2	2.1	2.1
	-10	-11	2.3	2.3	2.3	2.3	2.2
	-7	-8	2.5	2.4	2.4	2.4	2.3
	-5	-6	2.6	2.6	2.5	2.5	2.4
	-3	-4	2.8	2.7	2.7	2.6	2.5
	0	-1	2.9	2.8	2.8	2.7	2.6
	3	2.2	3.0	3.0	2.9	2.8	2.7
	5	4.1	3.2	3.1	3.1	2.9	2.7
	7	6	3.3	3.2	3.2	3.0	2.7
	9	7.9	3.4	3.3	3.2	3.0	2.7
	11	9.8	3.5	3.3	3.2	3.0	2.7
	13	12	3.6	3.4	3.2	3.0	2.7
15	14	3.7	3.4	3.2	3.0	2.7	
036	-20	-21	2.4	2.4	2.3	2.3	2.3
	-17	-18	2.6	2.5	2.4	2.4	2.3
	-15	-16	2.7	2.6	2.5	2.5	2.4
	-12	-13	2.8	2.7	2.7	2.6	2.6
	-10	-11	2.9	2.9	2.9	2.8	2.8
	-7	-8	3.1	3.1	3.0	3.0	2.9
	-5	-6	3.3	3.2	3.2	3.1	3.0
	-3	-4	3.4	3.4	3.3	3.2	3.1
	0	-1	3.6	3.6	3.5	3.4	3.2
	3	2.2	3.8	3.7	3.7	3.5	3.4
	5	4.1	3.9	3.9	3.8	3.6	3.4
	7	6	4.1	4.1	4.0	3.7	3.4
	9	7.9	4.2	4.1	4.0	3.7	3.4
	11	9.8	4.4	4.2	4.0	3.7	3.4
	13	12	4.5	4.2	4.0	3.7	3.4
15	14	4.6	4.3	4.0	3.7	3.4	
056	-20	-21	3.8	3.8	3.6	3.6	3.6
	-17	-18	4.1	3.9	3.8	3.8	3.6
	-15	-16	4.3	4.1	3.9	3.9	3.8
	-12	-13	4.4	4.3	4.3	4.1	4.1
	-10	-11	4.6	4.6	4.6	4.4	4.4
	-7	-8	4.9	4.9	4.7	4.7	4.6
	-5	-6	5.2	5.0	5.0	4.9	4.7
	-3	-4	5.4	5.4	5.2	5.0	4.9
	0	-1	5.7	5.7	5.5	5.4	5.0
	3	2.2	6.0	5.8	5.8	5.5	5.4
	5	4.1	6.1	6.1	6.0	5.7	5.4
	7	6	6.5	6.5	6.3	5.8	5.4
	9	7.9	6.6	6.5	6.3	5.8	5.4
	11	9.8	6.9	6.6	6.3	5.8	5.4
	13	12	7.1	6.6	6.3	5.8	5.4
15	14	7.2	6.8	6.3	5.8	5.4	

8-3. Dimensional drawing

1) AM028/036FNJDEH***

Unit:mm

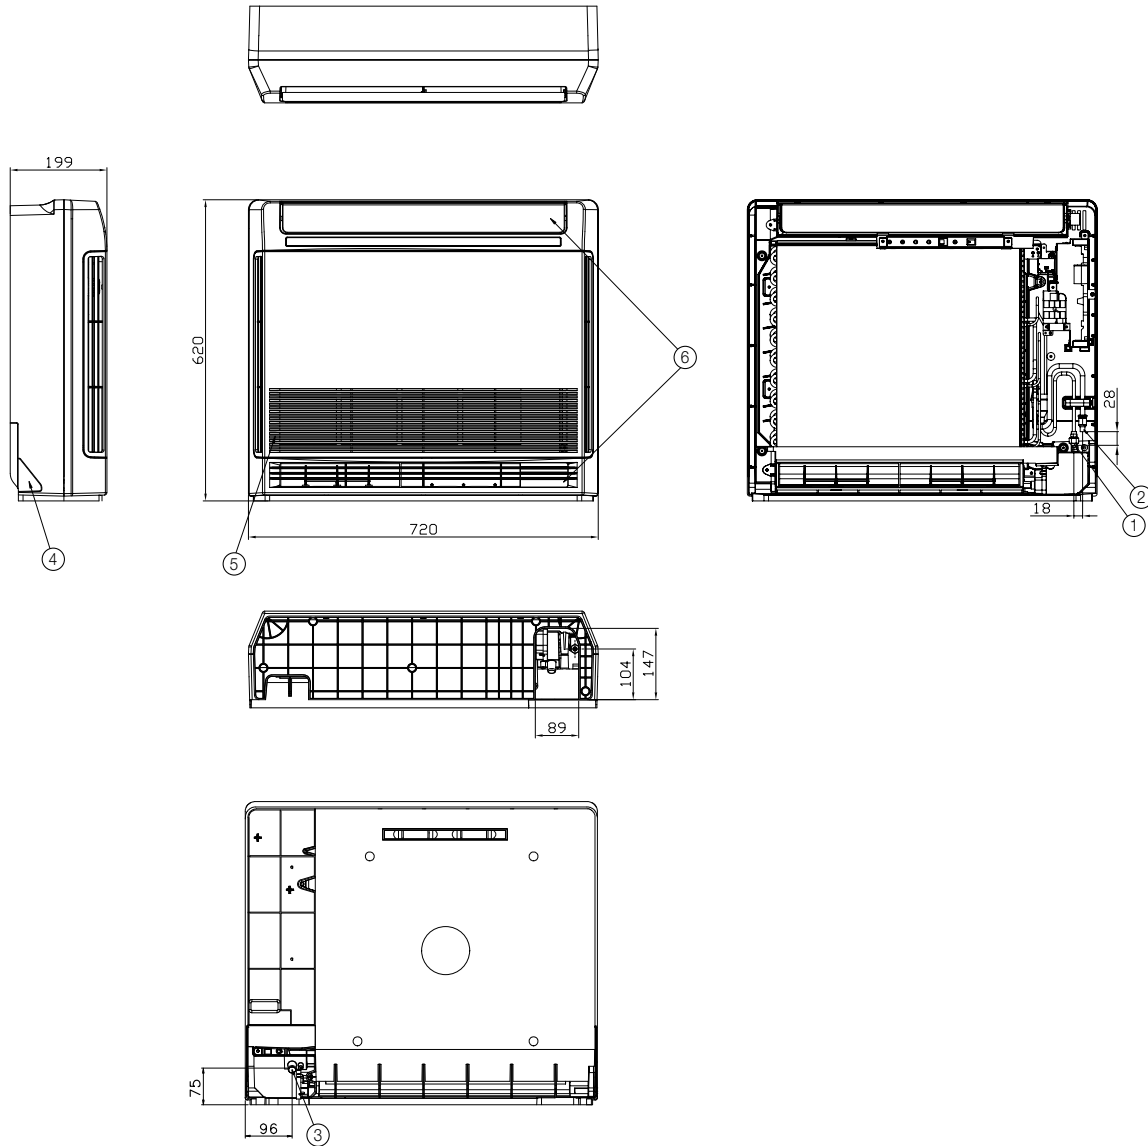


No.	Name	Description	
		2.8kW	3.6kW
①	Liquid pipe connection	Ø6.35 Flare	
②	Gas pipe connection	Ø12.70 Flare	
③	Drain pipe connection	ID18 Hose	
④	Conduit for power supply & communication wiring	-	
⑤	Air inlet grille	-	
⑥	Air outlet louver	-	

8-3. Dimensional drawing


2) AM056FNJDEH***

Unit:mm

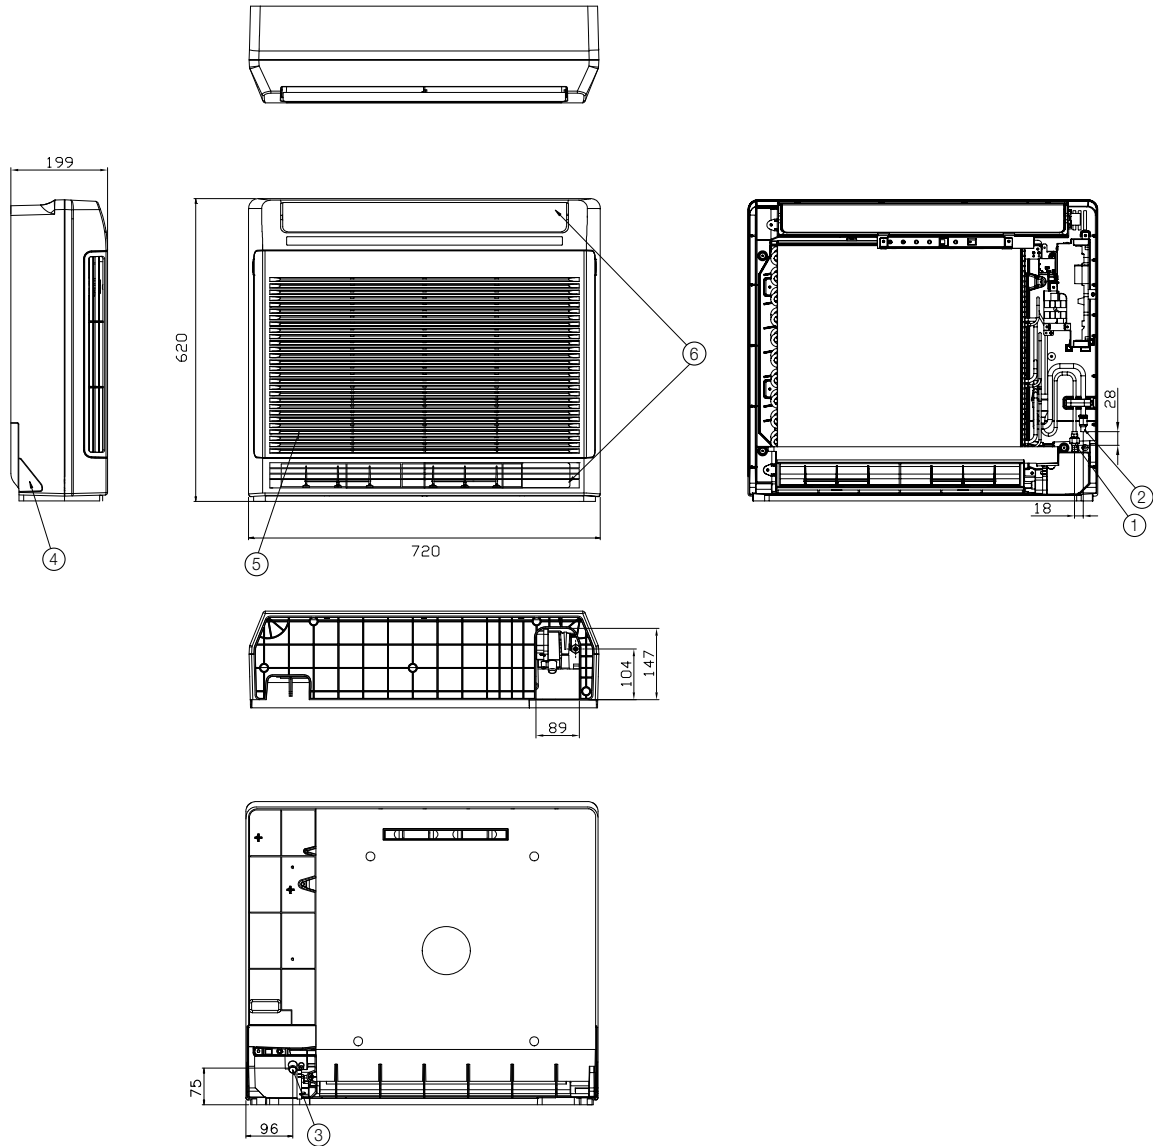

No.	Name	Description
		5.6kW
①	Liquid pipe connection	Ø6.35 Flare
②	Gas pipe connection	Ø12.70 Flare
③	Drain pipe connection	ID18 Hose
④	Conduit for power supply & communication wiring	-
⑤	Air inlet grille	-
⑥	Air outlet louver	-


8-4. Electrical wiring diagram

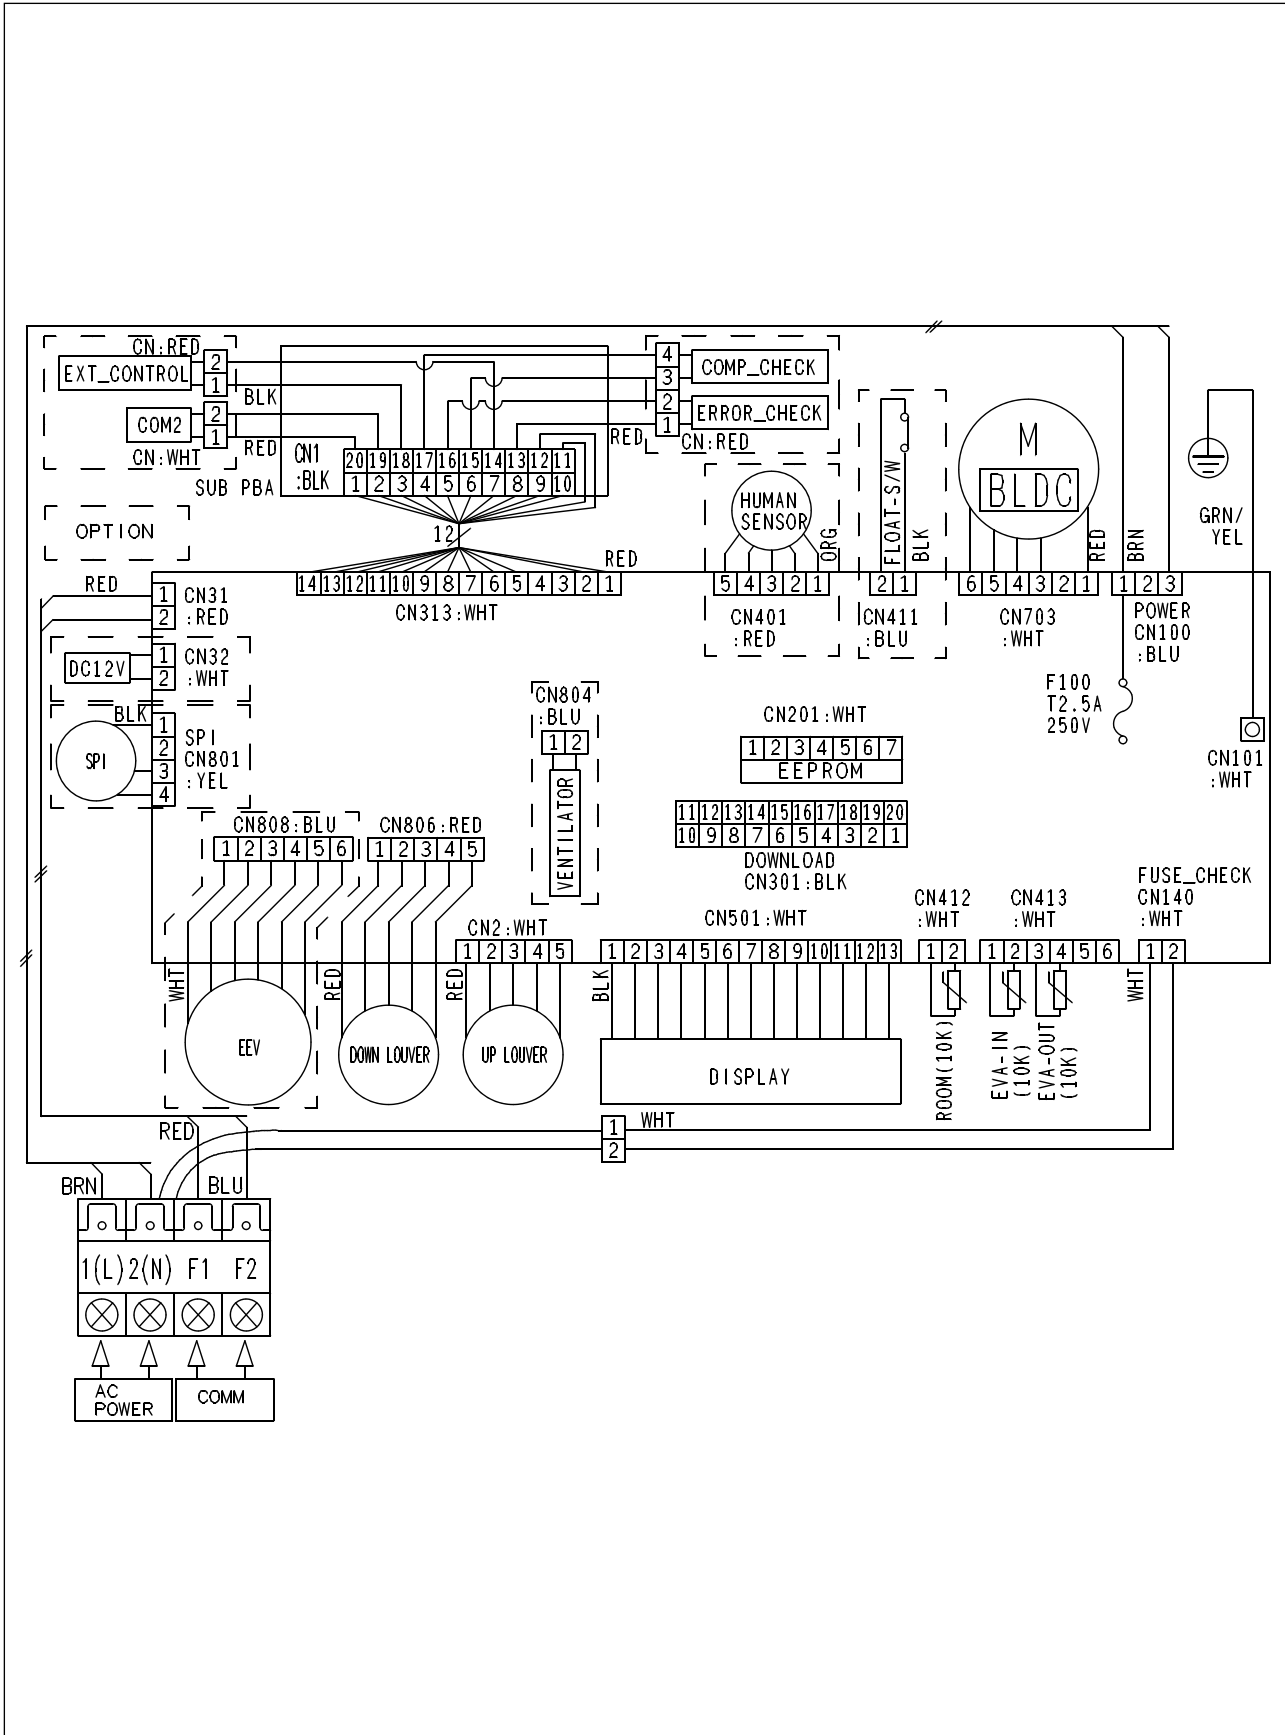

8-5. Sound pressure level

1) Operation sound level

Unit : dB(A)

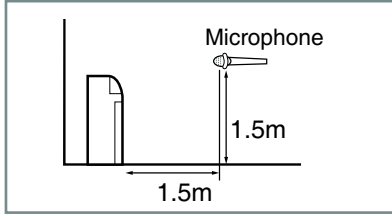


Model	High	Low
AM028FNJDEH***	38	34
AM036FNJDEH***	39	34
AM056FNJDEH***	43	37

Note


- ◆ These operation values were obtained in an anechoic room. Sound pressure level will vary depending on a range of factors such as the construction of the particular room where the equipment is installed.
- ◆ Operation sound level may differ depending on operation and ambient conditions.

2) NC curves


(1) AM028FNJDEH***

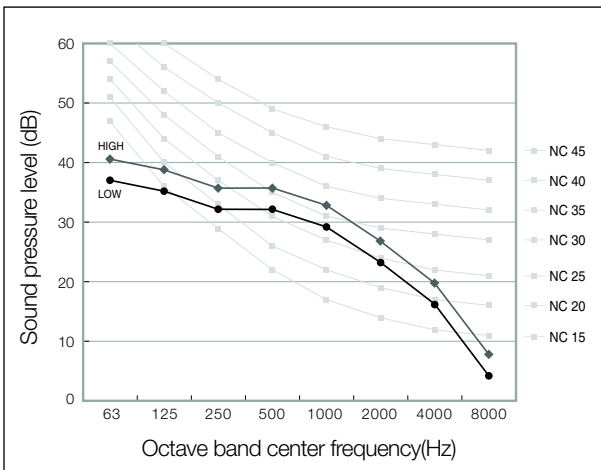

(2) AM036FNJDEH***

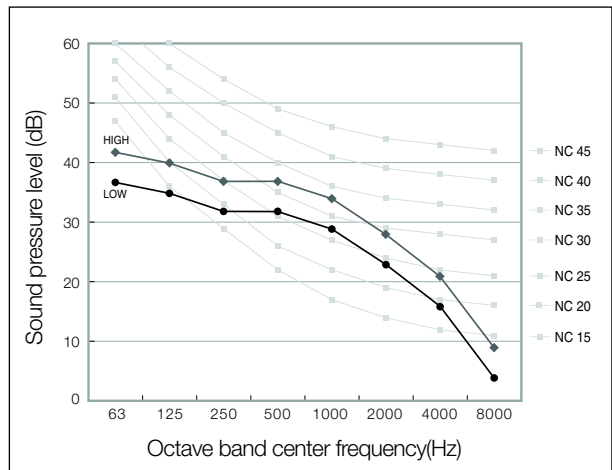

(3) AM056FNJDEH***

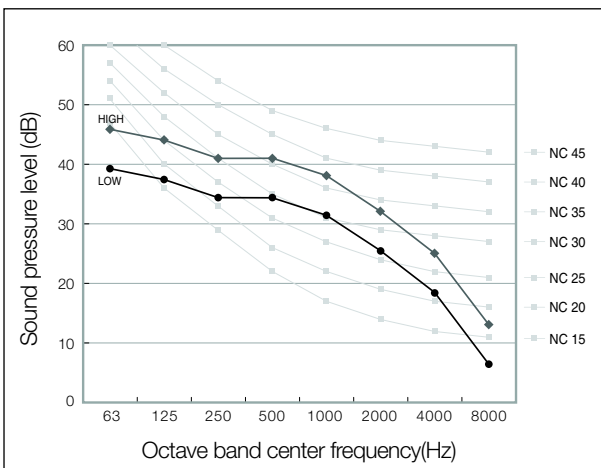


8-6. Temperature and air flow distribution

1) AM036FNJDEH***


(1) Cooling air velocity distribution

◆ Discharge angle : 36°

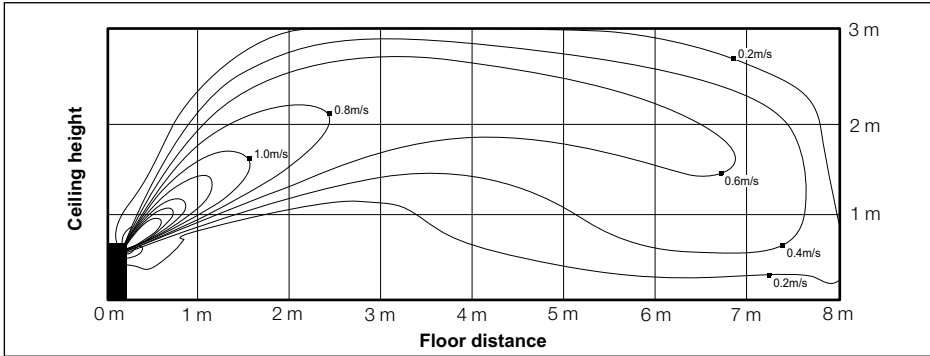


(2) Cooling temperature distribution

◆ Discharge angle : 36°

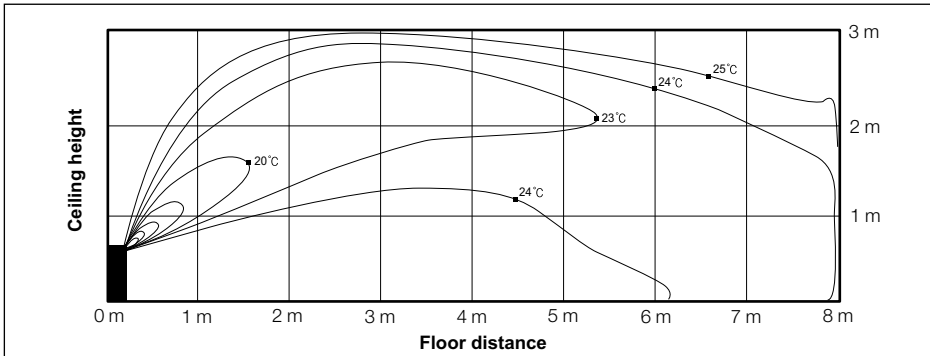

(3) Heating air velocity distribution

◆ Discharge angle : 54°

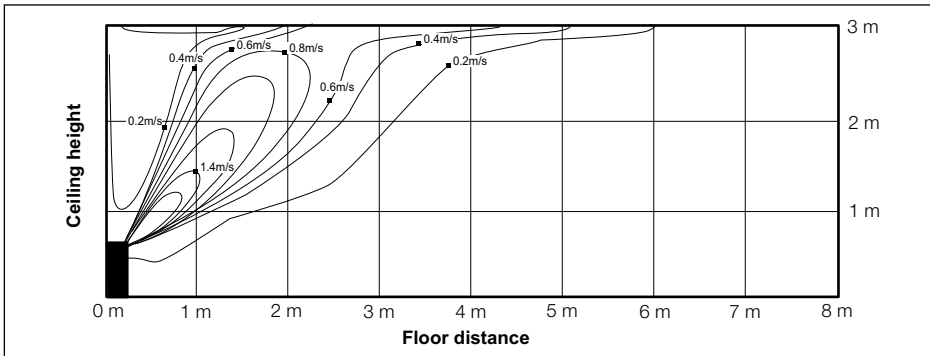

(4) Heating temperature distribution

◆ Discharge angle : 54°

