






IKUSI
velatia

smartexperience

Distribuidores de interior serie UDF

Elementos de distribución idóneos para instalaciones ICT

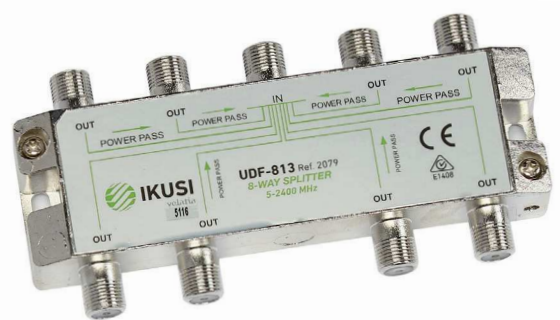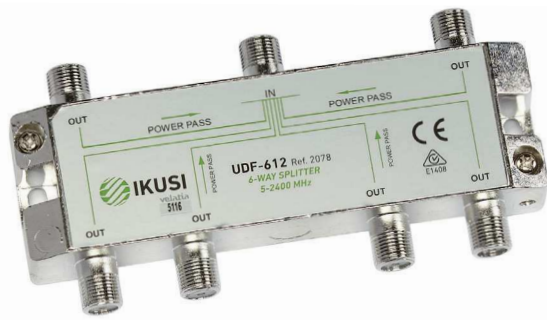

Distribuidores con paso de corriente entre todas las salidas y la entrada

| MODELO | | | UDF-205 | UDF-307 | UDF-408 | UDF-612 | UDF-813 |
|----------------------------|---------------|----|---------|---------|---------|---------|---------|
| REF. | | | 2075 | 2076 | 2077 | 2078 | 2079 |
| Número de salidas | | | 2 | 3 | 4 | 6 | 8 |
| Atenuación de distribución | 5-862 MHz | dB | ≤ 3,6 | ≤ 6,8 | ≤ 8,1 | ≤ 11,8 | ≤ 11,9 |
| | 950-1550 MHz | | ≤ 4,1 | ≤ 8,5 | ≤ 9,1 | ≤ 13,5 | ≤ 14,1 |
| | 1551-2150 MHz | | ≤ 4,5 | ≤ 9,7 | ≤ 10,4 | ≤ 15,1 | ≤ 15,8 |
| | 2151-2400 MHz | | ≤ 6 | ≤ 10,1 | ≤ 11 | ≤ 15,1 | ≤ 17 |
| Desacoplo entre salidas | 5-300 MHz | dB | ≥ 35 | ≥ 25 | ≥ 24 | ≥ 28 | ≥ 26 |
| | 301-862 MHz | | ≥ 34 | ≥ 25 | ≥ 22 | ≥ 25 | ≥ 28 |
| | 950-2400 MHz | | ≥ 20 | ≥ 21 | ≥ 22 | ≥ 25 | ≥ 28 |

Distribuidores UDF



Pº Miramón, 170
20014 San Sebastián - SPAIN
Tel.: +34 943 44 88 00 - Fax: +34 943 44 88 20
television@ikusi.com - www.ikusi.tv