


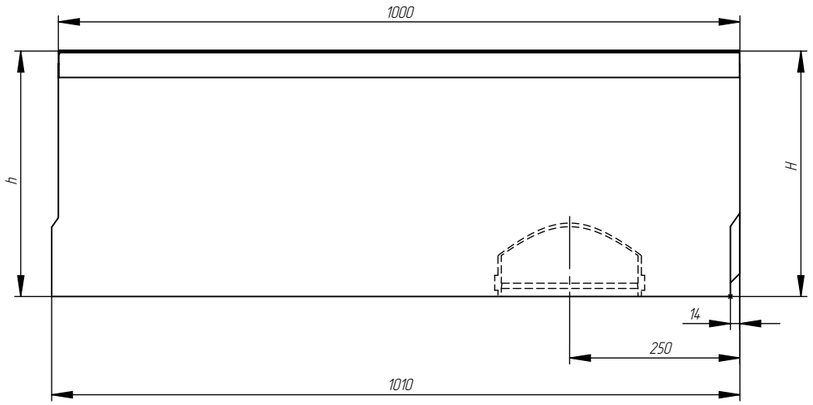


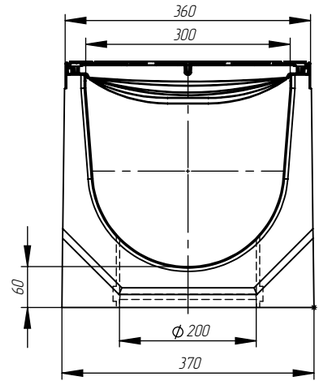


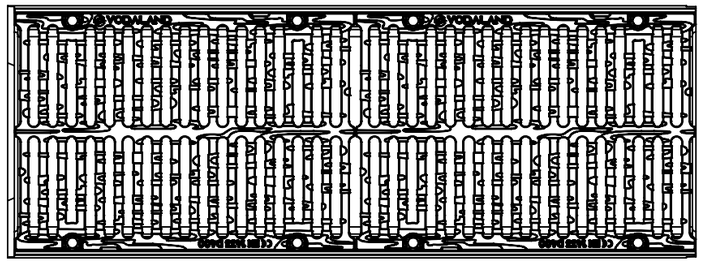

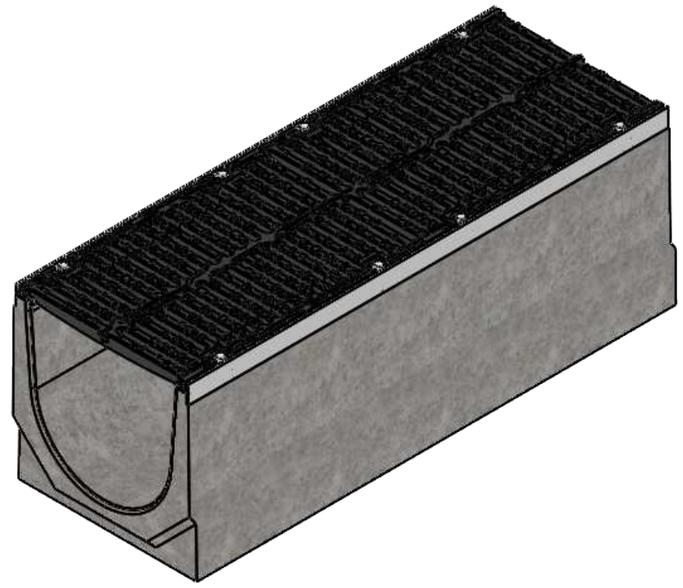


Channel with slotted Grate D400

Cascade 5 mm



Sloped 0,5%




Article	H/h, mm	Weight kg
047071334/410	410	171,4
047071334/405	405	170,7
047071334/400	400	170,0
047071334/395	395	169,3
047071334/390	390	168,6
047071334/385	385	167,9
047071334/380	380	167,2
047071334/375	375	166,5
047071334/370	370	165,8
047071334/365	365	165,1
047071334/360	360	164,4
047071334/355	355	163,7
047071334/350	350	163,0
047071334/345	345	162,3
047071334/340	340	161,6
047071334/335	335	160,9
047071334/330	330	160,2
047071334/325	325	159,5
047071334/320	320	158,8
047071334/315	315	158,1
047071334/310	310	157,4
047071334/305	305	156,7
047071334/300	300	156,0
047071334/295	295	155,3
047071334/290	290	154,6
047071334/285	285	153,9
047071334/280	280	153,2
047071334/275	275	152,5
047071334/270	270	151,8
047071334/265	265	151,1
047071334/260	260	150,4


Article	H/h, mm	Weight kg
047071334/410-405	410/405	171,0
047071334/405-400	405/400	170,3
047071334/400-395	400/395	169,6
047071334/395-390	395/390	168,6
047071334/390-385	390/385	168,2
047071334/385-380	385/380	167,5
047071334/380-375	380/375	166,8
047071334/375-370	375/370	166,1
047071334/370-365	370/365	165,4
047071334/365-360	365/360	164,7
047071334/360-355	360/355	164,0
047071334/355-350	355/350	163,3
047071334/350-345	350/345	162,6
047071334/345-340	345/340	161,9
047071334/340-335	340/335	161,2
047071334/335-330	335/330	160,5
047071334/330-325	330/325	159,8
047071334/325-320	325/320	159,1
047071334/320-315	320/315	158,4
047071334/315-310	315/310	157,7
047071334/310-305	310/305	157,0
047071334/305-300	305/300	156,3
047071334/300-295	300/295	155,6
047071334/295-290	295/290	154,9
047071334/290-285	290/285	154,2
047071334/285-280	285/280	153,5
047071334/280-275	280/275	152,8
047071334/275-270	275/270	152,1
047071334/270-265	270/265	151,4
047071334/265-260	265/260	150,7

Channel with slotted Grate D400 and vertical outlet 200

Cascade 5 mm



Sloped 0,5%



Article	H/h, mm	Weight kg
04707133409/410-P200	410	166,5
04707133409/405-P200	405	165,8
04707133409/400-P200	400	165,1
04707133409/395-P200	395	164,7
04707133409/390-P200	390	163,7
04707133409/385-P200	385	163,0
04707133409/380-P200	380	162,3
04707133409/375-P200	375	161,6
04707133409/370-P200	370	160,9
04707133409/365-P200	365	160,2
04707133409/360-P200	360	159,5
04707133409/355-P200	355	158,8
04707133409/350-P200	350	158,1
04707133409/345-P200	345	157,4
04707133409/340-P200	340	156,7
04707133409/335-P200	335	156,0
04707133409/330-P200	330	155,3
04707133409/325-P200	325	154,5
04707133409/320-P200	320	153,8
04707133409/315-P200	315	153,1
04707133409/310-P200	310	152,4
04707133409/305-P200	305	151,7
04707133409/300-P200	300	151,0
04707133409/295-P200	295	150,3
04707133409/290-P200	290	149,6
04707133409/285-P200	285	148,9
04707133409/280-P200	280	148,3
04707133409/275-P200	275	147,6
04707133409/270-P200	270	146,9
04707133409/265-P200	265	146,2
04707133409/260-P200	260	145,5

Article	H/h, mm	Weight kg
04707133409/410-405-P200	410/405	166,2
04707133409/405-400-P200	405/400	165,5
04707133409/400-395-P200	400/395	164,8
04707133409/395-390-P200	395/390	164,1
04707133409/390-385-P200	390/385	163,4
04707133409/385-380-P200	385/380	162,7
04707133409/380-375-P200	380/375	162,0
04707133409/375-370-P200	375/370	161,3
04707133409/370-365-P200	370/365	160,6
04707133409/365-360-P200	365/360	159,9
04707133409/360-355-P200	360/355	159,2
04707133409/355-350-P200	355/350	158,5
04707133409/350-345-P200	350/345	157,8
04707133409/345-340-P200	345/340	157,1
04707133409/340-335-P200	340/335	156,4
04707133409/335-330-P200	335/330	155,7
04707133409/330-325-P200	330/325	155,0
04707133409/325-320-P200	325/320	154,3
04707133409/320-315-P200	320/315	153,6
04707133409/315-310-P200	315/310	152,9
04707133409/310-305-P200	310/305	152,2
04707133409/305-300-P200	305/300	151,5
04707133409/300-295-P200	300/295	150,8
04707133409/295-290-P200	295/290	150,1
04707133409/290-285-P200	290/285	149,4
04707133409/285-280-P200	285/280	148,7
04707133409/280-275-P200	280/275	148,0
04707133409/275-270-P200	275/270	147,3
04707133409/270-265-P200	270/265	146,6
04707133409/265-260	265/260	145,9

1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
						VODALAND	
	NAME	SIGNATURE	DATE			TITLE: Concrete Drain Channel Pro DN300 H260-410 with Cast Iron Grate D400	
DRAWN	Olender		07.11.23				
CHK'D	Kyselytsia						
APPV'D	Malynovskiy						
MFG							
Q.A				MATERIAL: Concrete, Cast Iron		ARTICLE:	A3
				WEIGHT: kg		SCALE:1:9	SHEET 1 OF 1