


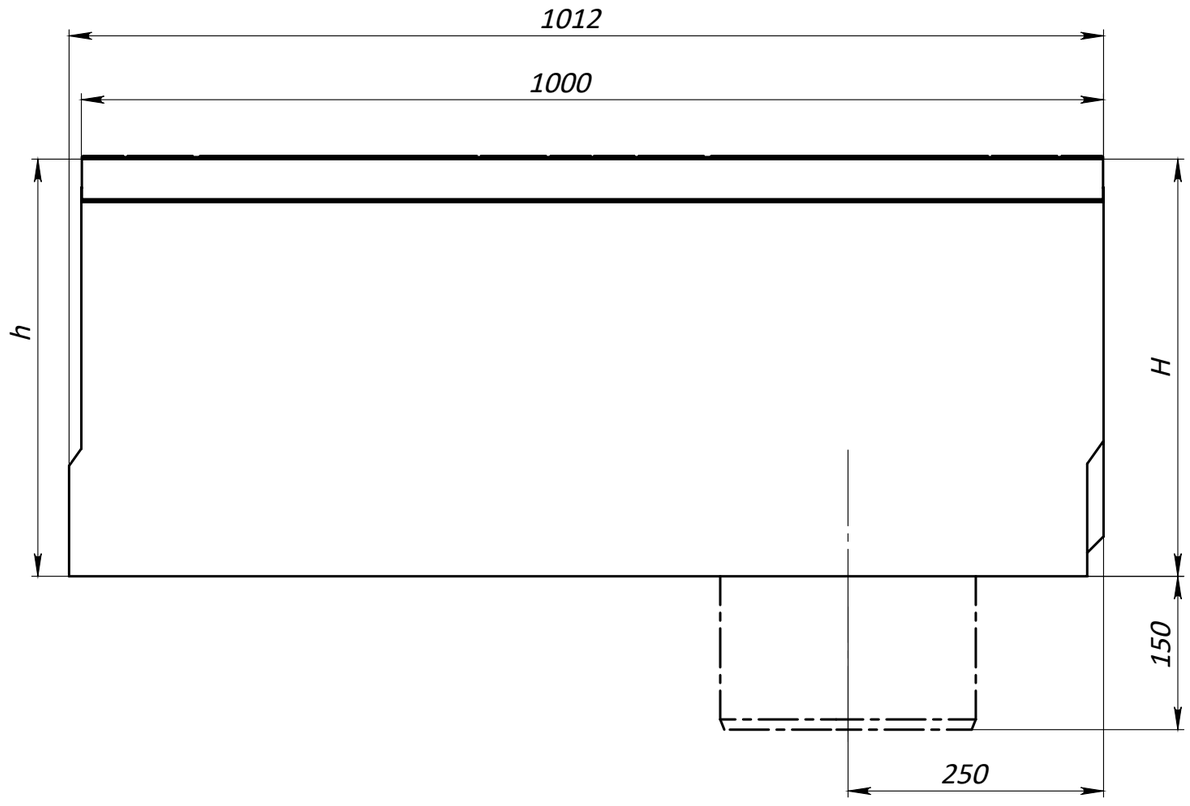


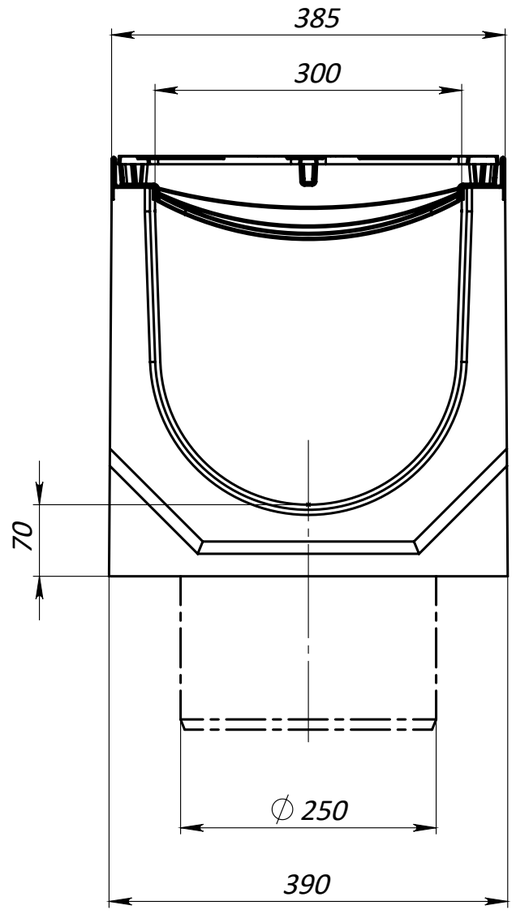

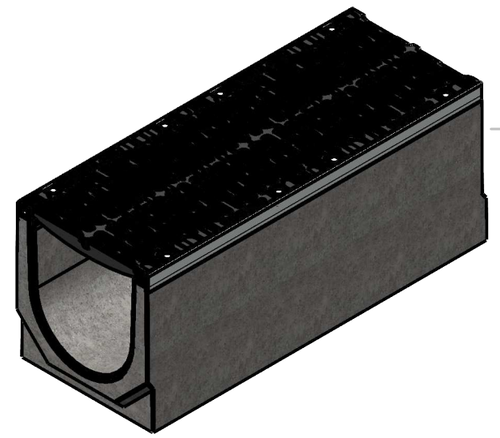

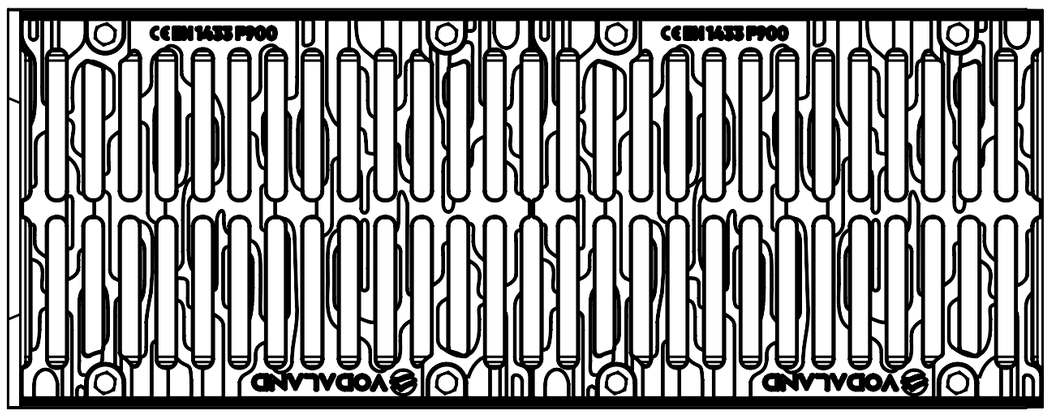

1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION A-01
	NAME	SIGNATURE	DATE		VODALAND	
DRAWN	O. Dyka		31.05.2024		TITLE: Concrete Drain Channel Mega DN300 H610-260 with Cast Iron Grate F900	
CHK'D	V. Kyselytsia					
APPV'D	I. Malynovskiy					
MFG						
Q.A				MATERIAL: Concrete, Cast Iron	ARTICLE:	A3
				WEIGHT: kg	SCALE:1:6	SHEET 1 OF 2

Channel with Grate F900



Article	H/h, mm	Weight kg
04701/610	610	264,9
04701/605	605	263,8
04701/600	600	262,8
04701/595	595	261,7
04701/590	590	260,7
04701/585	585	259,6
04701/580	580	258,6
04701/575	575	257,5
04701/570	570	256,5
04701/565	565	255,4
04701/560	560	254,4
04701/555	555	253,3
04701/550	550	252,3
04701/545	545	251,2
04701/540	540	250,2
04701/535	535	249,1
04701/530	530	248,1
04701/525	525	247,0
04701/520	520	246,0
04701/515	515	244,9
04701/510	510	243,9
04701/505	505	242,8
04701/500	500	241,8
04701/495	495	240,7
04701/490	490	239,7
04701/485	485	238,6
04701/480	480	237,6
04701/475	475	236,5
04701/470	470	235,5
04701/465	465	234,4
04701/460	460	233,4
04701/455	455	232,3
04701/450	450	231,3
04701/445	445	230,2
04701/440	440	229,2
04701/435	435	228,1
04701/430	430	227,1
04701/425	425	226,0
04701/420	420	225,0
04701/415	415	223,9
04701/410	410	222,9
04701/405	405	221,8
04701/400	400	220,8
04701/395	395	219,7
04701/390	390	218,6
04701/385	385	217,6
04701/380	380	216,5
04701/375	375	215,5
04701/370	370	214,4
04701/365	365	213,4
04701/360	360	212,3
04701/355	355	211,3
04701/350	350	210,2
04701/345	345	209,2
04701/340	340	208,1
04701/335	335	207,1
04701/330	330	206,0
04701/325	325	205,0
04701/320	320	203,9
04701/315	315	202,9
04701/310	310	201,8
04701/305	305	200,8
04701/300	300	199,7
04701/295	295	198,7
04701/290	290	197,6
04701/285	285	196,6
04701/280	280	195,5
04701/275	275	194,5
04701/270	270	193,4
04701/265	265	192,4
04701/260	260	191,3

Article	H/h, mm	Weight kg
04701/610-605	610/605	264,3
04701/605-600	605/600	263,3
04701/600-595	600/595	262,3
04701/595-590	595/590	261,2
04701/590-585	590/585	260,2
04701/585-580	585/580	259,1
04701/580-575	580/575	258,1
04701/575-570	575/570	257,0
04701/570-565	570/565	256,0
04701/565-560	565/560	254,9
04701/560-555	560/555	253,9
04701/555-550	555/550	252,8
04701/550-545	550/545	251,8
04701/545-540	545/540	250,7
04701/540-535	540/535	249,7
04701/535-530	535/530	248,6
04701/530-252	530/525	247,6
04701/525-520	525/520	246,5
04701/520-515	520/515	245,5
04701/515-510	515/510	244,4
04701/510-505	510/505	243,4
04701/505-500	505/500	242,3
04701/500-495	500/495	241,3
04701/495-490	495/490	240,2
04701/490-485	490/485	239,2
04701/485-480	485/480	238,1
04701/480-475	480/475	237,1
04701/475-470	475/470	236,0
04701/470-465	470/465	235,0
04701/465-460	465/460	233,9
04701/460-455	460/455	232,9
04701/455-450	455/450	231,8
04701/450-445	450/445	230,8
04701/445-440	445/440	229,7
04701/440-435	440/435	228,7
04701/435-430	435/430	227,6
04701/430-425	430/425	226,6
04701/425-420	425/420	225,5
04701/420-415	420/415	224,5
04701/415-410	415/410	223,4
04701/410-405	410/405	222,4
04701/405-400	405/400	221,3
04701/400-395	400/395	220,3
04701/395-390	395/390	219,2
04701/390-385	390/385	218,1
04701/385-380	385/380	217,1
04701/380-375	380/375	216,0
04701/375-370	375/370	215,0
04701/370-365	370/365	213,9
04701/365-360	365/360	212,9
04701/360-355	360/355	211,8
04701/355-350	355/350	210,8
04701/350-345	350/345	209,7
04701/345-340	345/340	208,7
04701/340-335	340/335	207,6
04701/335-330	335/330	206,6
04701/330-325	330/325	205,5
04701/325-320	325/320	204,5
04701/320-315	320/315	203,4
04701/315-310	315/310	202,4
04701/310-305	310/305	201,3
04701/305-300	305/300	200,3
04701/300-295	300/295	199,2
04701/295-290	295/290	198,2
04701/290-285	290/285	197,1
04701/285-280	285/280	196,1
04701/280-275	280/275	195,0
04701/275-270	275/270	194,0
04701/270-265	270/265	192,9
04701/265-260	265/260	191,9

Channel with Grate F900 and vertical outlet 250



Article	H/h, mm	Weight kg
0470109/610	610	255,6
0470109/605	605	254,6
0470109/600	600	253,5
0470109/595	595	252,5
0470109/590	590	251,4
0470109/585	585	250,4
0470109/580	580	249,3
0470109/575	575	248,3
0470109/570	570	247,2
0470109/565	565	246,2
0470109/560	560	245,1
0470109/555	555	244,1
0470109/550	550	243,0
0470109/545	545	242,0
0470109/540	540	240,9
0470109/535	535	239,9
0470109/530	530	238,8
0470109/525	525	237,8
0470109/520	520	236,7
0470109/515	515	235,7
0470109/510	510	234,6
0470109/505	505	233,6
0470109/500	500	232,5
0470109/495	495	231,5
0470109/490	490	230,4
0470109/485	485	229,4
0470109/480	480	228,3
0470109/475	475	227,3
0470109/470	470	226,2
0470109/465	465	225,2
0470109/460	460	224,1
0470109/455	455	223,1
0470109/450	450	222,0
0470109/445	445	221,0
0470109/440	440	219,9
0470109/435	435	218,9
0470109/430	430	217,8
0470109/425	425	216,8
0470109/420	420	215,7
0470109/415	415	214,7
0470109/410	410	213,6
0470109/405	405	212,6
0470109/400	400	211,5
0470109/395	395	210,5
0470109/390	390	209,4
0470109/385	385	208,3
0470109/380	380	207,3
0470109/375	375	206,2
0470109/370	370	205,2
0470109/365	365	204,1
0470109/360	360	203,1
0470109/355	355	202,0
0470109/350	350	201,0
0470109/345	345	199,9
0470109/340	340	198,9
0470109/335	335	197,8
0470109/330	330	196,8
0470109/325	325	195,7
0470109/320	320	194,7
0470109/315	315	193,6
0470109/310	310	192,6
0470109/305	305	191,5
0470109/300	300	190,5
0470109/295	295	189,4
0470109/290	290	188,4
0470109/285	285	187,3
0470109/280	280	186,3
0470109/275	275	185,2
0470109/270	270	184,2
0470109/265	265	183,1
0470109/260	260	182,1

Article	H/h, mm	Weight kg
0470109/610-605	610/605	255,1
0470109/605-600	605/600	254,1
0470109/600-595	600/595	253,0
0470109/595-590	595/590	252,0
0470109/590-585	590/585	250,9
0470109/585-580	585/580	249,9
0470109/580-575	580/575	248,8
0470109/575-570	575/570	247,8
0470109/570-565	570/565	246,7
0470109/565-560	565/560	245,7
0470109/560-555	560/555	244,6
0470109/555-550	555/550	243,6
0470109/550-545	550/545	242,5
0470109/545-540	545/540	241,5
0470109/540-535	540/535	240,4
0470109/535-530	535/530	239,4
0470109/530-252	530/525	238,3
0470109/525-520	525/520	237,3
0470109/520-515	520/515	236,2
0470109/515-510	515/510	235,2
0470109/510-505	510/505	234,1
0470109/505-500	505/500	233,1
0470109/500-495	500/495	232,0
0470109/495-490	495/490	231,0
0470109/490-485	490/485	229,9
0470109/485-480	485/480	228,9
0470109/480-475	480/475	227,8
0470109/475-470	475/470	226,8
0470109/470-465	470/465	225,7
0470109/465-460	465/460	224,7
0470109/460-455	460/455	223,6
0470109/455-450	455/450	222,6
0470109/450-445	450/445	221,5
0470109/445-440	445/440	220,5
0470109/440-435	440/435	219,4
0470109/435-430	435/430	218,4
0470109/430-425	430/425	217,3
0470109/425-420	425/420	216,3
0470109/420-415	420/415	215,2
0470109/415-410	415/410	214,2
0470109/410-405	410/405	213,1
0470109/405-400	405/400	212,1
0470109/400-395	400/395	211,0
0470109/395-390	395/390	210,0
0470109/390-385	390/385	208,9
0470109/385-380	385/380	207,8
0470109/380-375	380/375	206,8
0470109/375-370	375/370	205,7
0470109/370-365	370/365	204,7
0470109/365-360	365/360	203,6
0470109/360-355	360/355	202,6
0470109/355-350	355/350	201,5
0470109/350-345	350/345	200,5
0470109/345-340	345/340	199,4
0470109/340-335	340/335	198,4
0470109/335-330	335/330	197,3
0470109/330-325	330/325	196,3
0470109/325-320	325/320	195,2
0470109/320-315	320/315	194,2
0470109/315-310	315/310	193,1
0470109/310-305	310/305	192,1
0470109/305-300	305/300	191,0
0470109/300-295	300/295	190,0
0470109/295-290	295/290	188,9
0470109/290-285	290/285	187,9
0470109/285-280	285/280	186,8
0470109/280-275	280/275	185,8
0470109/275-270	275/270	184,7
0470109/270-265	270/265	183,7
0470109/265-260	265/260	182,6

1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES			DO NOT SCALE DRAWING	REVISION A-01
	NAME	SIGNATURE	DATE			TITLE: Concrete Drain Channel Mega DN300 H610-260 with Cast Iron Grate F900	
DRAWN	O. Dyka		31.05.2024				
CHK'D	V. Kyselytsia						
APPV'D	I. Malynovskiy						
MFG							
Q.A				MATERIAL: Concrete, Cast Iron		ARTICLE:	A3
				WEIGHT: kg		SCALE:1:10	SHEET 2 OF 2