


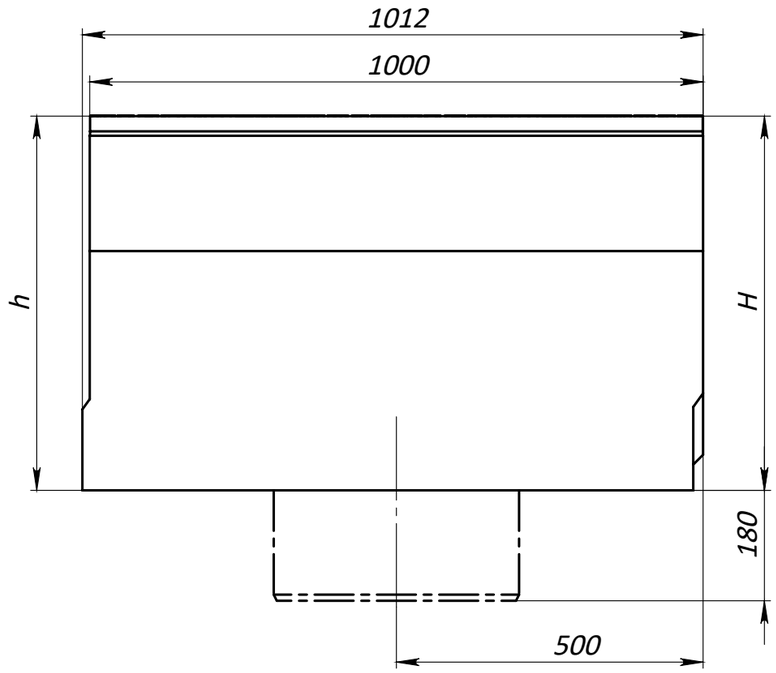


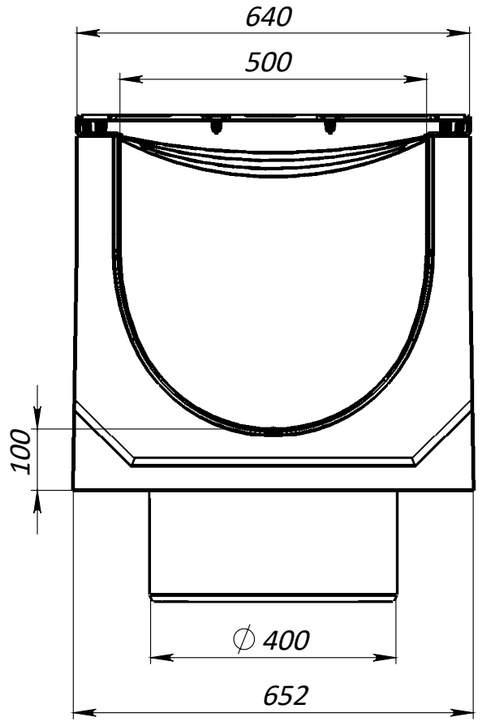

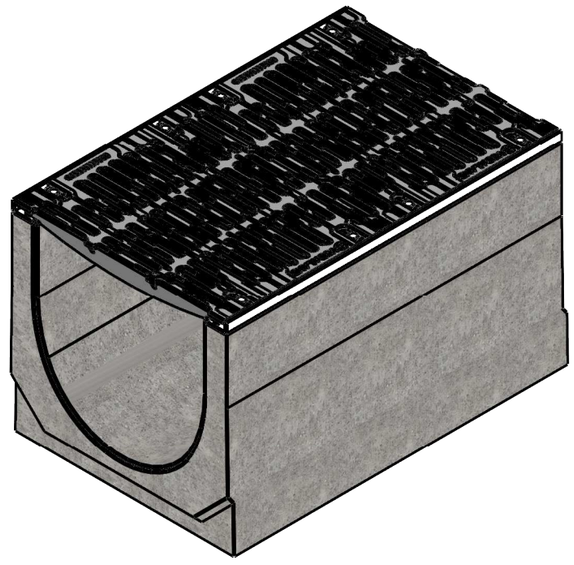

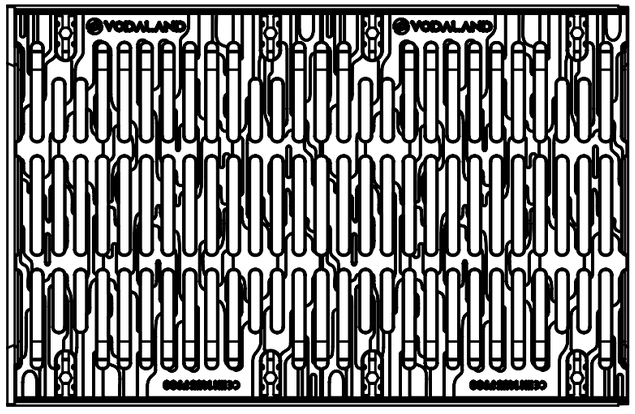


1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:	FINISH:				DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION A-01
	NAME	SIGNATURE	DATE			TITLE: Concrete Drain Channel Mega DN500 H610-460 with Cast Iron Grate F900
DRAWN	O. Dyka		31.05.2024			
CHK'D	V. Kyselytsia					
APPV'D	I. Malynovskiy					
MFG						
Q.A				MATERIAL: Concrete, Cast Iron		ARTICLE: A3
				WEIGHT: kg		SCALE:1:10 / SHEET 1 OF 2


Channel with Grate F900

Cascade 5 mm



Article	H/h, mm	Weight kg
04901/610	610	510,8
04901/605	605	509,1
04901/600	600	507,4
04901/595	595	505,7
04901/590	590	503,9
04901/585	585	502,2
04901/580	580	500,5
04901/575	575	498,8
04901/570	570	497,1
04901/565	565	495,3
04901/560	560	493,6
04901/555	555	491,9
04901/550	550	490,2
04901/545	545	488,5
04901/540	540	486,7
04901/535	535	485,0
04901/530	530	483,3
04901/525	525	481,6
04901/520	520	479,9
04901/515	515	478,1
04901/510	510	476,4
04901/505	505	474,7
04901/500	500	473,0
04901/495	495	471,3
04901/490	490	469,5
04901/485	485	467,8
04901/480	480	466,1
04901/475	475	464,4
04901/470	470	462,7
04901/465	465	460,9
04901/460	460	459,2


Sloped 0,5%



Article	H/h, mm	Weight kg
04901/610-605	610/605	509,9
04901/605-600	605/600	508,0
04901/600-595	600/595	506,3
04901/595-590	595/590	504,6
04901/590-585	590/585	502,8
04901/585-580	585/580	501,1
04901/580-575	580/575	499,4
04901/575-570	575/570	497,7
04901/570-565	570/565	496,0
04901/565-560	565/560	494,2
04901/560-555	560/555	492,5
04901/555-550	555/550	490,8
04901/550-545	550/545	489,1
04901/545-540	545/540	487,4
04901/540-535	540/535	485,6
04901/535-530	535/530	483,9
04901/530-252	530/525	482,2
04901/525-520	525/520	480,5
04901/520-515	520/515	478,8
04901/515-510	515/510	477,0
04901/510-505	510/505	475,3
04901/505-500	505/500	473,6
04901/500-495	500/495	471,9
04901/495-490	495/490	470,2
04901/490-485	490/485	468,4
04901/485-480	485/480	466,7
04901/480-475	480/475	465,0
04901/475-470	475/470	463,3
04901/470-465	470/465	461,6
04901/465-460	465/460	459,8


Channel with Grate F900 and vertical outlet 400

Cascade 5 mm



Article	H/h, mm	Weight kg
0490109/610	610	477,3
0490109/605	605	475,6
0490109/600	600	473,9
0490109/595	595	472,1
0490109/590	590	470,4
0490109/585	585	468,7
0490109/580	580	467,0
0490109/575	575	465,3
0490109/570	570	463,5
0490109/565	565	461,8
0490109/560	560	460,1
0490109/555	555	458,4
0490109/550	550	456,7
0490109/545	545	454,9
0490109/540	540	453,2
0490109/535	535	451,5
0490109/530	530	449,8
0490109/525	525	448,1
0490109/520	520	446,3
0490109/515	515	444,6
0490109/510	510	442,9
0490109/505	505	441,2
0490109/500	500	439,5
0490109/495	495	437,7
0490109/490	490	436,0
0490109/485	485	434,3
0490109/480	480	432,6
0490109/475	475	430,9
0490109/470	470	429,1
0490109/465	465	427,4
0490109/460	460	425,7

Sloped 0,5%



Article	H/h, mm	Weight kg
0490109/610-605	610/605	476,4
0490109/605-600	605/600	474,7
0490109/600-595	600/595	473,0
0490109/595-590	595/590	471,2
0490109/590-585	590/585	469,5
0490109/585-580	585/580	467,8
0490109/580-575	580/575	466,1
0490109/575-570	575/570	464,4
0490109/570-565	570/565	462,6
0490109/565-560	565/560	460,9
0490109/560-555	560/555	459,2
0490109/555-550	555/550	457,5
0490109/550-545	550/545	455,8
0490109/545-540	545/540	454,0
0490109/540-535	540/535	452,3
0490109/535-530	535/530	450,6
0490109/530-252	530/525	448,9
0490109/525-520	525/520	447,2
0490109/520-515	520/515	445,4
0490109/515-510	515/510	443,7
0490109/510-505	510/505	442,0
0490109/505-500	505/500	440,3
0490109/500-495	500/495	438,6
0490109/495-490	495/490	436,8
0490109/490-485	490/485	435,1
0490109/485-480	485/480	433,4
0490109/480-475	480/475	431,7
0490109/475-470	475/470	430,0
0490109/470-465	470/465	428,2
0490109/465-460	465/460	426,5

1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES: ISO 2768 - C
LINEAR:
ANGULAR:

FINISH:

DEBURR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING

REVISION A-01

VODALAND

	NAME	SIGNATURE	DATE
DRAWN	O. Dyka		31.05.2024
CHK'D	V. Kyselytsia		
APPV'D	I. Malynovskiy		
MFG			
Q.A			

TITLE:

Concrete Drain Channel Mega DN500 H610-460 with Cast Iron Grate F900

MATERIAL: Concrete, Cast Iron

ARTICLE:

A3

WEIGHT: kg

SCALE:1:10

SHEET 2 OF 2