


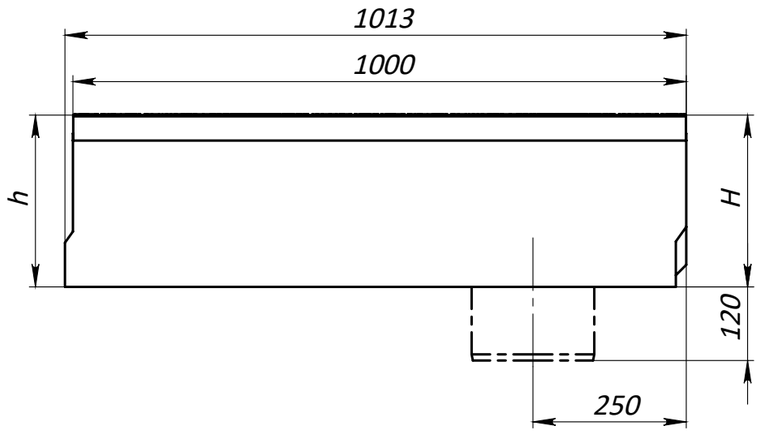


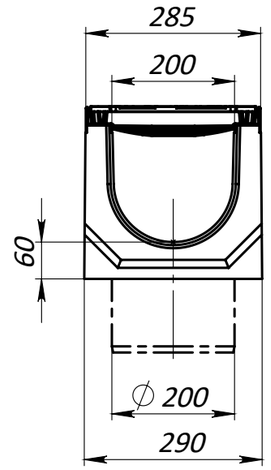


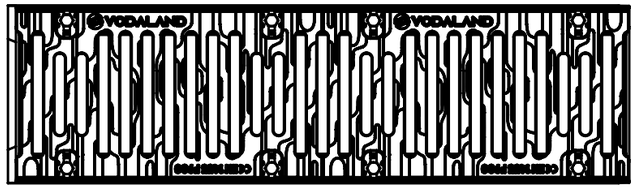

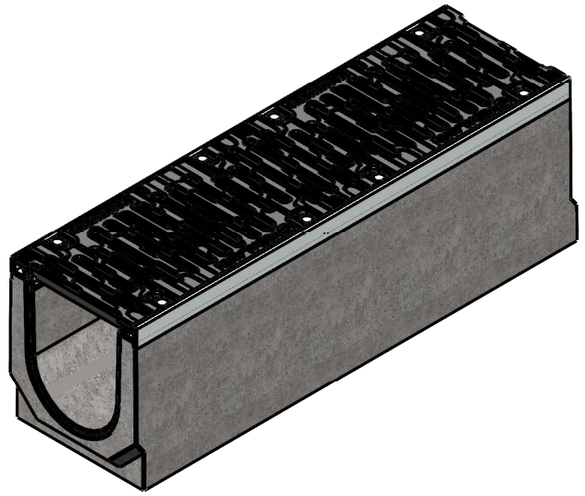


Channel with Grate F900

Cascade 5 mm



Article	H/h, mm	Weight kg
04501/335	335	143,5
04501/330	330	142,5
04501/325	325	141,5
04501/320	320	140,4
04501/315	315	139,4
04501/310	310	138,3
04501/305	305	137,3
04501/300	300	136,2
04501/295	295	135,2
04501/290	290	134,1
04501/285	285	133,1
04501/280	280	132,0
04501/275	275	131,0
04501/270	270	129,9
04501/265	265	128,9
04501/260	260	127,8
04501/255	255	126,8
04501/250	250	125,7
04501/245	245	124,7
04501/240	240	123,6
04501/235	235	122,6
04501/230	230	121,5
04501/225	225	120,5
04501/220	220	119,4
04501/215	215	118,4


Sloped 0,5%



Article	H/h, mm	Weight kg
04501/335-330	335/330	143,0
04501/330-325	330/325	142,0
04501/325-320	325/320	141,0
04501/320-315	320/315	139,9
04501/315-310	315/310	138,9
04501/310-305	310/305	137,8
04501/305-300	305/300	136,8
04501/300-295	300/295	135,7
04501/295-290	295/290	134,7
04501/290-285	290/285	133,6
04501/285-280	285/280	132,6
04501/280-275	280/275	131,5
04501/275-270	275/270	130,5
04501/270-265	270/265	129,4
04501/265-260	265/260	128,4
04501/260-255	260/255	127,3
04501/255-250	255/250	126,3
04501/250-245	250/245	125,2
04501/245-240	245/240	124,2
04501/240-235	240/235	123,1
04501/235-230	235/230	122,1
04501/230-225	230/225	121,0
04501/225-220	225/220	120,0
04501/220-215	220/215	118,9


Channel with Grate F900 and vertical outlet 200

Cascade 5 mm



Article	H/h, mm	Weight kg
0450109/335	335	138,4
0450109/330	330	137,4
0450109/325	325	136,3
0450109/320	320	135,3
0450109/315	315	134,2
0450109/310	310	133,2
0450109/305	305	132,1
0450109/300	300	131,1
0450109/295	295	130,0
0450109/290	290	129,0
0450109/285	285	127,9
0450109/280	280	126,9
0450109/275	275	125,8
0450109/270	270	124,8
0450109/265	265	123,7
0450109/260	260	122,7
0450109/255	255	121,6
0450109/250	250	120,6
0450109/245	245	119,5
0450109/240	240	118,5
0450109/235	235	117,4
0450109/230	230	116,4
0450109/225	225	115,3
0450109/220	220	114,3
0450109/215	215	113,2

Sloped 0,5%



Article	H/h, mm	Weight kg
0450109/335-330	335/330	137,8
0450109/330-325	330/325	136,8
0450109/325-320	325/320	135,7
0450109/320-315	320/315	134,7
0450109/315-310	315/310	133,6
0450109/310-305	310/305	132,6
0450109/305-300	305/300	131,5
0450109/300-295	300/295	130,5
0450109/295-290	295/290	129,4
0450109/290-285	290/285	128,4
0450109/285-280	285/280	127,3
0450109/280-275	280/275	126,3
0450109/275-270	275/270	125,2
0450109/270-265	270/265	124,2
0450109/265-260	265/260	123,1
0450109/260-255	260/255	122,1
0450109/255-250	255/250	121,0
0450109/250-245	250/245	120,0
0450109/245-240	245/240	118,9
0450109/240-235	240/235	117,9
0450109/235-230	235/230	116,8
0450109/230-225	230/225	115,8
0450109/225-220	225/220	114,7
0450109/220-215	220/215	113,7

1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION A-01
	NAME	SIGNATURE	DATE		VODALAND	
DRAWN	O. Dyka		31.05.2024		TITLE: Concrete Drain Channel Mega DN200 H335-215 with Cast Iron Grate F900	
CHK'D	V. Kyselytsia					
APPV'D	I. Malynovskiy					
MFG						
Q.A				MATERIAL: Concrete, Cast Iron	ARTICLE:	A3
				WEIGHT: kg	SCALE:1:10	SHEET 1 OF 1