


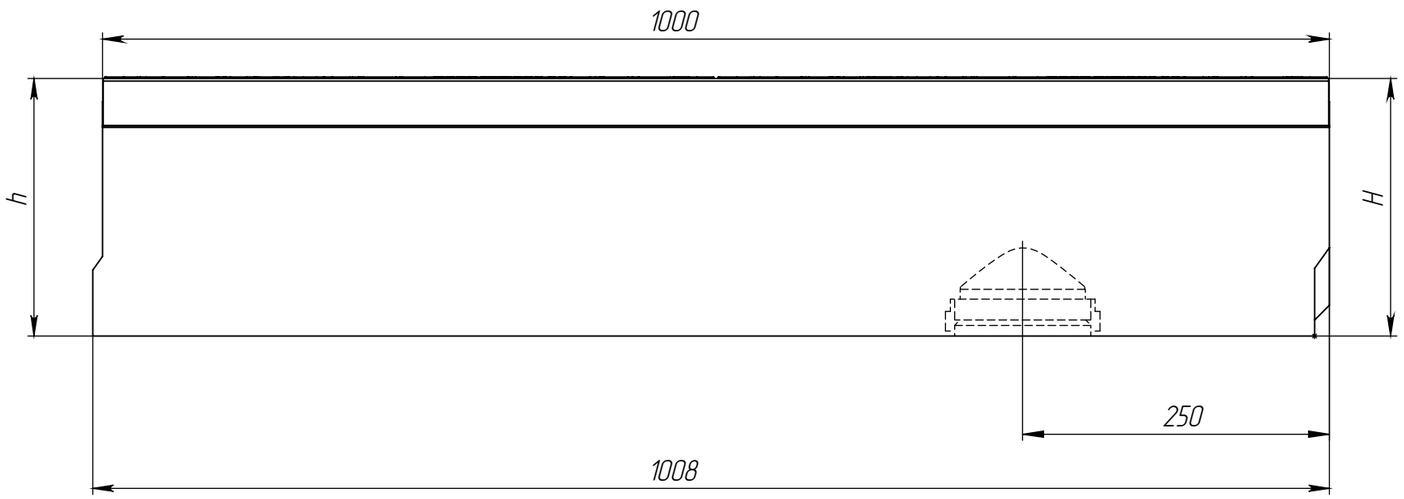


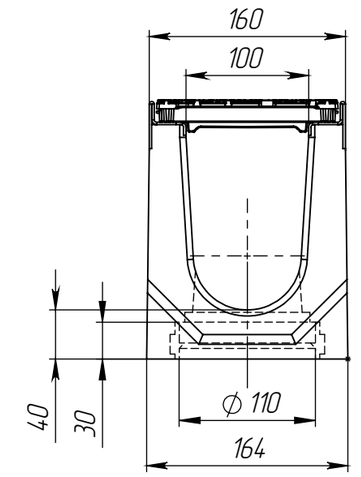


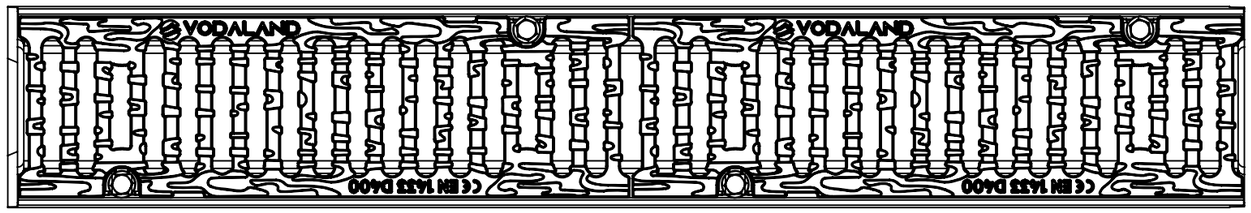

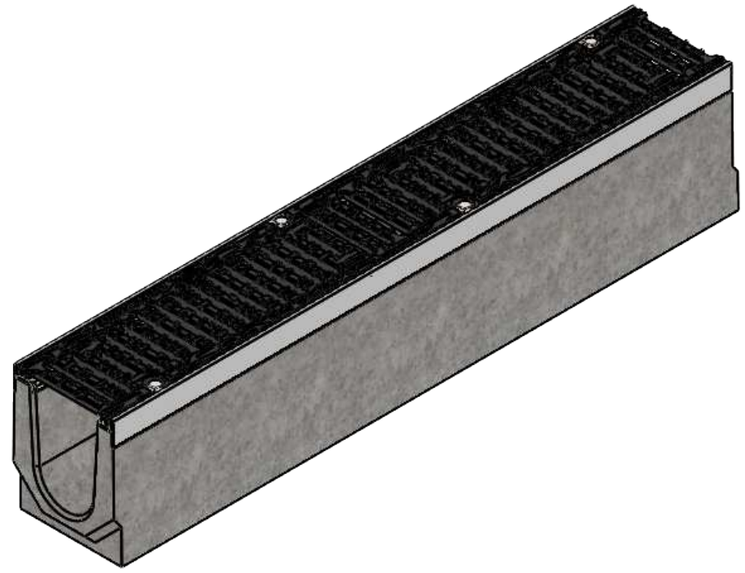


Channel with slotted Grate D400

Cascade 5 мм



Sloped 0,5%




Article	H/h, mm	Weight kg
040071334/230	230	52,7
040071334/225	225	52,0
040071334/220	220	51,3
040071334/215	215	50,6
040071334/210	210	49,9
040071334/205	205	49,3
040071334/200	200	48,6
040071334/195	195	47,9
040071334/190	190	47,2
040071334/185	185	46,5
040071334/180	180	45,9
040071334/175	175	45,2
040071334/170	170	44,5
040071334/165	165	43,8
040071334/160	160	43,1
040071334/155	155	42,5
040071334/150	150	41,8
040071334/145	145	41,1
040071334/140	140	40,4
040071334/135	135	39,7
040071334/130	130	39,0
040071334/125	125	38,4
040071334/120	120	37,7


Article	H/h, mm	Weight kg
040071334/230-225	230/225	51,8
040071334/225-220	225/220	51,2
040071334/220-215	220/215	50,5
040071334/215-210	215/210	49,8
040071334/210-205	210/205	49,1
040071334/205-200	205/200	48,4
040071334/200-195	200/195	47,8
040071334/195-190	195/190	47,1
040071334/190-185	190/185	46,4
040071334/185-180	185/180	45,7
040071334/180-175	180/175	45,0
040071334/175-170	175/170	44,4
040071334/170-165	170/165	43,7
040071334/165-160	165/160	43,0
040071334/160-155	160/155	42,3
040071334/155-150	155/150	41,6
040071334/150-145	150/145	41,0
040071334/145-140	145/140	40,3
040071334/140-135	140/135	39,6
040071334/135-130	135/130	38,9
040071334/130-125	130/125	38,2
040071334/125-120	125/120	37,6

Channel with slotted Grate D400
and vertical outlet 110

Cascade 5 мм



Sloped 0,5%



Article	H/h, mm	Weight, kg
04007133409/230-P110	230	51,6
04007133409/225-P110	225	51,0
04007133409/220-P110	220	50,3
04007133409/215-P110	215	49,6
04007133409/210-P110	210	48,9
04007133409/205-P110	205	48,2
04007133409/200-P110	200	47,6
04007133409/195-P110	195	46,9
04007133409/190-P110	190	46,2
04007133409/185-P110	185	45,5
04007133409/180-P110	180	44,8
04007133409/175-P110	175	44,2
04007133409/170-P110	170	43,5
04007133409/165-P110	165	42,8
04007133409/160-P110	160	42,1
04007133409/155-P110	155	41,4
04007133409/150-P110	150	40,8
04007133409/145-P110	145	40,1
04007133409/140-P110	140	39,4
04007133409/135-P110	135	38,7
04007133409/130-P110	130	38,0
04007133409/125-P110	125	37,4
04007133409/120-P110	120	36,7

Article	H/h, mm	Weight kg
04007133409/230-225-P110	230/225	50,8
04007133409/225-220-P110	225/220	50,2
04007133409/220-215-P110	220/215	49,5
04007133409/215-210-P110	215/210	48,8
04007133409/210-205-P110	210/205	48,1
04007133409/205-200-P110	205/200	47,4
04007133409/200-195-P110	200/195	46,8
04007133409/195-190-P110	195/190	46,1
04007133409/190-185-P110	190/185	45,4
04007133409/185-180-P110	185/180	44,7
04007133409/180-175-P110	180/175	44,0
04007133409/175-170-P110	175/170	43,4
04007133409/170-165-P110	170/165	42,7
04007133409/165-160-P110	165/160	42,0
04007133409/160-155-P110	160/155	41,3
04007133409/155-150-P110	155/150	40,6
04007133409/150-145-P110	150/145	40,0
04007133409/145-140-P110	145/140	39,3
04007133409/140-135-P110	140/135	38,6
04007133409/135-130-P110	135/130	37,9
04007133409/130-125-P110	130/125	37,2
04007133409/125-120-P110	125/120	36,6

1. *Dimensions for reference*
2. *Delivery and packaging are carried out in accordance with the terms of the contract*
3. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product*
4. *Deviation of the actual weight of the nominal can be up to 10%.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES			DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE			VODALAND	
DRAWN	Olender		07.11.23			TITLE: Concrete Drain Channel Pro DN100 H120-230 with Cast Iron Grate D400	
CHK'D	Kyselytsia						
APPV'D	Malynovskiy						
MFG							
Q.A				MATERIAL: Concrete, Cast Iron		ARTICLE:	A3
				WEIGHT: kg		SCALE:1:5	SHEET 1 OF 1