


Agujas hidráulicas para calderas

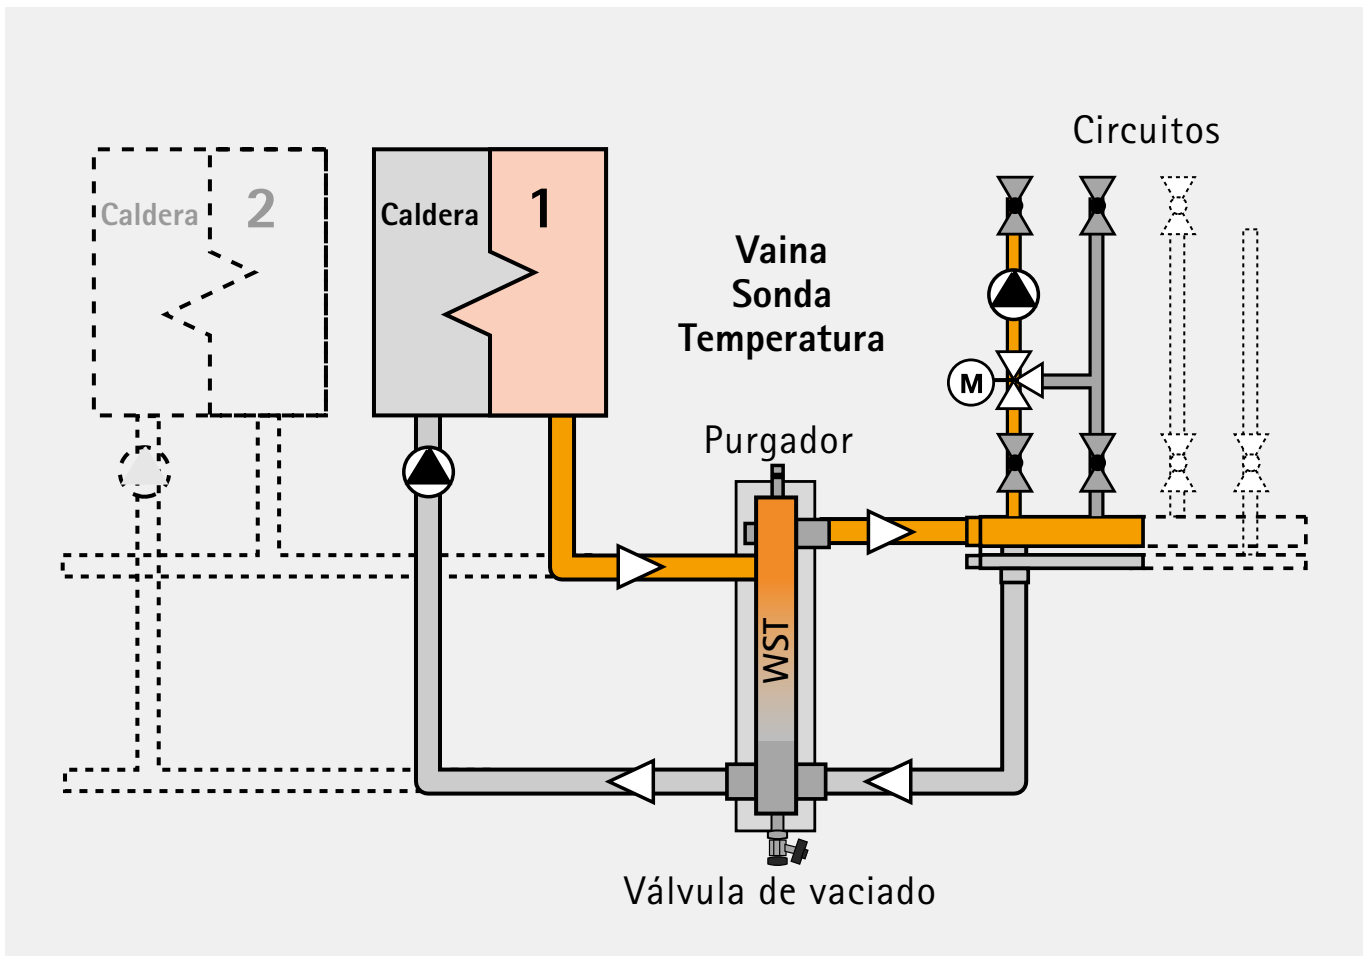

Modelo	Cuerpo mm	Conexión caldera	Caudal máx. m ³ /h	20/120 L					
				20°C		15°C		10°C	
				Potencia kW	Caudal primario m ³ /h	Potencia kW	Caudal primario m ³ /h	Potencia kW	Caudal primario m ³ /h
WST 80	80x80	R2"	9	210	9	157,5	6,75	105	4,5
WST 120	120x120	DN65	12	280	12	210	9	140	6
WST 160	160x160	DN80	21	489	21	366,75	15,75	244,5	10,5
WST 200	200x200	DN100	29	674	29	505,5	21,75	337	14,5
WST 250	250x250	DN125	45	1046	45	784,5	33,75	523	22,5
WST 300	300x300	DN150	65	1512	65	1134	48,75	756	32,5
WST 350	350x350	DN200	95	2210	95	1657,5	71,25	1105	47,5
WST 400	400x400	DN250	125	2907	125	2180,25	93,75	1453,5	62,5